



**G-Cora™**



SWING TYPE



FOLDING TYPE



3 Steps to 4 Steps Planetary Gear Reducer

High Precision 4 Start Ball Screw

**Gmatic®** **Gmatic® Pro**

Why choose Gmatic Autogate OS

- ▶ Long Lifespan with solid coated gearbox base
- ▶ Solar Power or Dual Power mode for powering the gate motors.
- ▶ Intelligence System with self calibration for smooth operation of autogate.



▶ Technical Specification

Item	G-Cora 680	G-Cora 830
Power Supply	AC220~240V	AC220~240V
Motor Power Supply	16~20VDC	16~20VDC
Maximum Gate Weight (per leaf)	200kg	420kg
Maximum Gate Width (per leaf)	2.5m	3.5m
Maximum Stroke	260mm	410mm
Output Stroke Speed	10~14m/s	10~14m/s


Item	G-Cora 680	G-Cora 830
Maximum Opening Angle	95°~110°	95°~110°
Motor Weight	8.4kg (Double)	8.6kg (Double)
Operating Temperature	-20°C to 40°C	-20°C to 40°C
Degree Of Protection	IP54	IP54
Manual Option	Release key during power failure	

▶ Technical Specification

Item	Gmatic	Gmatic Pro
Power Supply	AC220~240V	AC220~240V
Motor Power Supply	14~18VDC	14~18VDC
Maximum Gate Weight (per leaf)	300 kg	500 kg
Maximum Gate Width (per leaf)	4.0 m	5.0 m
Output Speed	10~15m/s	10~15m/s

Item	Gmatic	Gmatic Pro
Maximum Opening Angle	85°~110°	85°~110°
Motor Weight	6.4 kg (Double)	6.4 kg (Double)
Operating Temperature	-20°C to 40°C	-20°C to 40°C
Degree Of Protection	IP54	IP54
Manual Option	Release key during power failure	


SLIDING TYPE

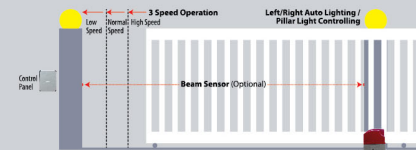

**EMATIC®**

**iSlide®**

**iSlide® 2**

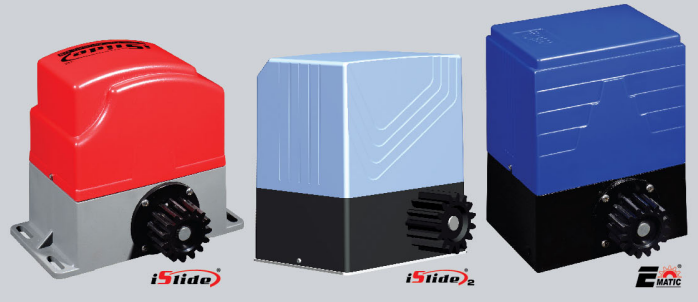

▶ Technical Specification

Item	iSlide	Ematic
Power Supply	AC220~240V	AC220~240V
Motor Power Supply	12~24VDC	12~24VDC
Maximum Sliding Gate Weight	500 kg	600 kg
Maximum Output Motor Speed	2800 rpm	2800 rpm
Sliding Gate Speed	12 meter/s	12 meter/s

Item	iSlide	Ematic
Motor Weight	5.2kg	6.5kg
Safety Clutch	Auto-reverse electronic counter technology	
Operating Temperature	-20°C to 110°C	-20°C to 110°C
Degree Of Protection	IP55	IP55
Manual Option	Release key during power failure	