


DS-2CC51A2P(N)-DG1

700 TVL Mini Camera

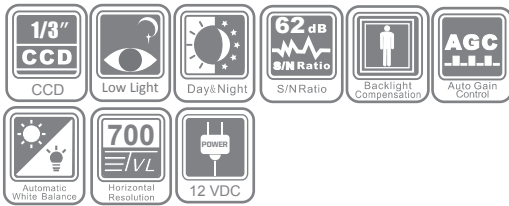

Key features

- 1/3" SONY CCD
- 700TVL Horizontal Resolution
- Electronic Day/Night
- Super low illumination
- Compact Design

DS-2CC51A2P(N)-DG1	
Camera	
Image Sensor	1/3" SONY CCD
Signal System	PAL/NTSC
Effective Pixels	PAL: 976 (H) × 582 (V) NTSC: 976 (H) × 494 (V)
Min. Illumination	0.002 Lux @ (F1.4, AGC ON) 0.006 Lux @ (F2.5, AGC ON)
Shutter speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	3.7 mm @ F2.5 (2.8 mm optional) Angle of view: 70° (3.7 mm)
Lens Mount	M12
Day & Night	Electronic
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 1 W
Dimensions	30×30×19 mm
Weight	200 g (0.44 lbs)

Available models

PAL: DS-2CC51A2P-DG1
NTSC: DS-2CC51A2N-DG1

Dimensions

