



BG-2035/2060/2120 MIXER AMPLIFIER



***Introducing a new standard of excellence for
BGM applications.***

Affordable new solutions for

TOA's new performance-oriented, cost-effective amplifiers.

The new BG-2000 Series of mixer/amplifiers have been designed to meet the requirements that users most request. Utilizing TOA's technological expertise and total reliability in cost-effective amplifier designs with the most useful features and functions has created a new amplifier series ideal for paging, music distribution and music-on-hold applications. These advantages along with quick setup and easy installation capability make the new BG Series ideal for use in a wide range of environments from meeting rooms to restaurants and retail stores.

Incorporating TOA's no-compromise technology.

The new BG-2000 Series incorporates all the performance and audio quality that TOA amplifiers are known for, such as an extended frequency response, high S/N ratios and minimal distortion. Output regulation is also ultra-stable. In addition, the new BG-2000 Series are equipped with removable terminal blocks making them easy to install and configure in a system.



Applications

The new BG/BA Series is tailor-made for BGM distribution with its high performance, reliability and affordability.

Best choice for installations in restaurants, retail stores, fast food outlets, bars, lounges, cafes, classrooms, meeting rooms and similar mid-sized locations.

specific BGM requirements.



BG-2035/2060/2120

- Compact five channel Mixer Amplifier for paging, background/foreground music distribution and music/messaging-on-hold.
- All inputs/outputs have removable terminal blocks for quick and easy installation.
- Phantom Power (+ 24V DC) incorporated for MIC input.
- 3 line inputs, with Line 1 line/tel switchable, while Line 2 and 3 are equipped with RCA pin jacks.
- Module slot accepts 900 Series input plug-in modules for custom system configurations.
- 2-channel broadcast system capability together with zone 2 expansion capability (when used with BA-200 Series).
- Any of 5 inputs assignable to MOH/ZONE 2 out on the BG-2035/2060/2120 to fulfill specific BGM requirements.
- Rear panel-mounted DIP switches allow easy settings.
- Tamper-proof, front-panel bass and treble controls are recessed to protect their settings.
- Auto/manual mute function with adjustable muting sensitivity.
- Incorporates Remote volume control connection.




Lounges (Zone 1)



BA-235/260

- Targets simple BGM applications using a single audio source without paging or MOH requirements.
- Remote master volume control.
- RCA pin jack line input.

Restaurant (Zone 2)

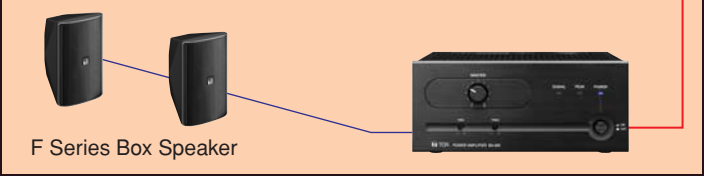

BG/BA Series common features

- Thermal protection circuits shut down to protect system should overheating occur.
- Accessory security knobs for volume control prevent unauthorized volume setting changes.
- Rack-mount kit options.
- UL/cUL listed.
- Five Year Warranty.


SPECIFICATIONS

Model No.	BG-2035	BG-2060	BG-2120
Power Source	120 V AC, 60 Hz		
Rated Output	35 W	60 W	120 W
Power Consumption	94 W (rated output), 50 W (based on cULus standards)	163 W (rated output), 80 W (based on cULus standards)	265 W (rated output), 120 W (based on cULus standards)
Frequency Response	50 Hz – 20k Hz		
Total Harmonic Distortion	0.5% or less, at 1 kHz, rated output		
Input	Mic: –60dB*, 600 Ω , electronically balanced, removable terminal block Line 1: –10 dB*/TEL: –20 dB* Line 1/TEL: selectable, 10k Ω , electronically balanced, removable terminal block Line 2, 3: –10 dB*, 10 k Ω , unbalanced, removable terminal block or RCA jack Module		
Output	Speaker 4 Ω , 25 V (18 Ω), 70 V (140 Ω) balanced, removable terminal block	4 Ω , 25 V (10 Ω), 70 V (83 Ω) balanced, removable terminal block	4 Ω , 25 V (5.2 Ω), 70 V (42 Ω) balanced, removable terminal block
	MOH Line	0 dB*, 600 Ω , balanced, removable terminal block 0 dB*, 600 Ω , unbalanced, removable terminal block	
Output Regulation	2 dB or less, no load to full load (1k Hz)		
Phantom Power	On/Off switch for Mic,+24V DC		
S/N Ratio	Mic: 60 dB or more, Line 1/TEL, Line 2, 3, Module: 75 dB or more (Band Pass: 20 Hz – 20 kHz, Tone Controls: Centered)		
Tone Control	Bass: \pm 10 dB at 100 Hz, Treble: \pm 10 dB at 10k Hz		
Muting	Manual mute/Automatic mute		
Control	Mic gain control, Line 1/TEL gain control, Line 2 gain control, Line 3 gain control, Module: gain control, Bass tone control, Treble tone control, MOH out gain control, Mute control (Manual mute), Remote volume control, Mute sense control, Line 1/TEL selector switch, Phantom power switch (Mic), Auto mute switch (Mic, Line 1/TEL, Module), Mute receive switch (Mic, Line 1/TEL, Line 2, 3, Module), MOH assign switch (Mic, Line 1/TEL, Line 2, 3, Module), Power ON/OFF switch		
Indicator	Power LED, Signal level LED, Peak LED		
Operating Temperature	0°C to 40 °C (32°F to 104 °F)		
Operating Humidity	35 % to 80 % RH (no condensation)		
Finish	Panel: ABS resin, black/Case: Steel plate, black, paint		
Dimensions	264 (W) \times 94.3 (H) \times 267.3 (D)mm (10.39" \times 3.71" \times 10.52")		
Weight	5.3 kg (11.68 lb)	5.3 kg (11.68 lb)	6 kg (13.23 lb)
Accessory	Volume control cover: YA-920 \times 5, Removable terminal plug (2 pins) \times 4, Removable terminal plug (3 pins) \times 2, Removable terminal plug (4 pins) \times 1, Removable terminal plug (5 pins) \times 1		
Option	Rack mounting brackets: MB-1000		

*0dB = 1V

Model No.	BA-235	BA-260
Power Source	120 V AC, 60 Hz	
Rated Output	35 W	60 W
Power Consumption	90 W (rated output), 52 W (based on cULus standards)	130 W (rated output), 66 W (based on cULus standards)
Frequency Response	50 Hz – 20k Hz	
Total Harmonic Distortion	0.5% or less, at 1k Hz, rated output	
Input	Line input: 0 dB*/+4 dB* (selectable), 10k Ω , unbalanced, removable terminal block or RCA jack	
Output	Speaker 4 Ω , 25 V (18 Ω) and 70 V (140 Ω), balanced, removable terminal block	4 Ω , 25 V (10 Ω) and 70 V (83 Ω) balanced, removable terminal block
	Bridge	Parallel in Line input, removable terminal block
Output Regulation	2 dB or less, no load to full load (1k Hz)	
S/N Ratio	80 dB or more (Band Pass: 20 Hz – 20k Hz, Tone Controls: Centered)	
Tone Control	Bass: \pm 10 dB at 100 Hz, Treble: \pm 10 dB at 10k Hz	
Control	Master gain control, Bass tone control, Treble tone control, Input level selector switch, Remote Volume control, Power ON/OFF switch	
Indicator	Power LED, Signal level LED, Peak LED	
Operating Temperature	0°C to 40 °C (32°F to 104 °F)	
Operating Humidity	35 % to 80 % RH (no condensation)	
Finish	Panel: ABS resin, black/Case: Steel plate, black, paint	
Dimensions	210 (W) \times 94.3 (H) \times 265 (D)mm (8.27" \times 3.71" \times 10.43")	
Weight	4 kg (8.82 lb)	4.6 kg (10.14 lb)
Accessory	Volume control cover: YA-920 \times 1, Removable terminal plug (2 pins) \times 3, Removable terminal plug (4 pins) \times 1	
Option	Rack mounting brackets: MB-25B-BK, MB-25B-J	

*0dB = 1V



Human Society with
Sound & Communication

TOA Electronics, Inc.
www.toaelectronics.com
Tel: 1-800-733-4750
Fax: 1-800-733-9766

TOA Canada Corporation
www.toacanada.com
Tel: 1-800-263-7639
Fax: 1-800-463-3569

Specifications are subject to change without notice.
(1003) 833-52-408-10 u