



Progressive Technology Enhanced Cameras



3Megaapixel Full HD Weatherproof
Network IR Camera

SNO-7082R

The SNO-7082R is designed for advanced surveillance solutions incorporating Full 3 megapixel HD resolution. Progressive technologies incorporated into SNO-7082R include advanced WDR(Wide Dynamic Range) to provide superior images in high contrast scenes, Simple Focus to improve image quality when switching between color and B/W modes. SDR (Samsung Super Dynamic Range) to enhance color reproduction and resolution and reduce signal noise. Additional functions include: face detection - prioritizing faces in an image, audio detection - alerting the system to events beyond the camera's field of view, ROI (Region of Interest) - spotlighting the critical areas in the camera's field of view, and True Day/Night for superior images in the dark. The SNO-7082R is rated IP66 - ensuring protection against dust/water.

- Max 3M (2048 x 1536), 16 : 9 Full HD (1080p) resolution
- H.264 & MJPEG dual codec
- 3 ~ 8.5mm (2.8x) motorized varifocal lens • Simple Focus
- Advanced WDR (96dB) / 30fps@2MP WDR
- Face Detection, Audio Detection
- UPnP (Auto Port Forwarding) • IP66

3Megapixel Full HD Weatherproof Network IR Camera

SNO-7082R




Specifications



SNO-7082RN/P	
VIDEO	
Imaging Device	1/3" 3.1M PS CMOS
Total Pixels	2,064 (H) x 1,578 (V)
Effective Pixels	2,052 (H) x 1,536 (V)
Scanning System	Progressive
Min. Illumination	Color : 0.7 Lux (F1.2, 50IRE), 0.011 Lux (Sens up 60x) B/W : 0 Lux (F1.2, 50IRE, IR LED on)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 704 x 480(N), 704 x 576(P), for installation
LENS	
Focal Length (Zoom Ratio)	3 ~ 8.5mm (2.8x) motorized varifocal
Max. Aperture Ratio	F1.2
Angular Field of View	H : 87.3° (Wide) ~ 31.2° (Tele), V : 64.5° (Wide) ~ 23.4° (Tele)
Min. Object Distance	0.5m (1.64ft)
Focus Control	Manual, Simple focus, Day&Night
Lens Type	DC auto iris
Mount Type	Board-in type
OPERATIONAL	
IR LED	32ea
Viewable Length	30m (98.43ft)
Camera Title (OSD)	Off / On (Displayed up to 15 characters)
Day & Night	Auto (ICR) / Color / B/W / External
Backlight Compensation	Off / BLC / HLC
Wide Dynamic Range	Off / On (96dB) 3M Mode : 20fps, 2M Mode : 30fps
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)
Digital Noise Reduction	SSNRll (2D+3D noise filter) (Off / On)
Motion Detection	Off / On (4 rectangular zones)
Privacy Masking	Off / On (1ea 4 point polygonal + 16ea rectangular zones)
Sens-up (Frame Integration)	Off / Auto (2x ~ 60x)
Gain Control	Off / Low / Midium / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	Auto / A.FLK / Manual (1/30 ~ 1/12,000sec)
Flip / Mirror	Off / On
Intelligent Video Analytics	Audio detection, Face detection, Tampering, Virtual line, Enter / Exit, Appear / Disappear
Alarm I/O	Digital 1/1 (Relay)
Alarm Triggers	Motion detection, Video Analytics, Sensor Input
Alarm events	File upload via FTP, E-Mail / Notification via E-Mail, TCP /Local storage (SD/SDHC) recording at network disconnected
NETWORK	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264 (MPEG-4 Part 10/AVC), MJPEG
Resolution	3M Mode - 2048 x 1536 / 1920 x 1080 / 1600 x 1200 / 1280 x 1024 / 1280 x 960 / 1280 x 720 / 1024 x 768 / 800 x 600 / 800 x 450 / 640 x 480 / 320 x 240 / 320 x 180 2M Mode - 1920 x 1080 / 1280 x 1024 / 1280 x 960 / 1280 x 720 / 1024 x 768 / 800 x 600 / 800 x 450 / 640 x 480 / 640 x 360 / 320 x 240 / 320 x 180
Max. Framerate	3M Mode - H.264 : Max 20fps at all resolutions MJPEG : 800 x 600 ~ 320 x 180 - 20 fps 1024 x 768 ~ 1920 x 1080 - 15 fps / 2048 x 1536 - 10 fps 2M Mode - H.264 : Max 30fps at all resolutions MJPEG : 800 x 600 ~ 320 x 180 - 30 fps 1024 x 768 ~ 1920 x 1080 : 15 fps
Smart Codec	Yes (Area based method)
Video Quality Adjustment	H.264 : Compression level, Target bitrate level control / MJPEG : Quality Level Control
Bitrate Control Method	H.264 : CBR or VBR / MJPEG : VBR
Streaming Capability	Multiple streaming (Up to 6 profiles)
Audio I/O	Mic/Line in , Line out
Audio Compression Format	G.711, G.726
Audio Communication	Bi-directional
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/ v2c / v3 (MIB-2), ARP, DNS, DDNS, QoS, UPnP
Security	HTTPS (SSL) login authentication, Digest login authentication, IP address filtering, User access log, 802.1X authentication
Streaming Method	Unicast / Multicast
Max. User Access	10 users at unicast Mode
Memory Slot	SD / SDHC memory slot (4GB included)
ONVIF Conformance	Yes
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatian, Hungarian, Greek, Norwegian, Finnish
Web Viewer	Supported OS : Windows XP / VISTA / 7, MAC OS X 10.7 or higher Supported Browser : Internet explorer 7.0 or higher, Firefox 9.0 or higher, Chrome 15.0 or higher, Safari 5.1 or higher
Central Management Software	NET-i viewer, SSM (Samsung Security Manager)
ENVIRONMENTAL	
Operating Temperature / Humidity	AC24V : -50°C ~ +55°C (-58°F ~ +131°F) / ~ 90% RH DC12V, PoE : -10°C ~ +55°C (+14°F ~ +131°F) / Less than 90% RH * Heater works at AC
Ingress Protection	IP66 Grade (Waterproof)
ELECTRICAL	
Input Voltage / Current	DC 12V, PoE : (IEEE802.3af)
Power Consumption	Max. 12.95W (DC 12V, AC 24V, PoE(class3) - Heater off) / Max. 18.5W (AC 24V - Heater on)
MECHANICAL	
Color / Material	Dark Gray / Metal
Dimension (WxHxD)	Ø114.0 x 383.0mm (Ø4.49" x 15.08")
Weight	1.73Kg (3.81lb)

Dimensions

Unit : mm (inch)

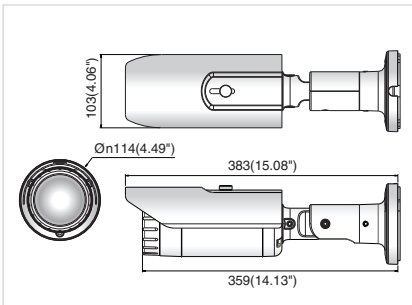

The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



SAMSUNG TECHWIN CO., LTD. 701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741 ~ 8749, 8752 ~ 8760 Fax : +82-31-8018-3745 www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA INC.
100 Challenger Rd. Suite 700 Ridgefield Park, NJ 07660
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920
Fax : +1-201-373-0124
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.
Samsung House, 1000 Hillwood Drive, Hillwood Business Park
Chertsey, Surrey, UNITED KINGDOM KT11 6 OPS
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.
No. 11 Wei 6 Street, Micro-Electronic Industrial Park
Jingang Road, Tianjin, P.R. CHINA 300385
Tel : +86-22-23887788 Fax : +86-22-23887788



SAMSUNG TECHWIN