



BlackPro Series

Line Interactive UPS

A Brilliant And Affordable Compact UPS For Office Desktop System And IT Equipments

- Digital Microprocessor Controlled For High Reliability Design
- Built-In Boost & Buck Automatic Voltage Regulator (AVR)
- User Friendly Hot-swappable Battery Replacement System
- Maintenance Free User Resettable Circuit Breaker
- Internet/Modem Surge Protection
- Overload & Short Circuit Protection
- Built-In Surge/Spike Protection And EMI Filter
- Smart Communication Port For
Power Management USB / RS232(Optional)
- Power Management Software For Major OS
- Quality Battery For Durability And Extended Backup Time
- Green Power Design To Conserve Battery Energy
- Extended Warranty Up To 5 Years (Optional)



(BP1K0E - BP2K2E)



(BP800C-USB)



A New Lifestyle with
NEUR POWER™

A Preferred Power Solutions Strategic Business Partner

Line Interactive UPS

A Brilliant And Affordable Compact UPS For Office Desktop System And IT Equipments

Specification


Models		NP-BP800C-USB	NP-BP1K0E	NP-BP1K2E	NP-BP1K5E	NP-BP2K0E	NP-BP2K2E
Power Rating		800VA	1000VA	1200VA	1500VA	2000VA	2200VA
Input	Nominal	230 Vac					
	Range	160 - 290 Vac					
	Frequency	50 / 60 Hz					
Output	Nominal	230 Vac					
	Voltage Regulation (Batt. Mode)	+/- 10%					
	Frequency (Batt. Mode)	50 / 60 Hz +/- 1 Hz					
	Current	3.5 A	4.3 A	5.2 A	6.5 A	8.7 A	9.6 A
	Waveform	Simulated Sinewave					
Battery	Outlets	2xUniversal	4 x IEC				
	Rating (QTY)	12V 7.2AH (1)	12V 7.2AH (2)		12V 9AH (2)		
	Type	Sealed Lead Acid Maintenance Free					
	Recharge Time	6 to 8 Hours to 90% After Complete Discharge					
	Replacement	N/A	User Friendly Front Access Hotswappable Battery System				
	Backup Time*	15 To 30 minutes For a PC + 15" Monitor	15 To 30 minutes For 2 x PC + 15" Monitor				
Protection	Surge/Spike	Yes					
	Overload	Yes					
	Internet/Modem	Yes (Voltage Suppression) - RJ11	Yes (Voltage Suppression) - RJ45				
	Input Main	Electronic Internal Current Limiting	User Resettable Circuit Breaker				
Transfer Time	Typically 2 - 4 ms						
Display	Informative LEDs	Normal Mode, Battery Mode, Faults	Normal Mode, Load level & Battery Capacity Level, Faults				
Audible Alarm	Battery Mode, Low Battery, Overload & Faults						
Connectivity	Interface	USB	USB / RS232 (Optional)				
	Software	Winpower - Support Windows Family, Linux, Mac, Sun Solaris & Sparc, IBM AIX, Hp-Ux and Others					
Operating Environment	Temperature	0 to 40°C					
	Humidity	0 - 90% Without Condensation					
	Noise Level	Less Than 40dB at 1 Meter					
Physical	Dimension, DxWxH mm	278 x 100 x 143	368 x 140 x 180				
	Weight, kg	5.0	13.8	13.8	14.2	16.0	16.0

Specification Subject To Change Without Prior Notice.

* Typical Backup Time Depending On Load, Operating Environment And Battery Health




BP800C-USB
(Front Panel)

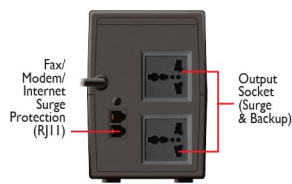

BP800C
(Rear Panel)



BP1K0E - BP2K2E
(Front Panel)

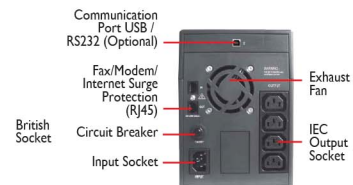

BP1K0E - BP2K2E
(Rear Panel)

Nationwide Service Network:



NEUROPOWER (M) SDN. BHD. (637145-P)
D7-3A, Block D7, Dana 1, Commercial Centre
Jalan PJU 1A/46, 47301 Petaling Jaya, Selangor Darul Ehsan
Hunting Line: +603 7842 9190 Fax: +603 7842 9245