



SAMSUNG SNS

Samsung
SMART Doorlock

Keyless & Safe *SHARK*



Enhanced Lock
Double Claw Bolt




Intrusion Prevention
Infrared Ray Sensor

SHS-2320

Enhanced Security

Enhanced Lock / Double Claw Bolt

The addition of double claw bolts is a further measure to prevent forced intrusion, ensuring your safety.



Intrusion Prevention / Infrared Ray Sensor




The door can not be opened even if the Open/Close button is pressed inside unless the sensor detects inside movement.

Double Authentication Mode / Both RFID card & User Access Code

With double authentication mode set up, both user access code and card must be authenticated to open the door, strengthening security. (Optional)



Anti-theft Set up / One button – One touch

When leaving, the user can set up the anti-theft function by simply pressing  button, preventing any tampering by creating a warning sound.



Random Security Code Feature


User access code will be pressed after pressing two random numbers, preventing intruders from checking the fingerprint marks left.



2 random numbers appear before entering user access code



Press the user access code



Impossible to guess user access code due to random fingerprint mark

Convenient Accessibility

User Access Code



RFID Card or Key Tag









User-friendly Interface


User-friendly Graphic Interface

Using and managing the doorlock system is easier than ever before with simple icons indicating the relevant status.



-  Low Battery Indicator
-  Double Locking Mode
-  Authentication/Setup Failure
-  Authentication/Setup Success
-  Intrusion/Fire/Security Breach Incident
-  Word Count of User Access Code Entered

Body Structure

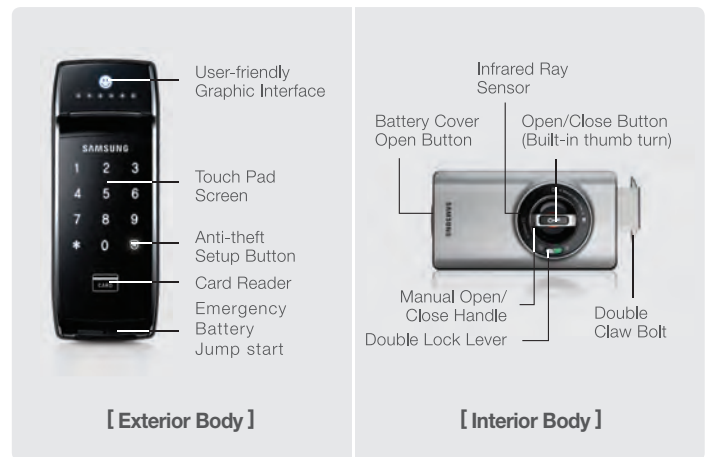

Specifications

RF Card	Module Type: RIFD (ISO 14443A / 13.56MHz RF chip / 2 pcs)	Battery Life	Approximately 10 months (average – 10 times per day)
User Access Code Digit	4~12 Digit Number Combination	Humidity	20 ~ 80%
User Capacity	1 (User access code) 20 (RF card/ Key tag)	Temperature	-20°C ~ +60°C
Material	Exterior Body: Aluminum, Acrylate and Nitrile Butadiene Rubber Interior Body: Aluminum, Polycarbonate, Acrylate and Stainless Steel	Size(WxHxD)	Exterior Body: 65.2x170.5x22.5 mm Interior Body: 182x90x40.7 mm
Power	DC 6V(AA Alkaline batteries) x 4pcs	Lock Set	Rim lock type (Double claw deadbolt)
		Door Thickness	Applicable 40~50 mm

Network Specialist
SAMSUNG SNS
www.samsungsns.com
sales.smarthome@samsung.com