




## CNC4310-II – 2MP H.265+ IR IP Dome Camera

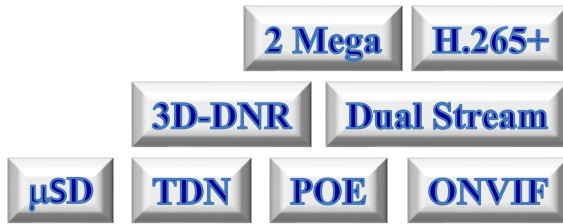

### Features

- 2.0 MP 1920x1080 @25fps
- **H.265+** Compression
- ONVIF compatible
- **2.8mm** or **4mm** Fixed Lens
- 3D-DNR, DWDR, DSS
- ROI, Mirror, Privacy Mask
- Dual Stream, 10/100 Base-T
- Day&Night by Filter Change
- 30m IR Range
- Support **μSD** card up to 128GB
- Reset key
- Smart : Line Crossing & Intrusion Detection
- Vandal Resistant

### SPECIFICATION

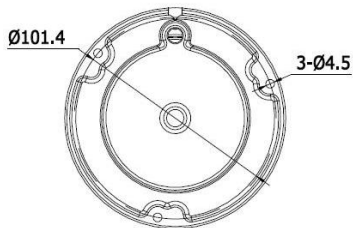

| Model                | CNC4310-II                                 |
|----------------------|--|
| Image Sensor         | 1/2.8" progressive scan CMOS Sensor        |
| Resolution           | 1920x1080@25fps (PAL)                      |
| Shuttle              | 1/3s ~ 1/100,000s                          |
| Lens                 | M12 2.8mm or 4mm Fixed Lens                |
| LEDs                 | 30nos $\phi$ 5 850nm IR LED                |
| Day & Night          | Filter Change or TDN (True Day & Night)    |
| Minimum Illumination | 0 Lux up to 30m                            |
| Network              | 10/100-BaseT, RJ45, 32Kbps ~ 16Mbps        |
| Compression          | Dual Stream : H.265+ / H.264+              |
| Working Environment  | -30°~+60°C, <90° Humidity (Non-Condensing) |
| Power                | POE or 12VDC, Max. 7W (IR-On)              |
| Dimension            | 111mm( $\phi$ ) x 82.4mm(H), 300g          |