




## CNC4510-II – 4MP H.265+ WDR IR Dome Camera

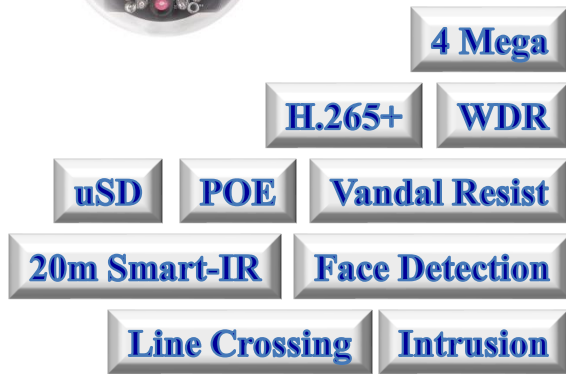

### Features

- **4MP** 2560x1440 @25fps
- **H.265+** compression
- ONVIF compatible
- 4mm Fixed Lens
- **120dB WDR**, 3D-DNR, DSS
- ROI, Mirror, Privacy Mask
- 10/100 Base-T
- Day&Night by Filter Change
- LED Array, 0 Lux up to 20m
- Support uSD card up to 128GB
- 3-Stream
- Smart : Line Crossing, Intrusion & Face Detection
- Vandal Resistant

### SPECIFICATION

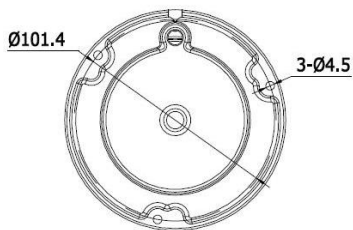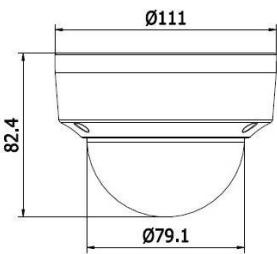

Model	CNC4510-II
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	2560x1440@25fps / 1920x1080@25fps (PAL)
Shuttle	1/3s ~ 1/100,000s
Lens	M12 4mm Fixed Lens
LEDs	850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Minimum Illumination	0 Lux up to 20m
Network	10/100-BaseT, RJ45, 32Kbps ~ 16Mbps
Compression	3-Stream. H.264 / H.264+ / H.265 / H.265+
Working Environment	-30°~+60°C, <90° Humidity (Non-Condensing)
Power	POE or 12VDC, Max. 7W (IR-On)
Dimension	111mm(φ) x 82.4mm(H), 300g