

IP CCTV Cabling Solution


IPS108P-II – 8-Port PoE Switch




Features

- 8x RJ45 PoE Device Port, 10/100-Base-T
- 2x RJ45 Uplink Port, 10/100/1000-Base-T
- Standard : IEEE802.3/u/af/at
- PoE Power : 120W Total
- Surge Protection : 6KV
- 50000h MTBF
- Plug and Play
- 48VDC (Adapter Included)
- CCTV Mode :
 - 1) Device Port only talk to Uplink Port
 - 2) PoE port change to 10Mbps/250m


Connection Diagram

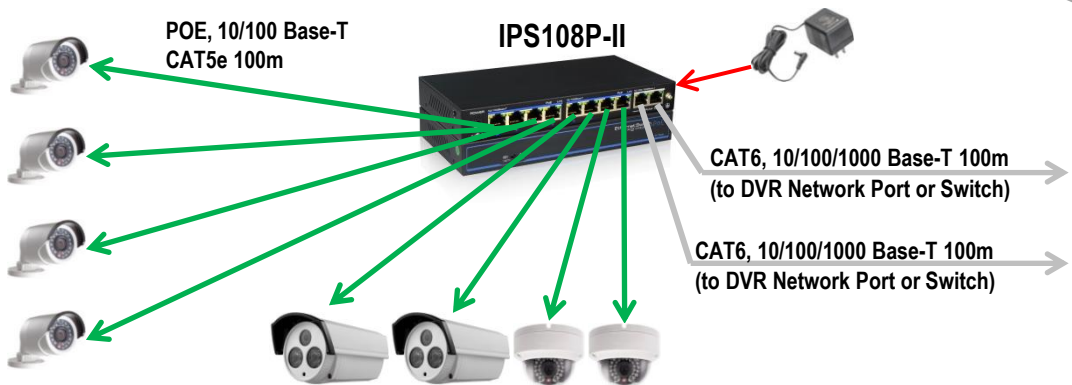

Front board



Back board

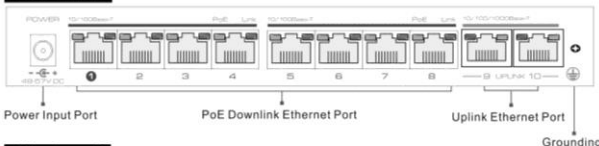

Side board



Specification

- 48~52VDC Input, 120W Max.
- Backbone Bandwidth : 7Gbps
- Data Buffer : 1.5MB
- Network Delay : <20uS
- Operating Environment : -10°~55°C / 0~95% Humidity
- Surge protection : 6kV, Per:IEC6-1.000.4.5
- Galvanized Sheet with Black Epoxy Powder Coating
- Size : 200(W) x102(D) x27(H) mm
- Weight : 500g

* Specification maybe changed without prior notice