

IPS-224-P300 – 24-Port PoE Switch with 2 Uplink




(SFP Fiber Optic Module Not Included)

Features

- 24x RJ45 PoE Device Port, 100 Base-T
- 1x 1000Mbps SFP/UTP Combo Uplink
- 1x 1000Mbps UTP Uplink
- **8.8Gbps** switching, **2.75M** Buffer
- POE Protocol : IEEE802.3, 802.3u/ab/af/at
- POE Power : 200W Total
- Support POE+ (30W/port)
- Surge Protection : 6KV, 30000h MTBF
- CCTV Mode : POE ports only communicate with Uplink port.


Connection Diagram

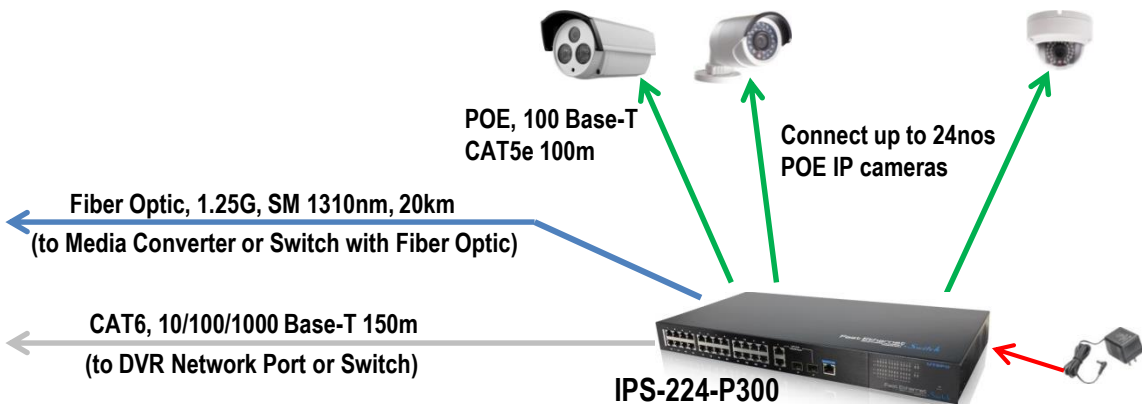


IPS-224-P300

Specification

- 100~240VAC Input, 200W Max.
- Network Standard : IEEE802.3, 802.3u, 802.3ab, Z, X, af/at
- POE Power : 180W Total
- Throughput 6.5Mpps
- Lightning Protection : 6KV, IEC61000-4-5
- Operating Environment : -10°~50°C / 0~95% Humidity
- Aluminum Casing with Black Epoxy Powder Coating
- Size : 442(W) x285(D) x44.5(H) mm
- Weight : 2.7kg

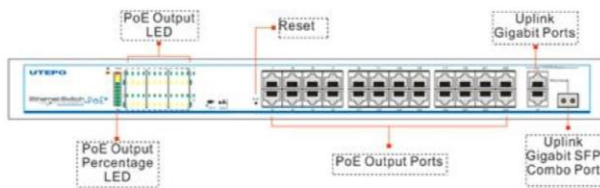

Back board

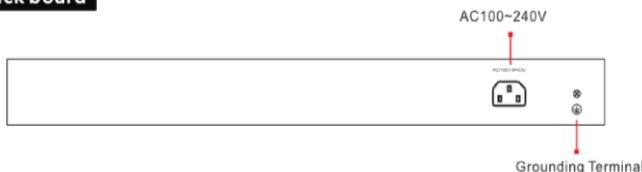

* Specification maybe changed without prior notice