

# IP CCTV Cabling Solution

## IGS408 – 8-Port UTP Full Gigabit Managed Switch





(SFP Fiber Optic Module Not Included)

### Features

- **Full Gigabit L2 Managed Switch**
- **8x UTP** Ports, 1000Mbps
- **4x Uplink : 2 UTP + 2 Combo**, 1000Mbps
- **24Gbps** Switching
- **Web** Management Software
- Standard : IEEE802.3/u/ab/3z
- Surge Protection : 6KV
- 230VAC Input
- **CCTV** mode : Standard port only communicate with Uplink
- **Simple** mode : no managed function

### Design Example

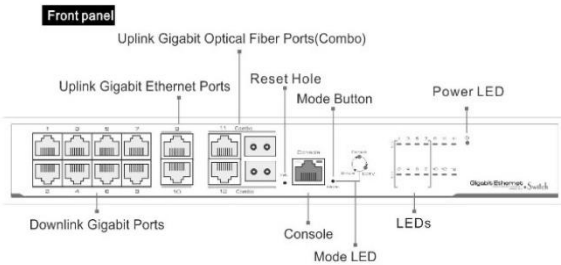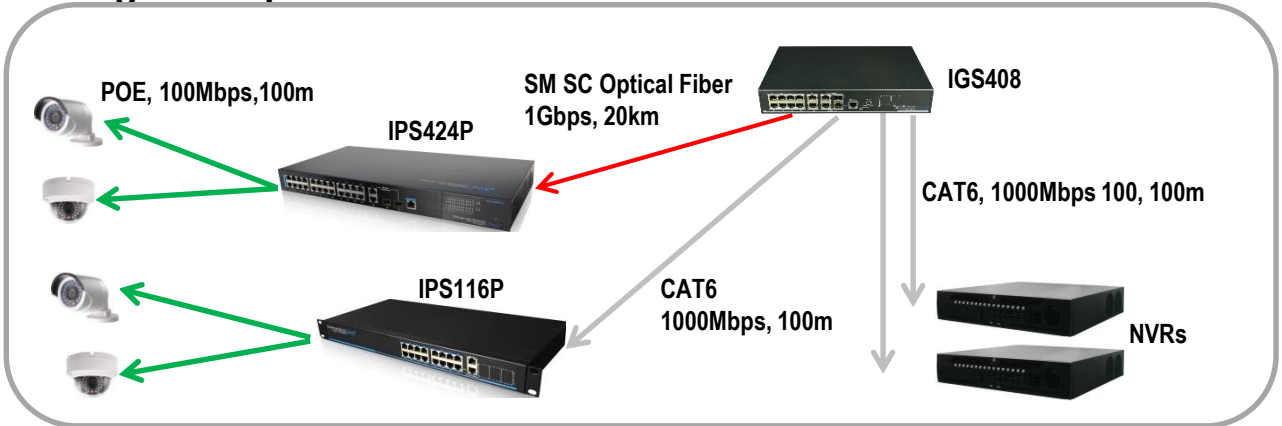

#### Back panel



#### Caution

Device must be connected with lightning protection grounding; Otherwise protection level will reduce; Please use above No.20 wire to connect the grounding terminal.

### Specification

- 230VAC Input
- Switching Capacity : 24Gbps
- Data Buffer : 4Mb
- Network Delay : <20uS
- Operating Environment : -10°~45°C / 0~95% Humidity
- Lightning Protection : 6KV, IEC61000-4-2
- ESD Protection : L3, 1a Contact Discharge
- MTBF : >50000h
- Galvanized Sheet with Black Epoxy Powder Coating
- Size : 280(W) x 180(D) x43(H) mm
- Weight : 1.5kg

\* Specification maybe changed without prior notice