



Hand riveter



- aluminium die cast housing, forged steel handle
- 3-jaw design - CrV steel heat treated

| YATO | Ø (mm) | L (mm) | Box |
|---------|--------------------|--------|------|
| YT-3600 | 2.4; 3.2; 4.0; 4.8 | 280 | 6/24 |

Hand riveter



- aluminium die cast housing, forged steel handle
- 3-jaw design - CrV steel heat treated

| YATO | Ø (mm) | L (mm) | Box |
|----------|--------------------|--------|-------|
| YT-36007 | 2.4; 3.2; 4.0; 4.8 | 250 | 12/24 |

18

Hand riveter



- 3-jaw design, CrMo steel heat treated
- ergonomic grip

| YATO | Ø (mm) | L (mm) | Box |
|---------|-------------------------|--------|-----|
| YT-3609 | 3.2; 4.0; 4.8; 6.0; 6.4 | 330 | 16 |

Hand riveter



| YATO | Ø (mm) | L (mm) | Box |
|----------|--------------------|--------|-------|
| YT-36011 | 2.4; 3.2; 4.0; 4.8 | 253 | 12/36 |


Hand riveter



- aluminium die cast housing, forged steel handle
- 3-jaw design - CrV steel heat treated

| YATO | Ø (mm) | L (mm) | Box |
|----------|---------------------|--------|-----|
| YT-36012 | 2.4; 3.2; 4.0; 4.8; | 200 | 30 |

Lazy tongue riveter



- telescopic design
- length: 250-810mm
- 3 jaws, CrMo steel heat treated
- 5 nosepieces: 3.2, 4.0, 4.8, 6.0, 6.4mm

| YATO | ∅ (mm) | Box |
|----------|-------------------------|-----|
| YT-36060 | 2.4; 3.2; 4.0; 4.8; 6.4 | 20 |

Lazy tongue riveter



- 3-jaw design, crv steel heat treated
- capable of aluminium, steel and stainless steel rivets

| YATO | ∅ (mm) | L (mm) | Box |
|---------|-------------------------|--------|-----|
| YT-3610 | 3.2; 4.0; 4.8; 6.0; 6.4 | 525 | 12 |

Hand nut tool



- capable of aluminium, steel and stainless steel nuts from M3 to M6

| YATO | ∅ (mm) | L (mm) | Box |
|----------|-------------|--------|-----|
| YT-36140 | M3;M4;M5;M6 | 200 | 10 |

Hand nut tool



- capable of aluminium, steel and stainless steel rivet nuts from M3 to M10


| YATO | ∅ (mm) | L (mm) | Box |
|---------|------------------|--------|-----|
| YT-3612 | M5;M6;M8;M10;M12 | 330 | 5 |

Lazy tongue riveter



| YATO | ∅ (mm) | Box |
|----------|------------------------|-----|
| YT-36127 | M3;M4;M5;M6;M8;M10;M12 | 6 |

3 in 1 staple gun




| YATO | staplers size (mm) | Weight | Box |
|----------|--------------------|--------|------|
| YT-70020 | 11.3x4.0-14.0x1.2 | 940 | 6/24 |

Lazy tongue riveter




| YATO | size/rozmiar | Box |
|----------|--------------|---------|
| YT-36451 | M 3 | 125/500 |
| YT-36452 | M 4 | 100/400 |
| YT-36453 | M 5 | 75/300 |
| YT-36454 | M 6 | 50/200 |

Staple gun



| YATO | Weight | Box |
|---------|--------|-------|
| YT-7000 | 680 | 12/24 |

Staple gun




| YATO | Weight | Box |
|---------|--------|-------|
| YT-7001 | 810 | 12/24 |

Staple gun



| | | |
|-------------|-----|------|
| YATO | | |
| YT-7003 | 920 | 6/24 |

Staples



YT-7000
YT-7001
YT-7003
YT-7004
YT-7005


| YATO | L(mm) | |
|-------------|-------|----------|
| YT-7022 | 6 | 1/50/200 |
| YT-7023 | 8 | 1/50/200 |
| YT-7024 | 10 | 1/50/100 |
| YT-7025 | 12 | 1/50/100 |
| YT-7026 | 14 | 1/50/100 |

Staple remover




| | | |
|-------------|-----|--------|
| YATO | | |
| YT-7011 | 110 | 25/100 |

Staple gun



| | | | |
|-------------|--------------------|-----|------|
| YATO | staplers size (mm) | | |
| YT-7005 | 10.6x6.0-16.0x1.2 | 940 | 6/24 |

Nails for staple gun



| YATO | L (mm) | PCS packing | |
|-------------|--------|----------------|--------|
| YT-7032 | 10 | 1000 | 50/200 |
| YT-7033 | 12 | 1000 | 50/200 |
| YT-7034 | 14 | 1000 | 50/200 |

Butane torch




- electronic ignition system
- gas capacity: 60ml
- work life: 200mins
- aluminium body with ribbed grip

| | | |
|-------------|-----|--------|
| YATO | | |
| YT-6700 | 450 | 3/6/24 |


18

2 in 1 staple gun



| | | | |
|-------------|--------------------|-----|------|
| YATO | staplers size (mm) | | |
| YT-70021 | 11.3x6.0-14x1.2 | 940 | 6/24 |

Hammer tackler



| | | |
|-------------|-----|-------|
| YATO | | |
| YT-7004 | 960 | 10/20 |

Pneumatic riveting machine



L₁ = 83.6 ± 1.9 dB
L_{1A} = 97.4 ± 2.8 dB
sh = 0.66 ± 0.21 m/s²

| YATO | Ø(mm) | L (mm) | F (kg) | F (N) | |
|-------------|-------------------------|--------|--------|-------|----|
| YT-36171 | 2.4; 3.2; 4.0; 4.8; 5.0 | 18 | 1060 | 10400 | 10 |

Caulking gun

300 ml 225mm



| | | | |
|-------------|-------|-----|----|
| YATO | L(mm) | | |
| YT-6750 | 225 | 400 | 40 |

Caulking gun

300 ml 225 mm



- 9", three rod type, strong force

| | | | |
|-------------|-------|-----|------|
| YATO | L(mm) | | |
| YT-6753 | 225 | 960 | 6/12 |

Butane soldering tool

1300°C 210-400°C 20ml 25-80 W 120 min



- manual start, equivalent to 25-80W
- gas capacity: 20ml
- work life: 120mins

| | | |
|-------------|-----|-------|
| YATO | | |
| YT-6705 | 110 | 12/72 |

Caulking gun

300 ml 225 mm



- 9", cradle type, smooth rod, aluminium handle
- 360° rotatable body

| | | | |
|-------------|-------|-----|-------|
| YATO | L(mm) | | |
| YT-6751 | 225 | 530 | 10/20 |

Caulking gun

300 ml 225 mm



- 9", aluminium alloy tube
- 360° rotatable body

| | | | |
|-------------|-------|-----|-------|
| YATO | L(mm) | | |
| YT-6754 | 225 | 610 | 10/20 |

Butane soldering tool

PIEZO ELECTRIC 1300°C 200-450°C 38 ml 30-125 W 200 min




- automatic ignition, equivalent to 30-125W
- manual start, equivalent to 25-80W
- gas capacity: 38ml
- work life: 200mins

| | | |
|-------------|-----|-------|
| YATO | | |
| YT-6706 | 260 | 12/48 |

Caulking gun

300 ml 225 mm



- 9", cradle type, smooth rod, aluminium handle
- 360° rotatable body

| | | | |
|-------------|-------|-----|-------|
| YATO | L(mm) | | |
| YT-6752 | 225 | 510 | 10/20 |

Foam gun

PTFE COATED



- body: aluminium alloy, nickel plated
- adapter: copper, PTFE coated
- pin: stainless steel, PTFE coated

| | |
|-------------|-------|
| YATO | |
| YT-6745 | 10/20 |

Double edge trimmer

13-25 mm ONE SIDE CUTTING BOTH SIDES CUTTING SK5



| | | |
|-------------|-----|------|
| YATO | | |
| YT-5710 | 100 | 6/48 |

Hand saw for wood



| YATO | L (mm) | |
|---------|--------|-------|
| YT-3101 | 400 | 12/48 |
| YT-3102 | 450 | 10/40 |
| YT-3103 | 500 | 10/40 |

Compass saw



| YATO | L (mm) | |
|---------|--------|-------|
| YT-3133 | 300 | 12/60 |

Bow saw



• PVC handle with TPR grip, foam sleeve on frame

| YATO | L (mm) | |
|---------|--------|-------|
| YT-3201 | 450 | 12/24 |
| YT-3202 | 530 | 12/24 |
| YT-3203 | 610 | 12/24 |
| YT-3204 | 760 | 12/24 |
| YT-3206 | 910 | 12/24 |

Back saw



| YATO | L (mm) | |
|---------|--------|-------|
| YT-3130 | 300 | 12/60 |

Wallboard saw



| YATO | L (mm) | |
|---------|--------|-------|
| YT-3134 | 150 | 12/60 |

Blade for dry wood



| YATO | L (mm) | |
|---------|--------|--------|
| YT-3220 | 300 | 50/200 |
| YT-3221 | 450 | 50/200 |
| YT-3222 | 530 | 50/200 |
| YT-3223 | 610 | 50/200 |
| YT-3224 | 760 | 50/200 |
| YT-3225 | 910 | 50/200 |

Plastic mitre box with dovetail saw



| YATO | L (mm) | |
|---------|--------|----|
| YT-3150 | 350 | 10 |

Bow saw



| YATO | L (mm) | |
|---------|--------|-------|
| YT-3200 | 300 | 12/24 |

Blade for wet wood



| YATO | L (mm) | |
|---------|--------|--------|
| YT-3230 | 300 | 50/200 |
| YT-3231 | 450 | 50/200 |
| YT-3232 | 530 | 50/200 |
| YT-3233 | 610 | 50/200 |
| YT-3234 | 760 | 50/200 |
| YT-3235 | 910 | 50/200 |

Router bit set



| Router bit parameter | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | |
|--------------------------|--------|------|--------|------|--------|------|--------|-------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|---|--------|---|--------|---|--------|---|--------|---|
| Shank diameter (mm) | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Length (mm) | 43.0 | 38.0 | 38.0 | 50.5 | 42.0 | 43.5 | 51.5 | 49.5 | 51.5 | 58.0 | 58.5 | 56.5 | 52.0 | 58 | 53.5 | 66.0 | 53.0 | 65.0 | | | | | | | | | | |
| Router bit diameter (mm) | 6.35 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 14.3 | 3.175 | 6.35 | 9.5 | 12.7 | 12.7 | 19.0 | 6.35 | 9.5 | 9.5 | 12.7 | 12.7 | | | | | | | | | | |
| Cutting edge length (mm) | 6.0 | 9.5 | 9.5 | 18.0 | 12.7 | 13.0 | 12.3 | 13.0 | 20.0 | 24.5 | 20.3 | 25.0 | 20.4 | 19.5 | 15.0 | 26.0 | 15 | 25.0 | | | | | | | | | | |
| Curvature radius (mm) | 3.175 | 6.35 | - | 6.35 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | | | | | | | | | |
| Beating diameter (mm) | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 9.5 | 9.5 | 12.7 | 12.7 | | | | | | | | | |
| Angle [°] | - | - | 45 | - | - | 10 | 14 | - | - | - | - | - | - | - | - | - | - | - | | | | | | | | | | |

| Router bit parameter | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | | [Icon] | |
|--------------------------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|---|--------|---|--------|---|--------|---|--------|---|--------|---|
| Shank diameter (mm) | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 6 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | - |
| Length (mm) | 65.5 | 55.0 | 51.0 | 55.0 | 50.0 | 52.5 | 54.0 | 55.5 | 60.0 | 60.0 | 56.0 | 60.0 | 52.5 | 58.0 | 53.5 | 57.5 | 61.0 | - | | | | | | | | | | |
| Router bit diameter (mm) | 19.0 | 30.0 | 26.0 | 32.0 | 32.0 | 32.0 | 32.0 | 32.0 | 32.0 | 36.0 | 32.0 | 38.0 | 26.0 | 38.0 | 26.0 | 32.0 | 38.0 | - | | | | | | | | | | |
| Cutting edge length (mm) | 26.0 | 14.0 | 9.7 | 13.3 | 6.35 | 8.0 | 9.5 | 15.0 | 18.5 | 20.0 | 16.0 | 19.0 | 12.5 | 17.8 | 11.5 | 16.5 | 20.8 | - | | | | | | | | | | |
| Curvature radius (mm) | - | - | 6.35 | 9.5 | - | - | - | 8.0 | 4.76 | 12.7 | 4.76 | 6.35 | 3.175 | 6.35 | 6.35 | 9.5 | 12.7 | - | | | | | | | | | | |
| Beating diameter (mm) | 19.0 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 9.5 | 12.7 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 9.5 | 12.7 | 12.7 | - | | | | | | | | | | |
| Angle [°] | - | 45 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | | | | | | | | | |

| | | |
|-------------|--|----|
| YATO | | |
| YT-6803 | | 10 |

Aluminium level



- aluminium, thickness 1.5mm
- accuracy 0.057°=1mm/m

| YATO | L (mm) | |
|---------|--------|-------|
| YT-3001 | 400 | 20/60 |
| YT-3002 | 600 | 20/60 |
| YT-3003 | 800 | 20/60 |
| YT-3004 | 1000 | 20/60 |
| YT-3005 | 1200 | 20/60 |

Aluminium level



- aluminium, thickness 1.5mm
- accuracy 0.057°=1mm/m

| YATO | L (mm) | |
|---------|--------|-------|
| YT-3022 | 600 | 20/60 |
| YT-3023 | 800 | 20/60 |
| YT-3024 | 1000 | 30 |
| YT-3025 | 1200 | 30 |
| YT-3026 | 1500 | 30 |



Wood carving knife set



| | | |
|-------------|--|------|
| YATO | | |
| YT-75140 | | 6/48 |

Aluminium level




- aluminium, thickness 1.5mm
- accuracy 0.057°=1mm/m

| YATO | L (mm) | |
|----------|--------|-------|
| YT-30061 | 600 | 10/40 |
| YT-30062 | 800 | 10/30 |
| YT-30063 | 1000 | 10/20 |
| YT-30064 | 1200 | 10/20 |



Router bit set



| Router bit parameter | | | | | | | | | | | | |
|--------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Shank diameter (mm) | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Length (mm) | 42.0 | 47.0 | 47.0 | 43.5 | 50.0 | 51.5 | 51.0 | 52.0 | 58.0 | 51.5 | 58.0 | 66.5 |
| Router bit diameter (mm) | 12.7 | 12.7 | 9.5 | 12.7 | 12.7 | 9.5 | 12.7 | 16.0 | 6.35 | 6.35 | 9.5 | 12.7 |
| Cutting edge length (mm) | 12.7 | 14.8 | 11.6 | 13.0 | 12.5 | 20.0 | 20.0 | 9.5 | 19.5 | 20.0 | 24.5 | 25.0 |
| Curvature radius (mm) | - | - | - | - | - | 4.75 | 6.35 | - | - | - | - | - |
| Bearing diameter (mm) | - | - | - | - | - | - | - | 12.7 | - | - | - | - |
| Angle (°) | - | 15 | 10 | - | 45 | - | - | 15 | - | - | - | - |

| Router bit parameter | | | | | | | | | | | | |
|--------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Shank diameter (mm) | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Length (mm) | 52.0 | 65.0 | 51.0 | 51.5 | 53.5 | 57.5 | 50.5 | 53.5 | 52.0 | 55.0 | 50.0 | 54.0 |
| Router bit diameter (mm) | 19.0 | 12.7 | 19.0 | 22.0 | 26.0 | 32.0 | 22.0 | 29.5 | 27.0 | 30.0 | 32.0 | 32.0 |
| Cutting edge length (mm) | 20.4 | 25.0 | 9.5 | 10.0 | 11.5 | 16.5 | 9.72 | 13.5 | 12.3 | 14.0 | 6.35 | 12.7 |
| Curvature radius (mm) | - | - | 3.2 | 4.76 | 6.35 | 9.5 | 6.35 | 9.5 | 4.0 | - | - | - |
| Bearing diameter (mm) | - | 12.7 | - | 12.7 | 12.7 | 12.7 | 9.5 | 9.5 | 9.5 | 12.7 | 12.7 | 12.7 |
| Angle (°) | - | - | - | - | - | - | - | - | - | - | 45 | - |

YATO **YT-6801** 10

Carpenter's pencil

144 **HB**



YATO **L (mm)** **W (mm)**
YT-6927 245 15 144/1152



YATO **L (mm)** **W (mm)**
YT-6925 245 15 144/1152

YATO **L (mm)** **W (mm)**
YT-6926 245 12 144/1152

18

Pliers for hollow expansion bolts

10



NEW

- 5x ∅ 7 mm (32 mm)
- 5x ∅ 9 mm (37 mm)
- ∅ 4 mm (40 mm)
- ∅ 5 mm (44 mm)


YATO **YT-51450** 6/24

Pliers for hollow expansion bolts

60



NEW

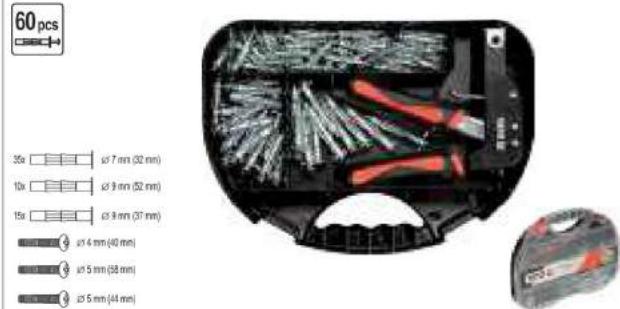

- 35x ∅ 7 mm (32 mm)
- 10x ∅ 9 mm (37 mm)
- 15x ∅ 9 mm (37 mm)
- ∅ 4 mm (40 mm)
- ∅ 5 mm (44 mm)
- ∅ 5 mm (44 mm)

YATO **YT-51451** 3/12

177