



FD8155H

Fixed Dome Network Camera

1.3MP · WDR Pro II · 30M IR · Smart IR · 3DNR · Smart Focus System · Low Light · Corridor View

VIVOTEK FD8155H is a professional indoor network dome camera offering up to 60 fps @ 1.3-Megapixel resolution with superb image quality.

Featuring the new improved Wide Dynamic Range Technology WDR Pro II, this camera provides high visibility even in extremely dark and light environments with 4 shutter capture methods. Combined with 3D Noise Reduction Technology, which enables the FD8155H to capture clear, polished video under low-light conditions and reduce bandwidth from sensor noise, users can enjoy superb image detail in all lighting conditions.

Additionally, as a professional day/night camera, FD8155H adopts Smart IR technology which prevents overexposure and provides noise reduction by instantaneously adjusting IR lighting intensity to suit changes in ambient light.

To provide top-notch image quality, the FD8155H also comes with a P-iris lens, which controls the iris with extreme precision via its built-in stepper motor. The iris opening is kept at an optimal level at all times, resulting in superior image sharpness and depth of field. Furthermore, because installation and adjustment of a megapixel network camera can be difficult due to the level of image detail, the FD8155H is equipped with VIVOTEK's Smart Focus System to allow remote focus and zoom adjustment.

Key Features

- 1.3-Megapixel CMOS Sensor
- 30 fps @ 1280x1024
- 60 fps @ 1280x1024 (one-stream mode only)
- Motorized, P-iris Lens
- Removable IR-cut Filter for Day & Night Function
- Built-in IR Illuminators, Effective up to 30 Meters
- Smart IR Technology to Avoid Overexposure
- 3D Noise Reduction for Low-light Conditions
- WDR Pro II to Provide Extreme Visibility in Extremely Bright and Dark Environments
- Smart Focus System for Remote and Precise Focus Adjustment
- Two-way Audio
- Supreme Night Visibility
- Video Rotation for Corridor View
- EIS (Electronic Image Stabilization) to Control Image Stability



With WDR Pro II

Without WDR Pro II



Bank




Airport



With SNV

Without SNV



Low Light




Office

Technical Specifications

Model	FD8155H
System Information	
CPU	Multimedia SoC (System-on-Chip)
Flash	256MB
RAM	384MB
Camera Features	
Image Sensor	1/3" Progressive CMOS
Maximum Resolution	1280x1024 (1.3MP)
Lens Type	Vari-focal, Remote Focus
Focal Length	f = 3 ~ 10 mm
Aperture	F1.3 ~ F2.5
Auto-iris	P-iris/DC-iris (Reserved)
Field of View	30° ~ 95° (Horizontal) 24° ~ 75° (Vertical) 39° ~ 123° (Diagonal)
Shutter Time	1/5 sec. to 1/10000 sec.
WDR Technology	WDR Pro II
Day/Night	Removable IR-cut filter for day & night function Smart IR Technology to avoid overexposure (WDR on)
Minimum Illumination	0.05 Lux @ F1.3 (Color) 0.001 Lux @ F1.3 (B/W)
Pan/tilt/zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)
IR Illuminators	Built-in IR illuminators, effective up to 30 meters IR LED*4, with Smart IR Technology
On-board Storage	MicroSD/SDHC/SDXC card slot
Video	
Compression	H.264, MJPEG
Maximum Frame Rate	30 fps @ 1280x1024 60 fps @ 1280x1024 (One-stream mode only) In both compression modes
Maximum Streams	2 simultaneous streams
S/N Ratio	64dB
Dynamic Range	Up to 140dB
Video Streaming	Adjustable resolution, quality and bitrate
Image Settings	Time stamp, text overlay, flip & mirror Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks, scheduled profile settings, 3D noise reduction, seamless recording, video rotation, EIS
Audio	
Audio Capability	Two-way audio (full duplex)
Compression	AAC, G.711, G.726
Interface	External microphone input Audio output
Network	
Users	Live viewing for up to 10 clients
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP
Interface	10 Base-T/100 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.

ONVIF	Supported, specification available at www.onvif.org
Intelligent Video	
Video Motion Detection	Triple-window video motion detection
Alarm and Event	
Alarm Triggers	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection
Alarm Events	Event notification using digital output, HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server
General	
Smart Focus System	Remote focus
Connectors	RJ-45 for Network/PoE connection Audio input/output TV output AC 24V power input DC 12V power input Digital input*1 Digital output*1
LED Indicator	System power and status indicator
Power Input	DC12V/AC24V IEEE 802.3af PoE
Power Consumption	DC 12V: Max. 8 W AC 24V: Max. 8.8 W PoE: Max. 10.6 W
Dimensions	Ø: 157 mm x 109 mm
Weight	Net: 758g
Safety Certifications	CE, LVD, FCC Class B, VCCI, C-Tick, UL
Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F~ 122°F)
Warranty	36 months
System Requirements	
Operating System	Microsoft Windows 7/Vista/XP/2000
Web Browser	Mozilla Firefox 7~10 (streaming only) Internet Explorer 7/8/9/10/11
Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
Included Accessories	
CD	User's manual, quick installation guide, Installation Wizard 2, ST7501 32-channel recording software
Others	Quick installation guide, warranty card, alignment sticker, L-type hex key wrench, screws, hex nut, AV cable, power cable

Dimensions

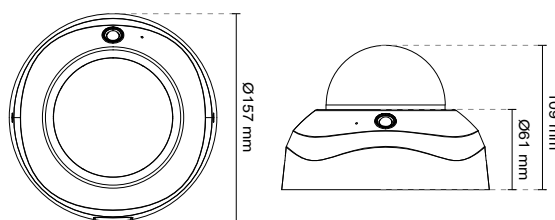

Compatible Accessories

Mounting Kits



AM-215
L Shape Bracket



AM-516
Adaptor Ring



AM-520
Mounting Adaptor



AM-51A
Mounting Adapter

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Distributed by:



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho,
New Taipei City, 235, Taiwan, R.O.C.
T: +886-2-82455282 F: +886-2-82455532
E: sales@vivotek.com

VIVOTEK USA
2050 Ringwood Avenue,
San Jose, CA 95131
T: 408-773-8686 F: 408-773-8298
E: salesusa@vivotek.com

VIVOTEK Europe
Randstad 22-133, 1316BW Almere,
The Netherlands
T: +31(0)36-5298-434
E: sales europe@vivotek.com

Ver. 10