

KENNEDY **Hose Clamp**
QUALITY INDUSTRIAL TOOLING

Long rounded jaws with smooth section. For pinching off hoses without serration and gripping small sections of pipes. Invaluable aid for brake repairs on cars.



Dia. Capacity	Overall Length	Order Code
30mm	235mm (9½")	KEN-558 -8180K

Self-Levelling Grip Wrenches

The two knurled swivel pads ensure fully flat contact with the workpiece at the clamping point. Suitable for clamping tapered surfaces without slippage. Narrow jaw profile allows use in areas of confined access and where C-clamps cannot reach.



Capacity (mm)	Overall Length	Order Code
0 - 45	235mm (9½")	KEN-558 -8460K
0 - 100	300mm (12")	-8480K

Flat & Convex Grip Wrench

The convex jaw shape allows clearance around small obstacles and the broad jaw profile ensures that flat workpieces are clamped securely.



Capacity (mm)	Overall Length	Order Code
0 - 100	300mm (12")	KEN-558 -8420K

Grip Holder

Can be used as a normal C-type clamp or converts most 250mm and 300mm grip wrenches into a versatile portable vice. Steel frame with butterfly adjustment screw and swivel clamping pad.

N.B. Supplied singly. Grip wrench not included.



Max. Opening	Overall Length	Order Code
63mm	110mm (4¼")	KEN-558 -8020K

Sheet Metal Clamp

The wide jaws distribute the clamping force evenly to prevent damaging the workpiece being handled.



Quick Release Lever

Overall Length	Weight each	Order Code
180mm (7")	470g	KEN-558 -8080K

Welder's Clamp

Deep throated, suitable for clamping sheet metal, body panels and sills, with split jaws to allow maximum visibility and access to the working area when welding.



Quick Release Lever

Overall Length	Weight each	Order Code
280mm (11")	790g	KEN-558 -8000K

SENATOR **Sheet Metal Clamp**
QUALITY TOOLING

The wide jaws distribute the clamping force evenly to prevent damaging the workpiece being handled.



Quick Release Lever

Overall length	Weight each	Order Code
255mm (10")	700g	SEN-558 -7300K

Welder's Clamp

Deep throated, suitable for clamping sheet metal, body panels and sills, with split jaws to allow maximum visibility and access to the working area when welding.



Quick Release Lever

Overall length	Weight each	Order Code
205mm (8")	680g	SEN-558 -7500K

KENNEDY Sill Clamps

The small gripping jaws allow close-up working. Deep throat enables access around bulky and awkward shapes such as door sills or holding together sheet metal, body panels when welding, gluing or marking off.



Quick Release Lever

Overall length	Weight each	Order Code
305mm (12")	1.20kg	KEN-558

Locking C-Clamps

Wide and deep jaw profile, clears obstacles to firmly clamp sections that a normal grip wrench cannot.



Quick Release Lever

Capacity (mm)	Overall Length	Order Code
0 - 60	165mm (6½")	-9270K
0 - 260	460mm (18")	-9290K
0 - 400	600mm (24")	-9300K

Locking C-Clamps - Swivel Pads

Wide and deep jaw profile, clears obstacles to firmly clamp sections that a normal grip wrench cannot. With swivel contact pads to allow tapered surfaces to be clamped.



Quick Release Lever

Capacity (mm)	Overall Length	Order Code
0 - 50	165mm (6½")	-9330K
0 - 80	320mm (13")	-9340K
0 - 125	360mm (14½")	-8670K
0 - 240	470mm (19")	-9350K
0 - 400	630mm (25")	-9360K

PLIERS & GRIPS

GROUP
558

Spindle Clamps

Fine spindle clamping adjustment enables accurate clamping. Swivel joint clamping points allow tapered surfaces to be securely clamped. Copper plated spindle and clamping points ensure weld splatter will not adhere.



Quick Release Lever

Capacity (mm)	Overall length	Order Code
0 - 25	300mm (12")	-8720K
0 - 100	330mm (13")	-8740K

Table C-Clamp

Five holes in base to allow fixture to work surface as a permanent clamp. Swivel foot to clamp tapered workpieces.

Quick Release Lever



Capacity (mm)	Overall length	Order Code
0 - 100	300mm (12")	-8160K

SENATOR Locking C-Clamps

Wide and deep jaw profile, clear obstacles to firmly clamp sections that a normal grip wrench cannot.



Quick Release Lever

Overall length	Weight each	Order Code
150mm (6")	185g	-7360K
280mm (11")	800g	-7410K

Adjustable Bar Clamp

For parallel clamping of large and irregular shaped objects. Quick action with locking screw.



Quick Release Lever

Size	Weight each	Order Code
250 x 73 x 165mm	1.20kg	-7700K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



KENNEDY Axial Grip
Wrenches

For auto body repair and steel fabrication. Chrome steel body with narrow profile jaws for confined areas. Straight line jaw motion allows clamping through holes. Push button release for one-handed clamp releasing. No provisional (or track) welding required to hold auto body parts for assembly.

Flanged Lap Joint Clamp -J-Type
Clamps two flanged adjacent joints.
Jaw width: 18mm.
Throat depth: 7mm.



Capacity (mm)	Length (mm)	Weight each	Order Code
0 - 15	210mm (8½")	470g	KEN-558 -9240K

Flanged, Lap & Adjacent Joint Clamp - JJ-Type
Clamps two flanged and adjacent joints.
Jaw width: 45mm.
Throat depth: 25mm.



Capacity (mm)	Overall Length	Weight each	Order Code
0 - 10	210mm (8½")	550g	KEN-558 -9210K

Lap & Spot Weld Joint Clamp - W-Type
The 'W' shaped jaw allows four consecutive spot welds without moving the tool.
Jaw width: 57mm.
Throat depth: 36mm.



Capacity (mm)	Overall Length	Weight each	Order Code
0 - 12	195mm (7¾")	542g	KEN-558 -9220K

Lap Joint Clamp - L-Type
Clamps two lap joints.
Jaw width: 18mm.



Capacity (mm)	Overall Length	Weight each	Order Code
0 - 18	195mm (7¾")	410g	KEN-558 -9200K

Angle Clamp -T-Type
Clamps two sheets of the same thickness at 90° to one another.
Jaw width: 50mm.
Throat depth: 15mm.



Capacity (mm)	Overall Length	Weight each	Order Code
0 - 12	200mm (8")	495g	KEN-558 -9230K


SENATOR Multi-Function
QUALITY TOOLING Plier Tools

A range of folding pliers with 'pen-knife' style blades. Featuring knives, can/bottle openers, metal/wood files (single and double cut), screwdrivers, chisels, saw blades, rules, wire benders, fish scalers, hook removers etc. Ideal for maintenance engineers, DIY enthusiasts, fishermen and hobbyists. Manufactured from the finest quality steel.

MTM610: 6 Blade - 10 Function

All stainless steel construction, spring-loaded pliers, easy to open blades. Folds down to a compact 20 x 70mm.

Plier overall dimensions: 105 x 320mm.

Functions:

35mm clipt point mini knife blade,
 5 x 25mm flat screwdriver,
 bottle opener with 2mm flat driver,
 flat single/double cut file with hook remover,
 35mm reamer, tin opener, serrated jaw pliers,
 wire cutting jaws, spring return opener, key ring.

**6 Blades
10 Functions**

Model Number	Order Code
MTM610	SEN-558 -5010K

MTS1016: 10 Blade - 16 Function

All stainless steel construction, easy to open blades. Folds down to a compact 30 x 115mm.

Plier overall dimensions: 55 x 180mm.

Functions:

55mm scalloped edge knife with 8mm chisel blade,
 60mm wood cutting blade with hook remover,
 65mm clipt point super sharp knife blade,
 5 x 22mm flat screwdriver,
 7mm flat screwdriver with bottle opener,
 2 x 25mm flat screwdriver,
 70mm single/double cut file,
 awl/punch tool,
 No.4 x 4mm crosspoint screwdriver,
 tin opener, long nosed pliers with serrated jaws,
 bypass action wire cutters.

**10 Blades
16 Functions**

Model Number	Order Code
MTS1016	SEN-558 -5040K

MTS1015: 10 Blade - 15 Function

All stainless steel construction, easy to open blades. Folds down to a compact 25 x 100mm.

Plier overall dimensions: 50 x 163mm.

Functions:

60mm super sharp knife blade,
 60mm scalloped edge knife,
 5 x 22mm screwdriver blade,
 7 x 25mm screwdriver blade,
 2 x 20mm flat screwdriver,
 awl/punch tool,
 65mm single/double cut file,
 No.0 x 25mm crosspoint screwdriver,
 inch graduated rule with fish descaler and hook remover,
 tin opener, long nose pliers with flat and curved serrated jaws,
 bypass action wire cutters.

**10 Blades
15 Functions**

Model Number	Order Code
MTS1015	SEN-558 -5030K


HAND TOOLS
PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY Hand
Stamps

Drawn carbon steel nickel-plated hand stamps with chamfered edges to prevent accidental damage to workpiece.

Positive Indent (Standard)

Set Description	No. of Pieces	Font Size (mm)	Overall Length	Weight each	Order Code KEN-560
Letter A - Z Plus &	27	1.5	73	1000g	-6400K
		2.5	73	1000g	-6410K
		3.0	73	1000g	-6420K
		4.0	73	1000g	-6430K
		5.0	78	1600g	-6440K
		6.0	78	1600g	-6450K
		8.0	80	3800g	-6460K
		10.0	92	4000g	-6470K
		12.0	92	4000g	-6480K
Figure 0 - 9	9	1.5	71	330g	-6000K
		2.5	71	330g	-6010K
		3.0	71	340g	-6020K
		4.0	71	340g	-6030K
		5.0	75	540g	-6040K
		6.0	75	530g	-6050K
		8.0	83	1000g	-6060K
		10.0	90	1400g	-6070K
		12.0	90	1400g	-6080K

Positive Indent Low Stress Punches

For use on brittle material to avoid damage.



Set Description	No. of Pieces	Font Size (mm)	Overall Length	Weight each	Order Code KEN-560
Letter A - Z Plus &	27	3.0	73	1000g	-7300K
		6.0	78	1600g	-7600K
Figure 0 - 9	9	3.0	71	330g	-5300K
		6.0	75	550g	-5600K


SENATOR Letter &
Number Stamps

Standard quality, with strength up to 800N/mm². Hardness at the engraving: 58 - 60HRC. Type of characters according to **DIN 1451**.

Set Description	Number of Pieces	Font Size	Weight each	Order Code SEN-560
Numbers 0 - 9	9	3.0	550g	-1300K
		4.0	950g	-1400K
		5.0	1350g	-1500K
		6.0	1350g	-1600K
		8.0	200g	-1800K
		10.0	200g	-2100K
Letters A - Z	27	3.0	550g	-3300K
		4.0	950g	-3400K
		5.0	1350g	-3500K
		6.0	1350g	-3600K
		8.0	200g	-3800K
		10.0	200g	-4100K


KENNEDY Power Punch
Kit

Provides smooth piercing with minimum effort. For use on steel, aluminium, plastic and leather. Adjustable depth gauge. Suitable for materials up to 14 gauge. Die and punch sizes: 2.38, 3.18, 3.97, 4.76, 5.56, 6.35, and 7.14mm.

Model Number	Throat Capacity	Weight each	Order Code KEN-560
PPK2812	45mm (1 ³ / ₄ "	1.60kg	-7800K

Replacement Dies

Size (mm)	Weight each	Order Code KEN-560
2.38 (3/32")	4g	-7910K
3.18 (1/8")	4g	-7920K
3.97 (5/32")	4g	-7930K
4.76 (3/16")	4g	-7940K
5.56 (7/32")	4g	-7950K
6.35 (1/4")	4g	-7960K
7.14 (9/32")	4g	-7970K

Replacement Punches

Size (mm)	Weight each	Order Code KEN-560
2.38 (3/32")	8g	-7980K
3.18 (1/8")	8g	-7990K
3.97 (5/32")	8g	-8000K
4.76 (3/16")	8g	-8010K
5.56 (7/32")	8g	-8020K
6.35 (1/4")	8g	-8030K
7.14 (9/32")	8g	-8040K





6 Wheel Number Punch

Ideal for rapid precise marking of six figure numbers in one impact. Manufactured from nickel-plated carbon steel, knurled handle for extra grip.



Fount Size (mm)	Overall Length	Order Code
3.0	130	-9000K


Fount Set

Precision manufactured carbon steel alphabetical and numeric-marking stamps with nickel-plated finish. For producing between eight and ten clean uniform impressions in one impact, suitable for all batch and general-purpose marking. Each set contents tweezers to allow easy handling of the individual fount blocks. The knurled grip fount holder has an impact resistant plastic hand shield to redirect the force of miss-hits safely away from your hand preventing injury. Hexagon wrench for operating the fount retaining screw and 100 characters and spaces according to the most common use. See diagram for exact character content. Supplied complete in a foam-lined plastic carry case.

Individual Nickel-plated Carbon Steel Founts

For use with holder shown below. 3mm character height.

Character	Order Code
KEN-560	
Alphabetical	
A	-8200K
B	-8210K
C	-8220K
D	-8230K
E	-8240K
F	-8250K
G	-8260K
H	-8270K
I	-8280K
J	-8290K
K	-8300K
L	-8310K
M	-8320K
N	-8330K
O	-8340K
P	-8350K
Q	-8360K
R	-8370K
S	-8380K
T	-8390K
U	-8400K
V	-8410K
W	-8420K
X	-8430K
Y	-8440K
Z	-8450K
Space	-8500K
Numeric	
0	-8100K
1	-8110K
2	-8120K
3	-8130K
4	-8140K
5	-8150K
6	-8160K
7	-8170K
8	-8180K
9	-8190K

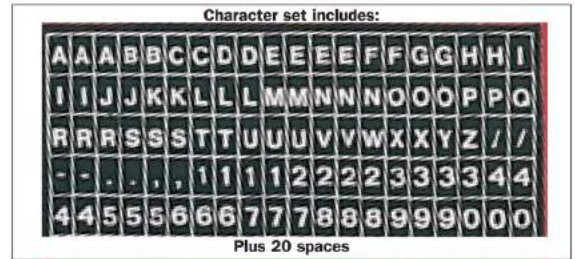

Set

No. of Pieces	Fount Size (mm)	Order Code
100	3.0	-9300K

Individual Holder

Overall Length	Weight each	Order Code
125mm	600g	-9500K

KENNEDY Stencil Sets

Stencils manufactured from hard-wearing quality steel with precision cut letters for a clean sharp image. Suitable for use with all paints and marking compounds for marking packing cases with shipping details, loading/work bay walls for identification, car park spaces and countless other applications.

10-Piece Numbered Sets 0 - 9



Character Height	Weight each	Order Code
40mm	80g	-0400K
50mm	110g	-0500K
60mm	130g	-0600K
70mm	170g	-0700K
80mm	200g	-0800K
100mm	260g	-1000K
150mm	1000g	-1500K
200mm	1400g	-2000K

26-Piece Letter Sets A - Z



Character Height	Weight each	Order Code
40mm	170g	-2400K
50mm	250g	-2500K
60mm	300g	-2600K
70mm	350g	-2700K
80mm	440g	-2800K
100mm	600g	-3100K
150mm	2400g	-3150K
200mm	4500g	-3200K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

GROUP 569 RIVETING TOOLS

KENNEDY PROFESSIONAL Heavy Duty Riveter

Steel construction with unique mechanism that reduces operator effort by 40%. Ergonomically designed PVC handle for extra comfort and grip. Quick change nozzles are stored in the handle. One handed operation.

Complete with 4 nozzles for rivet sizes: 2.4mm (3/32"), 3.2mm (1/8"), 4.0mm(5/32"), 4.8mm (3/16")




Nozzles Supplied (mm)	Order Code
2.4, 3.2, 4.0, 4.8	KEN-569 -2040K

KENNEDY QUALITY INDUSTRIAL TOOLING Heavy Duty Lever Action Riveter

Produces strong, vibration proof joints effortlessly. Replaces screws, bolts, ordinary rivets, brazing, soldering and welding. Moulded comfort grip. Long nose design, ideal for use in recessed areas. With enamelled steel body with storage for four nozzles and quick change wrench.

Supplied with nozzles: 2.4, 3.2, 4.0 and 4.8mm.
Supplied with 60 assorted aluminium rivets: 2.4mm (3/32"), 3.2mm (1/8"), 4.0mm (5/32") and 4.8mm (3/16").

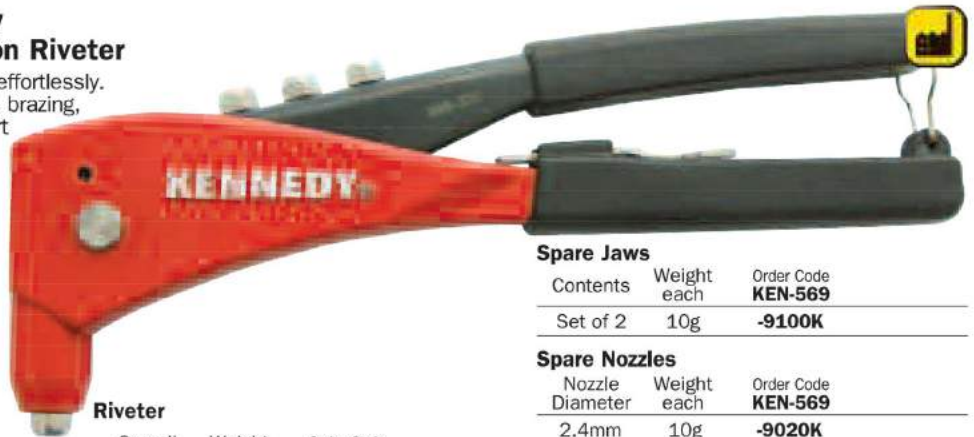

Riveter		
Overall Length	Weight each	Order Code
260mm	840g	KEN-569 -3000K

Spare Jaws		
Contents	Weight each	Order Code
Set of 2	10g	KEN-569 -9100K

Spare Nozzles		
Nozzle Diameter	Weight each	Order Code
2.4mm	10g	KEN-569 -9020K
3.2mm	10g	-9030K
4.0mm	10g	-9040K
4.8mm	10g	-9050K


HAND TOOLS

Rivet Nut Inserter

Model RNI410

This sturdy professional quality tool has been designed for the insertion of rivet nuts into sheet metal. It has a cast body with a corrosion-resistant powder-coated finish, heavy-duty steel levers with soft grips for user comfort and a knurled adjustment ring for material thickness setting. It also has a pump action mandrel turning shaft for quick loading of fasteners.

Includes: Set of five nose piece kits, M4, 5, 6, 8 and 10 plus instruction manual.

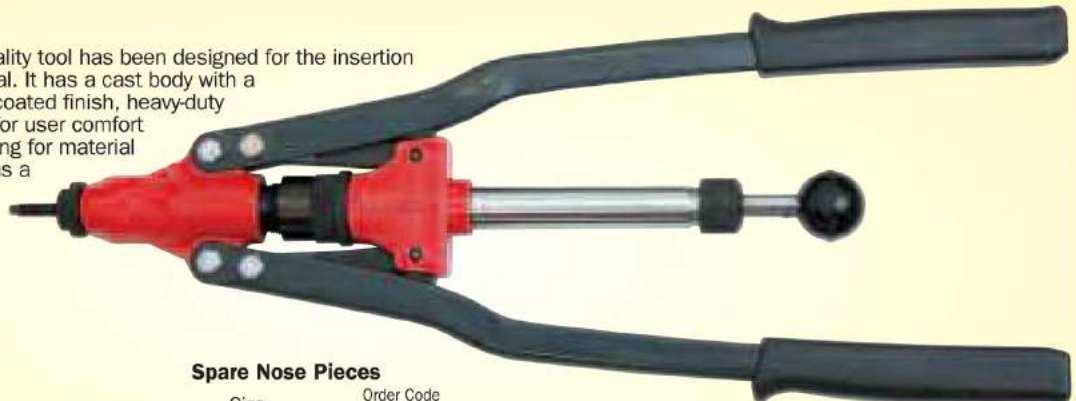

Spare Nose Pieces	
Size	Order Code
M4	KEN-569 -9300K
M5	-9310K
M6	-9320K
M8	-9330K
M10	-9340K

Nozzles Supplied	Order Code
M4, 5, 6, 8 & 10	KEN-569 -3080K



KOBE Rivet Nut Attachment

This attachment has been specifically designed to insert rivet nuts into sheet metal. Rapid loading of inserts improves productivity. 1/4" hex drive makes it suitable for use with cordless, electric or air screwdrivers. Robust moulded polycarbonate body with fluted sides for extra grip. 26mm hexagonal moulding for gripping with a suitable wrench. Complete with a set of three threaded mandrels, M4, M5 and M6.



Body Length	Weight each	Order Code
125mm	245g	KBE-280 -0100A








KENNEDY Industrial
Lazy Tong Riveter

The powerful one-handed compression action and all steel construction make this ideal for rapid, repetitive riveting applications. The contoured handle provides a comfortable grip for the user and reduces fatigue. In-handle storage of different nozzle sizes ensures rapid nozzle changing when required.

Length closed: 300mm. **Extended:** 825mm.

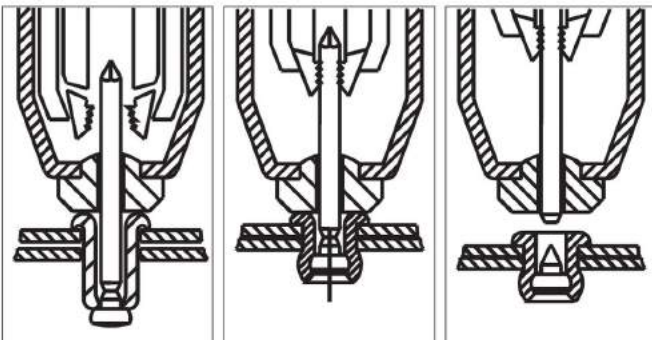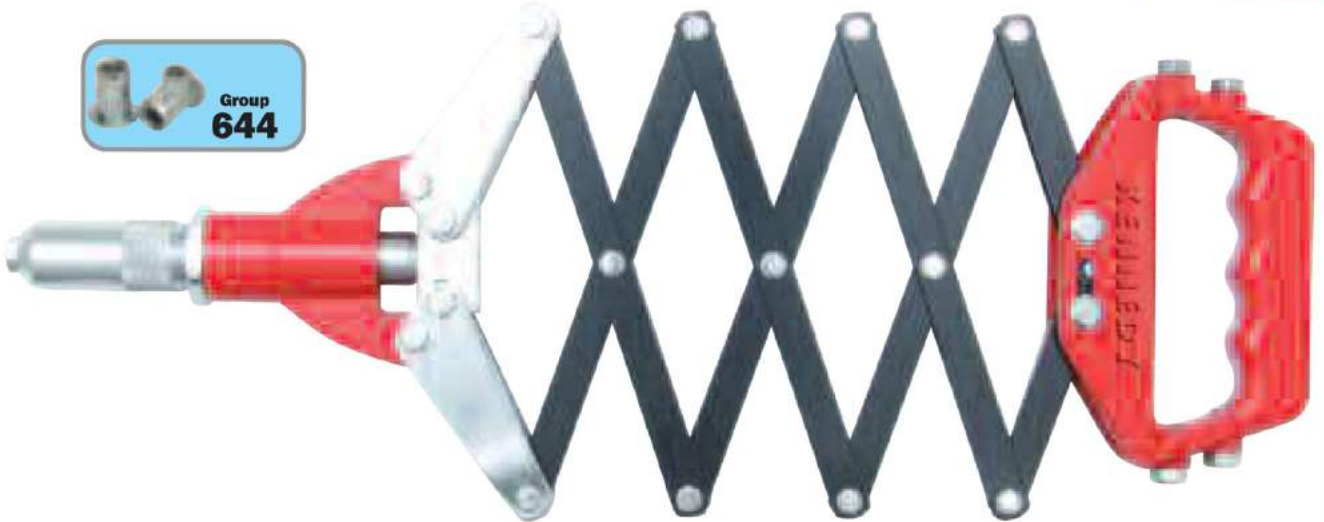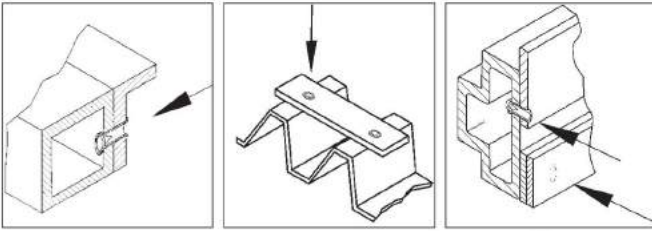

Replacement Jaws

Contents	Weight each	Order Code
Set of 3	10g	KEN-569 -9120K

Replacement Nozzles

Contents	Weight each	Order Code
3.2mm	10g	-9070K
4.0mm	10g	-9080K
4.8mm	10g	-9090K
6.0mm	10g	-9092K
6.4mm	10g	-9094K

Lazy Tong Riveter

Nozzles Supplied	Weight each	Order Code
3.2, 4, 4.8, 6.0 & 6.4mm	2.30kg	KEN-569 -3020K

KENNEDY Professional Long Arm Riveting Tool

Heavy duty industrial grade riveter for use with aluminium, steel and stainless steel rivets. Unique mechanism reduces operator effort by 40%. Ergonomically designed PVC shock-proof handle to eliminate operator fatigue. Easy and effortless to use with its long arm design. Quick change nozzles are stored in the stem catcher.

Complete with 5 nozzles for rivet sizes:

- 2.4mm (3/32"),
- 3.2mm (1/8"),
- 4.0mm (5/32"),
- 4.8mm (3/16"),
- 6.4mm (1/4")



Long Arm Riveting Tool

Nozzles Supplied	Order Code
2.4, 3.2, 4.0, 4.8 & 6.4mm	KEN-569 -2060K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

HAND TOOLS

KENNEDY Pro-Torq
PROFESSIONAL Screwdrivers

Chrome vanadium steel blades with magnetic tips. Fitted with unique dual grip triangular handle which has been designed for improved user comfort, allowing more torque to be applied.



With convenient hanging hole in the handle for storage.


Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 screwdriver would be suitable for most applications. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
No.0	75mm	25g	-5110K
No.1	75mm	55g	-5120K
No.1	250mm	80g	-4490K
No.2	Stubby	40g	-5180K
No.2	100mm	85g	-5140K
No.2	250mm	120g	-4500K
No.3	150mm	145g	-5150K
No.4	200mm	210g	-5160K

PZ/Supadriv

PZ/Supadriv has extra 'cutaways' to help drive the screw. Favoured by the construction and joinery trade. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
No.2	Stubby	45g	-5280K
No.0	75mm	25g	-5290K
No.1	75mm	55g	-5300K
No.1	250mm	80g	-5360K
No.2	100mm	85g	-5310K
No.2	250mm	120g	-5370K
No.3	150mm	145g	-5320K
No.4	200mm	210g	-5340K

Parallel Tip

To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. **DIN ISO 2380.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
3.2mm	100mm	25g	-5650K
3.2mm	150mm	30g	-5660K
4.0mm	300mm	50g	-5400K
5.5mm	75mm	55g	-5710K
5.5mm	100mm	60g	-5720K
5.5mm	150mm	65g	-5730K
5.5mm	200mm	75g	-5740K
5.5mm	250mm	80g	-5750K
5.5mm	260mm	81g	-5404K

Flared Tip, Round Blade

To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. **DIN ISO 2380.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
3.2mm	75mm	25g	-5425K
6.5mm	Stubby	40g	-5420K
6.5mm	100mm	85g	-5430K
6.5mm	150mm	100g	-5440K
8.0mm	200mm	170g	-5450K
10.0mm	250mm	240g	-5460K

Flared Tip, Square Blade

Square bladed screwdrivers can be gripped in a spanner or locking wrench to allow greater torque to be applied from the side rather than from directly above the screwdriver. **DIN ISO 2380.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
6.5mm	100mm	90g	-5500K
6.5mm	150mm	105g	-5510K
8.0mm	200mm	185g	-5520K
10.0mm	250mm	275g	-5530K
10.0mm	300mm	305g	-5550K

TX

TX head screws are used predominantly for engineering and automotive applications. The design of the screw allows high torque levels to be applied without the driver slipping potentially damaging the components.



Tip Size	Blade Length	Weight each	Order Code KEN-572
T6	75mm	30g	-5260K
T7	75mm	30g	-5262K
T8	75mm	30g	-5264K
T9	75mm	30g	-5266K
T10	100mm	60g	-5268K
T15	100mm	60g	-5270K
T20	100mm	25g	-5272K
T25	100mm	85g	-5274K
T30	100mm	85g	-5276K

For Pro-Torq Screwdriver Sets, See Next Page . . .

KENNEDY 'Hi-Grip' Pound Thru'
QUALITY INDUSTRIAL TOOLING Screwdrivers

Through blade screwdriver with chrome vanadium steel blades and striking heads, suitable for striking with a hammer to free up seized screws. Fully hardened magnetic tips. Comfortable moulded grip. Hexagon blades. **DIN ISO 2380/8764.**


Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 screwdriver would be suitable for most applications. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
No.1	75mm	100g	-3610K
No.2	100mm	150g	-3620K
No.3	150mm	220g	-3630K

Flared Tip

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. Hexagon blades. **DIN ISO 2380.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
6mm	100mm	150g	-3510K
6mm	150mm	160g	-3520K
8mm	200mm	240g	-3540K
9.5mm	250mm	315g	-3560K

Pound Thru' Set

Supplied in display box.



No.1 x 75,
No.2 x 100,
No.3 x 150.



6 x 100,
6 x 150,
8 x 200,
9.5 x 250.

7
PIECES



Weight
1.54kg
Order Code
KEN-572
-3700K



Chrome vanadium steel blades with magnetic tips. Fitted with a unique dual grip triangular handle designed for improved user comfort, allowing more torque to be applied. Manufactured with hanging hole in the handle for storage. **DIN ISO 2380/8764.**

6-Piece Set Contents (mm):
Crosspoint: No.1 x 75, No.2 x 100.
Flared: 6.3 x 100, 8.0 x 200.
Parallel: 5.0 x 75, 5.0 x 150.

**6
PIECES**



Weight each	Order Code
810g	KEN-572
	-5970K

6-Piece Set Contents (mm):
PZ: No.1 x 75, No.2 x 100.
Flared: 6.5 x 150, 10.0 x 250.
Parallel: 5.5 x 100, 5.5 x 200.

**6
PIECES**



Weight each	Order Code
925g	KEN-572
	-5975K

8-Piece Set Contents (mm):
Crosspoint: No.1 x 75, No.2 x 100, No.3 x 150.
PZ: No.2 x 100.
Flared: 6.3 x 150, 9.5 x 250.
Parallel: 5.0 x 100, 5.0 x 200.

**8
PIECES**



Weight each	Order Code
1280g	KEN-572
	-5990K

8-Piece Set Contents (mm):
Crosspoint: No.1 x 75, No.2 x 100, No.2 x 100.
Flared: 6.3 stubby, 6.3 x 100, 8.0 x 200.
Parallel: 5.0 x 75, 5.0 x 150.

**8
PIECES**



Weight each	Order Code
1010g	KEN-572
	-6000K

8-Piece Set Contents (mm):
Crosspoint: No.2 x stubby, No.2 x 100.
PZ: No.1 x 75, No.2 x 100, No.3 x 150.
Flared: 6.3 x 150, 8.0 x 200.
Parallel: 5.0 x 150.

**8
PIECES**



Weight each	Order Code
1105g	KEN-572
	-6010K

12-Piece Set Contents (mm):
Crosspoint: No.2 x stubby, No.2 x 100, No.3 x 150.
PZ: No.1 x 75, No.2 x 100, No.3 x 150.
Flared: 6.3 x stubby, 6.3 x 150, 9.5 x 250.
Parallel: 5.0 x 100, 5.0 x 200, 5.0 x 250.

**12
PIECES**



Weight each	Order Code
1660g	KEN-572
	-6020K

12-Piece Set Contents (mm):
Crosspoint: No.2 x stubby, No.1 x 75, No.2 x 100, No.3 x 150.
PZ: No.2 x 100, No.3 x 150.
Flared: 6.3 x stubby, 6.3 x 150, 8.0 x 200.
Parallel: 5.0 x 75, 5.0 x 150, 5.0 x 250.

**12
PIECES**



Weight each	Order Code
1467g	KEN-572
	-6030K

12-Piece Set Contents (mm):
Crosspoint: No.1 x 75, No.2 x stubby, No.2 x 100.
Flared: 6.3 x stubby, 6.3 x 100, 6.3 x 150, 8.0 x 200, 9.5 x 250.
Parallel: 5.0 x 75, 5.0 x 100, 5.0 x 200, 5.0 x 250.

**12
PIECES**



Weight each	Order Code
1581g	KEN-572
	-6040K

9-Piece TX Set Contents (mm):
TX: T6 x 75, T7 x 75, T8 x 75, T9 x 75, T10 x 100, T15 x 100, T20 x 100, T25 x 100, T30 x 100.

**9
PIECES**



Weight each	Order Code
790g	KEN-572
	-6050K



PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



Engineer's & Electrician's Screwdrivers

With a traditional 'fluted' design handle. High quality steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life. This range offers the widest choice of blade selection and blade length. The high impact plastic handles are acid and oil resistant. A comprehensive selection to meet the demands of modern industry.
DIN ISO 2380/8764.



Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
No.0	75	25g	-1000K
No.1	75	55g	-1010K
No.2	100	80g	-1020K
No.3	150	135g	-1030K
No.4	200	225g	-1040K
No.1	Stubby	60g	-1210K
No.2	Stubby	60g	-1220K

PZ/Supadriv

PZ/Supadriv has extra 'cutaways' to help drive the screw. Favoured by the construction and joinery trade. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
No.0	75	25g	-2000K
No.1	75	55g	-2010K
No.1	250	80g	-2510K
No.2	100	80g	-2020K
No.2	250	110g	-2520K
No.3	150	135g	-2030K
No.3	250	175g	-2530K
No.4	200	225g	-2040K
No.1	Stubby	60g	-2210K
No.2	Stubby	55g	-2220K

Flared Tip, Round Blade

Same as the parallel tip. **DIN ISO 2380.**



Tip Size (mm)	Blade Length	Weight each	Order Code KEN-572
6.5mm	Stubby	60g	-3020K
6.5mm	100	80g	-3040K
6.5mm	150	90g	-3060K
8.0mm	200	155g	-3080K
10.0mm	250	250g	-3100K
10.0mm	300	280g	-3120K

Parallel Tip

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. **DIN ISO 2380.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
3.2mm	50	25g	-4520K
3.2mm	75	25g	-4530K
3.2mm	100	25g	-4540K
3.2mm	150	30g	-4560K
5.5mm	75	55g	-5030K

Tip Size	Blade Length	Weight each	Order Code KEN-572
5.5mm	100	55g	-5040K
5.5mm	150	65g	-5060K
5.5mm	200	70g	-5080K
5.5mm	250	80g	-5100K

Flared Tip, Square Blade

Square bladed screwdrivers can be gripped in a spanner or locking wrench to allow greater torque to be applied from the side rather than from directly above the screwdriver. **DIN ISO 2380.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
6.5mm	100	85g	-4040K
6.5mm	150	95g	-4060K
8.0mm	200	175g	-4080K
10.0mm	250	285g	-4100K

HAND TOOLS

Set Contents (mm):



FLARED
6.5 stubby,
6.5 x 100,
6.5 x 150,
10.0 x 250.



PARALLEL
3.2 x 100,
5.5 x 150.



CROSS POINT
No.1 stubby,
No.1 x 75,
No.2 stubby,
No.2 x 100,
No.3 x 150.



**11
PIECES**

Weight each	Order Code KEN-572
1.0kg	-9900K

Set Contents (mm):




FLARED
6.5 stubby,
6.5 x 100,
8.0 x 200,
10.0 x 250.



PARALLEL
3.2 x 75,
3.2 x 150,
5.5 x 75,
5.5 x 150.



CROSS POINT
No.0 x 75,
No.1 stubby,
No.1 x 75,
No.2 stubby,
No.2 x 100,
No.3 x 150,
No.4 x 200.

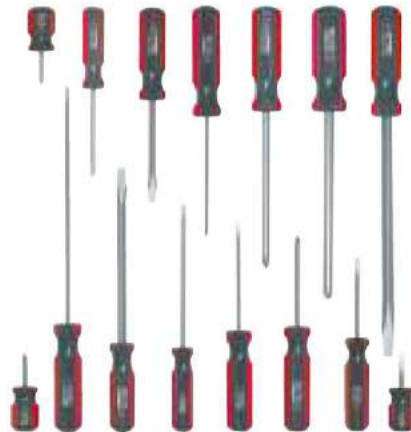

**15
PIECES**

Weight each	Order Code KEN-572
1.39kg	-9920K

Set Contents (mm):




FLARED
6.5 stubby,
6.5 x 100,
8.0 x 200.



PARALLEL
3.2 x 75,
3.2 x 150.



CROSS POINT
No.0 x 75,
No.1 stubby,
No.1 x 75,
No.2 stubby,
No.2 x 100,
No.3 x 150.

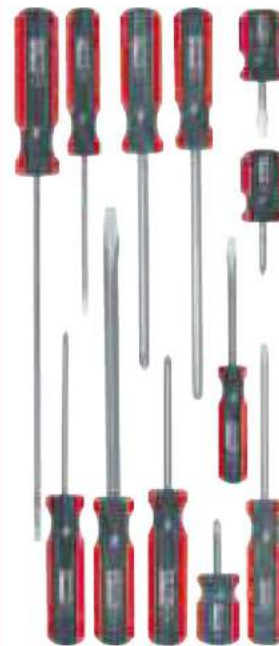

**12
PIECES**

Weight each	Order Code KEN-572
1.05kg	-5940K

Designed for maximum grip under load application. The red moulded cushion grip gives optimum operator comfort. Ideal for assembly work. Tough alloy steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life. **DIN ISO 2380/8764.**



*Flat blades have hexagon bolster to allow higher torque to be applied via a spanner.

Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
No.0	75mm	35g	-0000K
No.1	75mm	75g	-0010K
No.2	100mm	110g	-0020K
No.3	150mm	170g	-0030K
No.2	Stubby	65g	-0120K

PZ/Supadriv

PZ/Supadriv has extra 'cutaways' to help drive the screw. Favoured by the construction and joinery trade. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
No.1	75mm	75g	-0210K
No.2	100mm	110g	-0220K
No.3	150mm	170g	-0230K

Flared Tip, Round Blade

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. **DIN ISO 2380.**



Tip Size	Blade Length	Weight each	Order Code KEN-572
6.5mm	Stubby	65g	-0320K
6.5mm	100mm	115g	-0340K
6.5mm	150mm	125g	-0360K
8.0mm	200mm	195g	-0380K
10.0mm	250mm	265g	-0400K

TX

TX head screws are used predominantly for engineering and automotive applications. The design of the screw allows high torque levels to be applied without the driver slipping potentially damaging the components.




Tip Size	Blade Length	Weight each	Order Code KEN-572
T6	75mm	40g	-6060K
T7	75mm	40g	-6070K
T8	75mm	40g	-6080K
T9	75mm	40g	-6090K
T10	75mm	40g	-6100K
T15	100mm	80g	-6150K
T20	100mm	80g	-6200K
T25	100mm	110g	-6250K
T30	100mm	110g	-6300K

Set Contents (mm):

Supplied in clear plastic wallet.

Tip Size	Blade Length	Weight each	Order Code KEN-572
T6	75	40g	-6060K
T7	75	40g	-6070K
T8	75	40g	-6080K
T9	75	40g	-6090K
T10	75	40g	-6100K
T15	100	80g	-6150K
T20	100	80g	-6200K
T25	100	110g	-6250K
T30	100	110g	-6300K

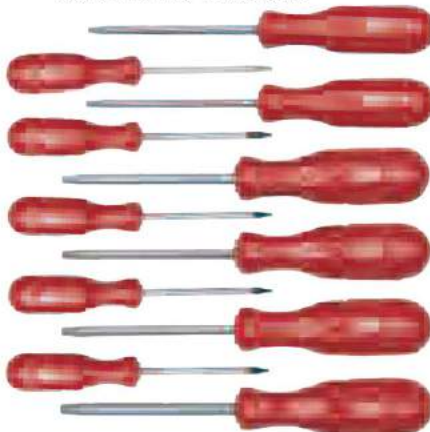**11
PIECES**


Weight each	Order Code KEN-572
830g	-6450K

Set Contents (mm):

Supplied in clear plastic wallet.

Tip Size	Blade Length	Weight each	Order Code KEN-572
No.1	75	75g	-0210K
No.2	100	110g	-0220K
No.3	150	170g	-0230K

Set Contents (mm):

Supplied in clear plastic wallet.

Tip Size	Blade Length	Weight each	Order Code KEN-572
6.5	Stubby	65g	-0320K
6.5	100	115g	-0340K
6.5	150	125g	-0360K
8.0	200	195g	-0380K
10.0	250	265g	-0400K

Set Contents (mm):

Tip Size	Blade Length	Weight each	Order Code KEN-572
No.1	75	75g	-0210K
No.2	100	110g	-0220K
No.3	150	170g	-0230K

**12
PIECES**

Number of Pieces	Weight each	Order Code KEN-572
8	1.05kg	-9870K
12	1.58kg	-0490K

**8
PIECES**

Cabinet Screwdrivers

Traditional design cabinet screwdrivers with matt grey high impact plastic handles to ensure a firm yet comfortable grip allowing constant use, giving maximum torque. Chrome alloy steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life. **DIN ISO 2380/8764.**

Contents (mm):

Supplied in clear plastic wallet.


Tip Size	Blade Length	Weight each	Order Code KEN-572
5.5	75	40g	-6060K
6.5	Stubby	65g	-0320K
6.5	100	115g	-0340K
6.5	150	125g	-0360K
8.0	200	195g	-0380K
10.0	250	265g	-0400K

**12
PIECES**

Tip Size	Blade Length	Weight each	Order Code KEN-572
No.1	75	75g	-0210K
No.2	100	110g	-0220K
No.3	150	170g	-0230K

Tip Size	Blade Length	Weight each	Order Code KEN-572
No.1	75	75g	-0210K
No.2	100	110g	-0220K
No.3	150	170g	-0230K

Weight each	Order Code KEN-572
1.45kg	-7490K

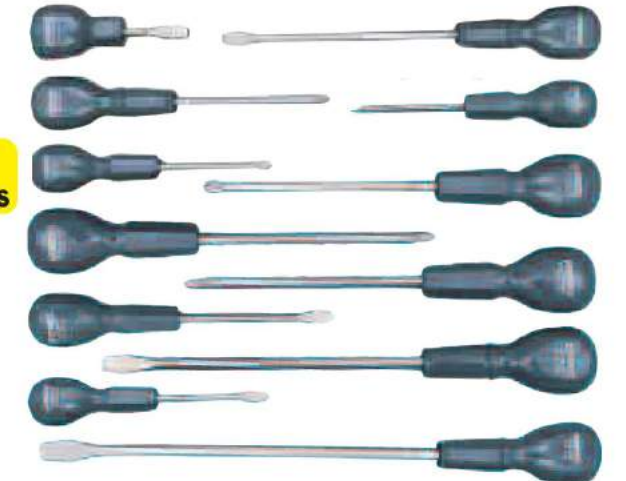

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

GROUP 572 SCREWDRIVERS

YAMOTO Tri-Line™ Screwdriver

Ergonomically designed handles which are dual material and three-sided for improved torque and reduced fatigue. Chrome vanadium steel blades with magnetic tips and a hanging hole in the handle.



Crosspoint



Tip Size	Blade Length	Weight each	Order Code YMT-572
No.1 75mm		64g	-3420K
No.1 100mm			-3440K
No.1 150mm			-3460K
No.1 200mm		96g	-3480K
No.2 100mm			-3500K
No.2 150mm			-3520K
No.2 200mm			-3540K
No.2 250mm			-3560K
No.2 300mm			-3580K

PZ/Supadriv



Tip Size	Blade Length	Weight each	Order Code YMT-572
No.2 100mm		96g	-3600K
No.2 200mm			-3620K

Parallel Tip



Tip Size	Blade Length	Weight each	Order Code YMT-572
3.0mm	75mm	36g	-2600K
5.0mm	150mm	76g	-2620K
5.0mm	200mm		-2640K
5.0mm	250mm		-2660K
6.0mm	200mm		-2700K

Flared Tip



Tip Size	Blade Length	Weight each	Order Code YMT-572
6.0mm	150mm	106g	-2800K
6.0mm	200mm		-2820K
6.0mm	250mm		-2840K
6.0mm	300mm		-2860K
6.0mm	Stubby	44g	-2740K
8.0mm	150mm		-2880K
8.0mm	200mm	176g	-2900K
8.0mm	250mm		-2920K
8.0mm	300mm		-2940K
10.0mm	250mm		-2960K

Tri-Line Screwdriver Sets

8-Piece Set Contents (mm):

- No.1 x 75, No.2 x 100.
- 3 x 75, 5 x 150.
- No.2 x 100.
- 6 x 150, 8 x 200, 6 x stubby.

6-Piece Set Contents (mm):

- No. 1 x 75, No. 2 x 100.
- 6 x 150, 8 x 200.
- 3 x 75, 5 x 150.



Number of Pieces	Weight each	Order Code YMT-572
6	715g	-2060K
8	875g	-2080K



HAND TOOLS

YAMOTO Mechanic's Screwdrivers

Featuring a classic slimline design favoured by the automotive industry. Black high impact plastic handles. Chrome finish alloy steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life. Flat blades have hexagon bolster to allow extra torque to be applied using a spanner.



Crosspoint



Tip Size	Blade Length	Weight each	Order Code YMT-572
No.1 75mm		45g	-0510K
No.2 100mm		75g	-0520K
No.3 150mm		130g	-0530K
No.2 Stubby		50g	-0620K

PZ/Supadriv



Tip Size	Blade Length	Weight each	Order Code YMT-572
No.1 75mm		45g	-0710K
No.2 100mm		85g	-0720K
No.3 150mm		150g	-0730K

Flared Tip, Round Blade



Tip Size	Blade Length	Weight each	Order Code YMT-572
6.5mm	Stubby	50g	-0820K
6.5mm	100mm	80g	-0840K
6.5mm	150mm	90g	-0860K
8.0mm	200mm	155g	-0880K
10.0mm	250mm	250g	-0900K

Parallel Tip



Tip Size	Blade Length	Weight each	Order Code YMT-572
4.0	300mm	71g	-0320K
5.5	250mm	81g	-0340K
5.5	425mm	121g	-0350K
3 Piece Set		319g	-0400K

Set Contents (mm):

Supplied in clear plastic wallet.

- 6.3 stubby, 6.3 x 100, 6.3 x 150, 8.3 x 200 and 9.5 x 250mm.
- No.1 x 75, No.2 x 100 and No.3 x 150mm.

- No.1 x 75, No.2 x 100 and No.3 x 150mm.

8 PIECES

Weight each	Order Code YMT-572
820g	-0980K

Set Contents (mm):
Supplied in clear plastic wallet.

- 6.3 stubby, 6.3 x 100, 6.3 x 150, 8.3 x 200 and 9.5 x 250mm.
- No.1 x 75, No.2 x 100 and No.3 x 150mm.
- No.1 x 75, No.2 stubby, No.2 x 100 and No.3 x 150mm.

- No.1 x 75, No.2 stubby, No.2 x 100 and No.3 x 150mm.

- No.1 x 75, No.2 stubby, No.2 x 100 and No.3 x 150mm.

- No.1 x 75, No.2 stubby, No.2 x 100 and No.3 x 150mm.

- No.1 x 75, No.2 stubby, No.2 x 100 and No.3 x 150mm.

12 PIECES

Weight each	Order Code YMT-572
1.21kg	-0990K



SENATOR Dual Grip Screwdriver Sets

Comfort rubber grip handles with chrome vanadium, chrome-plated blades and magnetic tips.

Contents (mm):
No.2 x 100,
No.3 x 150.

- 3 x 75,
5 x 150.
- 8 x 200.

**5
PIECES**



Rubber Grip Handles

Weight each
600g

Order Code
SEN-572
-9050K



SCREWDRIVERS

GROUP
572

Contents (mm):
6.3 stubby,
6.3 x 100
and
8.0 x 200.

3.0 x 75 and
4.0 x 100.

No.2 stubby,
No.1 x 75.
and
No.2 x 100.

**8
PIECES**



Acrylic Handles

Weight each
580g

Order Code
SEN-572
-9890K



Contents (mm):
No.2 x 100,
No.3 x 150,
No.2 stubby

- No.2 x 100,
No.3 x 150.
- 3 x 75,
5 x 150,
5 x 250.
- 8 x 200,
6 stubby.

**10
PIECES**



Rubber Grip Handles

Weight each
995g

Order Code
SEN-572
-9100K



Contents (mm):
No.1 x 75,
No.2 x 100,
No.3 x 150,
No.2 x stubby

No.1 x 75,
No.2 x 100,
No.3 x 150.

- 3 x 75,
5 x 150,
5 x 200,
5 x 250.
- 6 x 150,
8 x 200,
9.5 x 300,
6 x stubby.

**15
PIECES**

Rubber Grip Handles


Weight each
1.63kg

Order Code
SEN-572
-9150K



KENNEDY Offset Double-Ended Screwdrivers

Designed to give access into otherwise restricted areas. A versatile tool suitable for use in many applications.

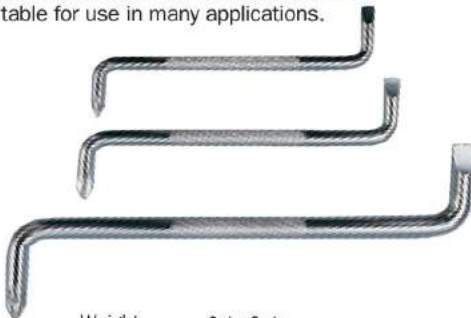

Size	Weight each	Order Code
No.1 x 3/16"	20g	-4210K
No.2 x 1/4"	30g	-4220K
No.3 x 5/16"	80g	-4230K
Set - 1 each of above	140g	-4250K

Mini Screwdriver

Extra light duty screwdriver with magnetic tips. Designed for use on terminals and other electrical work.

N.B. Do not use on live circuits.



Size	Weight each	Order Code
No.0 x 65	10g	-5190K
3.0mm x 65	10g	-5220K
3.0mm x 100	10g	-5240K
Set - 1 each of above	35g	-5250K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY Insulated Interchangeable
Screwdriver Set

Ergonomic insulated full size handle, swivel cap and eight interchangeable drivers supplied in a compact protective pouch with belt loop. 2-in-1 design, use the detachable swivel cap for fast (low torque) driving, or use the full size detachable ergonomic handle for higher torque fastening. Safe up to 1000V AC/1500V DC.



10
PIECES

10-Piece Set Contents (mm):

- PARALLEL
- 0.4 x 2.5 x 100mm,
 - 0.5 x 3.0 x 100mm,
 - 0.8 x 4.0 x 100mm,
 - 1.0 x 5.5 x 100mm and
 - 1.2 x 6.5 x 100mm.

- CROSS POINT
- No.0 x 100mm,
 - No.1 x 100mm and
 - No.2 x 100mm.

Weight each	Order Code
365g	KEN-572 -5870K

1000V Dual Grip VDE Screwdrivers

A fully insulated screwdriver VDE tested up to 1000V. Professional high grip handles, magnetic tips, chrome vanadium steel blades.



Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.



Parallel Tip

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head.



Tip Size	Blade Length	Weight each	Order Code
No.0	60mm	20g	-7900K
No.1	80mm	60g	-7910K
No.2	100mm	90g	-7920K

Tip Size	Blade Length	Weight each	Order Code
2.5mm	75mm	20g	-7940K
4.0mm	100mm	60g	-7950K
5.5mm	125mm	75g	-7960K
6.5mm	150mm	110g	-7970K

Set Contents (mm):

- PARALLEL
- 2.5 x 75,
 - 4.0 x 100,
 - 5.5 x 125,
 - 6.5 x 150mm.

- CROSS POINT
- No.0 x 60,
 - No.1 x 80,
 - No.2 x 100mm.



7
PIECES

Weight each	Order Code
715g	KEN-572 -8000K

Electrician's VDE Square Section Handle Screwdrivers

Volt-tested to ensure safety on or near electrical equipment up to 1000V AC or 1500V DC. Insulated blades with magnetic tips. Conform with **DIN 7438** and **DIN EN 60900**.



Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.



Parallel Tip

Slotted head screws are the most commonly used screw. The tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping.



Tip Size	Blade Length	Weight each	Order Code
No.0	75mm	27g	-5820K
No.1	100mm	50g	-5830K
No.2	100mm	80g	-5840K

Tip Size	Blade Length	Weight each	Order Code
2.5mm	85mm	30g	-5760K
4.0mm	100mm	45g	-5780K
5.5mm	125mm	80g	-5790K
6.5mm	150mm	100g	-5800K

Set Contents (mm):
Supplied in clear plastic wallet.

- PARALLEL
- 2.5 x 85,
 - 4.0 x 100,
 - 5.5 x 125,
 - 6.5 x 150mm.

- CROSS POINT
- No.0 x 75,
 - No.1 x 100,
 - No.2 x 100mm.



7
PIECES

Weight each	Order Code
495g	KEN-572 -5900K



KENNEDY Spiral Ratchet Screwdrivers

Polished chrome plated body. 3-way ratchet. Quick release chuck, with swivel grip. Lacquered wooden handles. Chrome vanadium steel bits. Supplied with No.1 and No.2 crosspoint and 5.5mm and 7.0mm flared screwdriver bits.



Overall length: closed 300mm
extended 480mm (inc. bit)



Size	Order Code
430mm	KEN-572 -8160K

Bits

Bits Sizes	Order Code
5.5mm Flat	-8820K
7.0mm Flat	-8840K
No.1 Crosspoint	-8860K
No.2 Crosspoint	-8880K



Combined & Fluted Handle Screwdriver Set

Seven 'volt-tested' screwdrivers plus five non-insulated engineer's and electrician's screwdrivers. Supplied in clear plastic wallet.

12-Piece Set Contents (mm):

Non-Insulated

- 6.3 stubby.
- 4.8 x 75, 4.8 x 150 and 4.8 x 250.

Volt-Tested

- 2.5 x 85, 4.0 x 100, 5.5 x 125 and 6.5 x 150.



- No.2 x 1/4" slotted offset.
- No.0 x 75,
- No.1 x 100,
- No.2 x 100.



Weight each	Order Code
745g	KEN-572 -5920K

12 PIECES

Precision Screwdrivers

Have nickel chrome molybdenum steel blades, hardened and tempered. Chrome plated, with swivel tops which resist oil and acid. Supplied in plastic cases. Ideal for jewellers and watchmakers.

Parallel



Tip Size (mm)	Weight each	Order Code
1.0	5g	-9100K
1.2	10g	-9110K
1.4	10g	-9120K
1.8	10g	-9130K
2.0	10g	-9140K
2.4	15g	-9150K
3.0	20g	-9160K
3.8	30g	-9170K

Awl



Weight each	Order Code
15g	KEN-572 -9300K

Crosspoint



Tip Size (mm)	Weight each	Order Code
PH0.4	5g	-9200K
PH0.3	10g	-9210K
PH0.2	10g	-9220K
PH0	15g	-9230K
PH1.1	30g	-9250K

Magnet



Weight each	Order Code
15g	KEN-572 -9320K

Precision Jeweller's Screwdriver Set

12-in-1 Set

This handy jeweller's screwdriver set has six interchangeable 30 x 3.6mm hex. double ended bits.

Contents: 1.00, 1.50, 2.00, 2.50, 3.00, 3.50, T20, PH000, PH00, PH0, PH1, PZ0.

7 PIECES



Handle size: 90 x 7.7mm diameter.

Order Code
KEN-572 -9000K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

A quality range of precision screwdrivers. Combination tool and driver sets have carbon steel blades (tweezers are stainless steel). Driver only sets have nickel chrome molybdenum alloy steel blades. All with attractive chromed handles.

Crosspoint & Flat Blade Set
Contents:

1.0, 1.2,
 1.4, 1.8,
 2.4 and
 3.0mm.

PHO-2,
 PHO and
 PH1
 Fine point
 awl and
 tweezers.

11
PIECES

 Weight
 each
 220g

 Order Code
KEN-572
-9040K

Hexagon Key Driver Set
Contents:

0.9, 1.3,
 1.5, 2.0
 and 2.5mm.

6
PIECES

 Weight
 each
 130g

 Order Code
KEN-572
-9886K

Crosspoint & Flat Blade Set
Contents:

1.0, 1.2,
 1.4, 1.8,
 2.4 and
 3.0mm.

PHO-4,
 PHO-3,
 PHO-2,
 PHO and
 PH1.

11
PIECES

 Weight
 each
 210g

 Order Code
KEN-572
-9050K

Parallel & Crosspoint Set
Contents:

1.4, 2.0,
 2.4, and
 3.0mm.

PHO and
 PH1.

6
PIECES

 Weight
 each
 155g

 Order Code
KEN-572
-9090K

Crosspoint & Flat Blade Set
Contents:

1.0, 1.2,
 1.4, 1.8, 2.4
 and 3.0mm.

PHO-2, PHO
 and PH1,
 fine point,
 awl and
 magnet.

11
PIECES

 Weight
 each
 225g

 Order Code
KEN-572
-9060K

Crosspoint Set
Contents:

PHO-4,
 PHO-3,
 PHO-2,
 PHO,
 PH1-2
 and PH1.

6
PIECES

 Weight
 each
 140g

 Order Code
KEN-572
-9080K

Flat Blade Set
Contents:

1.0, 1.4,
 2.0, 2.4,
 3.0 and
 3.8mm.

6
PIECES

 Weight
 each
 155g

 Order Code
KEN-572
-9070K

Nut Driver Set
Contents:

3.0, 3.5,
 4.0, 4.5
 and
 5.0mm.

5
PIECES

 Weight
 of each
 170g

 Order Code
KEN-572
-9888K



KENNEDY PROFESSIONAL Pro-Torq Precision Screwdrivers

Expert quality, hardened and tempered chrome alloy steel blades with black oxide tips. Fitted with a unique dual grip handle with revolving top designed for added user comfort whilst allowing more torque to be applied.


Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.



Tip Size	Blade Length	Weight each	Order Code KEN-572
No.0-3	40	15g	-4430K
No.0-2	40	15g	-4390K
No.0-2	75	15g	-4420K
No.0-0	40	15g	-4380K
No.0	75	15g	-4400K
No.1	100	20g	-4410K

Parallel Tip

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head.



Tip Size	Blade Length	Weight each	Order Code KEN-572
1.4mm	40	15g	-4300K
2.0mm	40	15g	-4310K
2.4mm	40	15g	-4320K
3.0mm	40	15g	-4330K
2.4mm	75	15g	-4340K
3.0mm	75	20g	-4350K
4.0mm	100	25g	-4360K

TX

TX head screws are used predominantly for engineering and automotive applications. The design of the screw allows high torque levels to be applied without the driver slipping.



Tip Size	Blade Length	Weight each	Order Code KEN-572
T6	40	15g	-6470K
T8	40	15g	-6472K
T9	50	15g	-6474K
T10	50	15g	-6476K
T15	60	20g	-6478K
T20	60	20g	-6480K

Set

Alloy steel blades, black oxidised tips, dual material handles for improved grip, revolving end caps. Supplied in leatherette zip around case.

Set Contents:

- T6 x 40, T8 x 40, T9 x 50, T10 x 50, T15 x 60 and T20 x 60.


Group 558


Weight each
170g

Order Code
KEN-572
-6490K

Set

All screwdrivers have 40mm blade length. Complete with protective zip case.

Set Contents:

- 1.4, 2.0, 2.4 and 3.0mm.



- PH0-3, PH0-2 and PH-0.

**7
PIECES**


Weight each
165g

Order Code
KEN-572
-4450K

Set

Complete with protective zip case.

Set Contents:

- 1.4 x 40mm, 2.0mm x 40mm, 2.4mm x 75mm, 3.0mm x 75mm and 4.0mm x 100mm.



- PH0-3 x 40mm, PH0-2 x 75mm, PH-0 x 75mm and PH1 x 100mm.

**9
PIECES**


Weight each
265g

Order Code
KEN-572
-4470K



PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

**GROUP
573**

SCREWDRIVER BITS



**Heavy Duty
Magnetic Driver**

Square section mechanic's pattern handle. Suitable for use with 1/4" hexagon driver bits etc. Hexagonal blade also allows the application of a spanner for high torque.



Overall Length	Weight Per 5	Order Code
200mm (8")	750gm	-7070K

Magnetic Screwdriver Bit Holder

Chrome vanadium steel blade with moulded dual grip handle for improved user comfort allowing more torque to be applied. Fixed blade with a quick release magnetic chuck.

Overall length: 185mm.
Blade length: 80mm.



Overall Length	Order Code
200mm (8")	-7420K

Reversible Blade Screwdriver

145mm long reversible hexagon blade with 6mm flat point and No.2 crosspoint ends. Cabinet handle style.

Overall length: 155mm.



Overall Length	Weight Per 5	Order Code
155mm/6"	55gm	-7400K

6-in-1 Handles

Contoured grip plastic grip handle for improved comfort, control and higher torque. In-handle storage of up to six bits. Magnetic bit retention.

Ratchet

Switchable forward, reverse and fixed positive industrial quality ratchet action. Bright finish chrome vanadium blade.



Fixed

Chrome vanadium steel blade with plastic sheaving to prevent damage to fragile components.



Supplied with 25mm long 6mm (1/4") hex bits:



Crosspoint No.1 and 2. **PZ** No.1 and 2. **Flat:** 5 and 6mm.

Handle Type	Overall Length	Weight each	Order Code
Ratchet	200mm (8")	175g	-7040K
Fixed	200mm (8")	205g	-7060K

KENNEDY PROFESSIONAL Magnetic Screwdriver Bit Set

11 piece 1/4" hexagon bits. Chrome vanadium steel blade with moulded dual grip handle designed for improved user comfort allowing more torque to be applied.

Switchable forward, reverse and fixed positive industrial quality ratchet action. Bright finish chrome vanadium blade.

Contents
25mm Driver Bits:

- ⊕ Crosspoint: No.1, 2 & 3
- ⊕ PZ: No.1, 2 & 3
- ⊖ Flat: 3, 4, 5 & 6mm

**11
PIECES**



Product Number	Overall Length	Order Code
DBH100	200mm (8")	-7050K

Torsion Bits 1/4" Hex Drive



Manufactured from chrome vanadium for greater impact resistance and a longer lasting bit. Colour coded to aid speedier recognition.

Crosspoint 25mm



Point Size	Overall Length	Order Code
No.1	25	-8220K
No.2	25	-8222K
No.3	25	-8224K
No.2	50	-8226K
No.3	50	-8228K



Point Size	Overall Length	Order Code
0.8 x 4.0	25	-8240K
0.6 x 4.5	25	-8242K
0.6 x 4.5	25	-8244K
0.6 x 4.5	25	-8246K

PZ Torsion 25mm



Point Size	Overall Length	Order Code
No.1	25	-8250K
No.2	25	-8252K
No.3	25	-8254K
No.1	50	-8256K
No.2	50	-8258K
No.3	50	-8260K

Square Torsion 25mm



Point Size	Overall Length	Order Code
No.1	25	-8262K
No.2	25	-8264K
No.3	25	-8266K

TX Torsion 25mm



Point Size	Overall Length	Order Code
TX10	25	-8270K
TX15	25	-8272K
TX20	25	-8274K
TX25	25	-8276K
TX30	25	-8278K
TX40	25	-8280K

Hexagon 25mm



Point Size	Overall Length	Order Code
No.1	25	-8290K
No.2	25	-8292K
No.3	25	-8294K
No.2	50	-8296K
No.3	50	-8298K

60mm Torsion Quick Magnetic Bit Holder

For use with the Kennedy Torsion Bit Set (KEN-573-6460K)



Overall Length	Order Code
60mm	-8720K

HAND TOOLS

**KENNEDY**
QUALITY INDUSTRIAL TOOLING**Screwdriver Bits**

All Kennedy screwdriver bits have a hardness of 58 - 62HRC. S2 alloy steel with phosphate finish. For use with hand and power tools.

SCREWDRIVER BITS**GROUP 573****1/4" Hex Drive Bits****Flat**

Point Size	Overall Length	Weight each	Order Code KEN-573
3.0	25	5g	-1360K
3.0	38	5g	-1760K
3.5	25	5g	-1370K
3.5	38	5g	-1770K
4.0	25	5g	-1380K
4.0	38	5g	-1780K
4.5	25	5g	-1390K
4.5	38	5g	-1790K
5.0	25	5g	-1400K
5.0	38	5g	-1800K
5.0	150	30g	-1170K
5.5	25	5g	-1410K
5.5	38	10g	-1810K
5.5	150	30g	-1172K
6.0	25	5g	-1420K
6.0	38	10g	-1820K
6.0	150	30g	-1174K
6.5	25	5g	-1430K
6.5	38	10g	-1830K
8.0	25	5g	-1460K
8.0	38	10g	-1860K
10.0	25	10g	-1500K

PZ

Point Size	Overall Length	Weight each	Order Code KEN-573
No.0	25	5g	-1100K
No.1	25	5g	-1110K
No.1	50	10g	-1710K
No.1	150	30g	-1160K
No.2	25	5g	-1120K
No.2	50	10g	-1720K
No.2	150	30g	-1162K
No.3	25	5g	-1130K
No.3	50	10g	-1730K
No.3	150	30g	-1164K
No.4	25	5g	-1140K

Crosspoint

Point Size	Overall Length	Weight each	Order Code KEN-573
No.0	25	5g	-1000K
No.1	25	5g	-1010K
No.1	50	10g	-1610K
No.1	150	30g	-1150K
No.2	25	5g	-1020K
No.2R	25	5g	-1022K
No.2	50	10g	-1620K
No.2	150	30g	-1152K
No.3	25	5g	-1030K
No.3	50	10g	-1630K
No.3	150	30g	-1154K
No.4	25	5g	-1040K
No.4	32	30g	-1156K

1/4" Hexagon Drive Cup Hook Driver Bit

A hollowed out 'Y' shaped driver bit designed for the driving in of cup hooks.



Overall Length	Order Code KEN-573
25mm	-7500K

**TX**

Tip Size	Overall Length	Weight each	Order Code KEN-573
1/4" Hex Bits			
TX5	25	5g	-3558K
TX6	25	5g	-3560K
TX7	25	5g	-3570K
TX8	25	5g	-3580K
TX9	25	5g	-3590K
TX10	25	5g	-3600K
TX15	25	5g	-3650K
TX20	25	5g	-3700K
TX25	25	5g	-3750K
TX27	25	5g	-3770K
TX30	25	5g	-3800K
TX40	25	5g	-3900K
TX45	25	5g	-3910K
TX50	25	5g	-3920K

Tamperproof TXS

For repair and servicing on electronic, electrical and mechanical equipment.



Tip Size	Overall Length	Weight each	Order Code KEN-573
TX6	25	4g	-4100K
TX7	25	4g	-4110K
TX8	25	4g	-4120K
TX9	25	4g	-4130K
TX10	25	4g	-4140K
TX15	25	4g	-4150K
TX20	25	4g	-4160K
TX25	25	4g	-4170K
TX27	25	5g	-4180K
TX30	25	5g	-4190K
TX40	25	5g	-4200K

1/4" Hex Contractor Packs

The most popular style driver bits, multi-packed for economy. Supplied in plastic pocket cases that are ideal for the industrial user.

Insert Bits: plain shank for use with bit adaptors etc.

Direct Bits: ball recessed for use in power tools.

No.2 PZ

Bit Style	Length mm	Pk Qty	Weight per Pk	Order Code KEN-573
Insert	25	10	60g	-1125K
Insert	50	5	60g	-1725K
Direct	53	5	60g	-2125K

No.2 Crosspoint

Bit Style	Length mm	Pk Qty	Weight per Pk	Order Code KEN-573
Insert	25	10	60g	-1025K
Insert	50	5	60g	-1625K

Hexagon

Point Size	Overall Length	Weight each	Order Code KEN-573
3/32"	25	5g	-3350K
1/8"	25	5g	-3360K
5/32"	25	5g	-3370K
3/16"	25	5g	-3380K
1/4"	25	5g	-3390K
7/32"	25	5g	-3400K
5/16"	25	5g	-3410K
1.5	25	5g	-3430K
2.0	25	5g	-3440K
2.5	25	5g	-3450K
3.0	25	5g	-3460K
4.0	25	5g	-3470K
5.0	25	5g	-3480K
5.5	25	5g	-3485K
6.0	25	5g	-3490K
7.0	25	5g	-3500K
8.0	25	5g	-3510K
10.0	25	5g	-3530K

Ball Point Hexagon

Hex Size	Overall Length	Weight each	Order Code KEN-573
1.5	25	5g	-3540K
2.0	25	5g	-3542K
2.5	25	5g	-3544K
3.0	25	5g	-3546K
4.0	25	5g	-3548K
5.0	25	5g	-3550K
6.0	25	5g	-3552K

Tamperproof Hex

Hex Size	Overall Length	Weight each	Order Code KEN-573
1.5	25	5g	-8680K
2.0	25	5g	-8682K
2.5	25	5g	-8684K
3.0	25	5g	-8686K
4.0	25	5g	-8688K
5.0	25	5g	-8690K
5.5	25	5g	-8692K
6.0	25	5g	-8694K
7.0	25	5g	-8696K
8.0	25	5g	-8698K

**TX20**

Bit Style	Length mm	Pk Qty	Weight per Pk	Order Code KEN-573
Insert	25	10	60g	-3705K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR


KENNEDY TiN Coated Screwdriver Bits

TiN coated bits improve wear resistance. For use with hand and power tools.

1/4" Hex Bits - Flat

Point Size	Length (mm)	Order Code
5.0	25	-8042K
6.0	25	-8044K

1/4" Hex Bits - Crosspoint

Point Size	Length (mm)	Order Code
No.1	25	-8010K
No.2	25	-8012K
No.2	50	-8052K
No.2	150	-8032K
No.3	25	-8014K

1/4" Hex Bits - PZ

Point Size	Length (mm)	Order Code
No.1	25	-8020K
No.1	50	-8060K
No.2	25	-8022K
No.2	50	-8062K
No.2	150	-8030K
No.3	25	-8024K
No.3	50	-8064K

1/4" Hex Bits - Hex

Point Size	Length (mm)	Order Code
2.5	25	-8102K
3.0	25	-8104K
4.0	25	-8106K
5.0	25	-8108K
6.0	25	-8110K
8.0	25	-8112K

1/4" Hex Bits - TX

Point Size	Length (mm)	Order Code
TX10	25	-8152K
TX15	25	-8154K
TX20	25	-8156K
TX25	25	-8158K
TX30	25	-8160K
TX40	25	-8162K

1/4" Direct Drive Bits - Crosspoint

Point Size	Length (mm)	Order Code
No.2	50	-8072K

1/4" Direct Drive Bits - PZ

Point Size	Length (mm)	Order Code
No.1	50	-8080K
No.2	50	-8082K

1/4" Powerbit - PZ

Point Size	Length (mm)	Order Code
No.2	70	-8092K
No.2	90	-8094K

5/16" Hex Bits - Crosspoint

Point Size	Length (mm)	Order Code
No.3	30	-8204K
No.4	30	-8206K

5/16" Hex Bits - PZ

Point Size	Length (mm)	Order Code
No.2	30	-8212K
No.3	30	-8214K
No.4	40	-8216K

Desoutter Shank Bits

5/16" hex. with Desoutter style ball locator.

Crosspoint

Point Size	Overall Length	Weight each	Order Code
No.2	53	15g	-3020K
No.2	94	15g	-3180K

PZ

Point Size	Overall Length	Weight each	Order Code
No.1	53	15g	-3110K
No.2	53	15g	-3120K
No.3	53	20g	-3130K

Desoutter Shank Adaptors

5/16" hexagon shank with Desoutter style ball locator. For use with insert bits.

Socket Hex	Overall Length	Weight each	Order Code
1/4"	46	35g	-6110K

Magnetic with Retainer

Socket Hex	Overall Length	Weight each	Order Code
1/4"	55	35g	-6030K

Socket Adaptor

1/4" hex. drive.

Square Drive	Length (mm)	Weight each	Order Code
1/4"	25	30g	-6250K
1/4"	50	60g	-6260K

Socket Driver Adaptor

1/4" Hexagon drive magnetic bit adaptor socket.

Square Drive	Length (mm)	Weight each	Order Code
1/4"	25	16g	-8710K

Direct Drive Adaptors for Power Tools

1/4" hexagon shank with ball recess. For use with insert bits.

Quick Release with Retainer

Socket Hex	Length (mm)	Weight each	Order Code
1/4"	60	50g	-6200K

Magnetic with Retainer

Socket Hex	Length (mm)	Weight each	Order Code
1/4"	74	70g	-6150K
5/16"	74	50g	-6170K

Magnetic

Socket Hex	Length (mm)	Weight each	Order Code
1/4"	60	20g	-6010K

1/4" Hex One Touch Adaptor

Included in the Kennedy 39 piece Socket and Screwdriver Bit Set (KEN-582-7910K).

Socket Hex	Order Code
1/4"	-9060K

Direct Drive Bits for Power Tools

1/4" Hex with ball recess.

TX

Point Size	Overall Length	Weight each	Order Code
TX7	38	5g	-3950K
TX8	38	5g	-3960K
TX9	38	5g	-4000K
TX10	38	5g	-4010K
TX15	38	5g	-4020K
TX20	38	5g	-4030K
TX25	38	5g	-4040K
TX27	38	10g	-4050K
TX30	38	10g	-4060K
TX40	38	10g	-4070K

Flat

Point Size	Overall Length	Weight each	Order Code
4.0	50	10g	-2180K
4.0	70	10g	-2320K
4.0	90	15g	-2340K
4.5	38	5g	-1520K
5.0	38	5g	-1530K
5.0	50	10g	-2200K
5.0	70	15g	-2322K
5.0	90	15g	-2342K
6.0	38	5g	-1550K
6.0	50	10g	-2220K
6.0	70	15g	-2324K
6.0	90	20g	-2344K
8.0	38	10g	-1560K
8.0	50	15g	-2260K
8.0	70	20g	-2326K
8.0	90	30g	-2346K
10.0	50	15g	-2300K
10.0	70	30g	-2328K
10.0	90	40g	-2348K

Crosspoint

Point Size	Overall Length	Weight each	Order Code
No.0	50	5g	-2000K
No.1	38	7g	-1210K
No.1	50	8g	-2010K
No.1	70	8g	-1340K
No.1	100	7g	-1350K
No.2	38	8g	-1220K
No.2	50	10g	-2020K
No.2	70	8g	-1342K
No.2	100	7g	-1352K
No.3	38	8g	-1230K
No.3	50	10g	-2030K
No.3	70	8g	-1344K
No.3	100	7g	-1354K
No.4	50	10g	-2040K

PZ

Point Size	Overall Length	Weight each	Order Code
No.1	38	7g	-1310K
No.1	50	10g	-2110K
No.1	70	20g	-2150K
No.1	90	21g	-2160K
No.2	38	8g	-1320K
No.2	50	10g	-2120K
No.2	70	20g	-2152K
No.2	90	25g	-2162K
No.3	38	8g	-1330K
No.3	50	10g	-2130K
No.3	70	20g	-2154K
No.3	90	25g	-2164K



Screwdriver Bit Set

Contents:

Hex: 2, 2.5, 3, 4, 5 and 6mm.
PZ: No.1 x2, No.2 x3, No.3 x2.
TX: TX10, TX15, TX20 TX25, TX30, TX40.
Crosspoint: No.0, No.1 x2, No.2 x3, No.3 x2.
Flat: 3, 4, 5, 6 and 6.5mm.
1/4" magnetic drive adaptor.

**33
PIECES**



Weight each	Order Code
240g	KEN-573

Flat & Crosspoint Bit Set

Flat: 3, 4, 5, 6 and 8mm.
Crosspoint: No.0, 1, 2 and 3.
All 1/4" hex. x 25mm overall length, complete with quick release 1/4" hexagon bit adaptor.

**10
PIECES**



Weight each	Order Code
120g	KEN-573

Tri-Wing Bit Set

Tri-Wing: 0, 1, 2, 3, 4, 5, 6, 7 and 8. All 1/4" hex. x 25mm. overall length, complete with quick release 1/4" hexagon bit adaptor.

**10
PIECES**



Weight each	Order Code
125g	KEN-573

Torx Bit Sets

T8, 9, 10, 15, 20, 25, 27, 30 and 40. All 1/4" hex. x 25mm overall length, complete with quick release 1/4" hexagon bit adaptor.

TX - Torx Bit Set

**10
PIECES**

TXS - Tamperproof Torx Bit Set



Set Type	Weight each	Order Code
TX	120g	-6430K
TXS	115g	-6440K


10mm AF Hex Drive Torx Bit Set

Contents: 1/2" Sq. drive x 10mm Hex. bit holder.

TORX 10 x 75mm: T20, T25, T30, T40, T45, T50 and T55.
TORX 10 x 30mm: T20, T25, T30, T40, T45, T50 and T55.

Torx is a registered trade mark of Camcar/Textron Inc.

**15
PIECES**

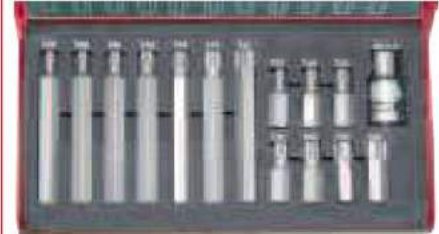

Weight each	Order Code
945g	KEN-573

Mechanic's & Engineer's Bit Sets

All 1/4" hex. x 25mm overall length, complete with magnetic spinner handle, 1/4" hexagon bit adaptor and 1/4" square socket adaptor.

**29
PIECES**

Mechanic's Bit Set

TX: T6, 7, 8, 9, 10, 15, 20, 25, 27, 30 and 40.

Crosspoint: No.1, 2 and 3.

Flat: 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5 & 8mm.

PZ: No.1, 2 and 3.

Engineer's Bit Set

Hexagon: 2, 3, 4, 5, 6, 7 and 8mm. 3/32", 1/8", 5/32", 3/16", 1/4", 7/32" and 5/16"

Flat: 3, 4, 5, 5.5, 6.5 and 8mm.

Crosspoint: No.1, 2 and 3.

PZ: No.1, 2 and 3.



Weight each	Order Code
480g	KEN-573

Weight each	Order Code
500g	KEN-573

Magnetic Hexagon Nut Setter 1/4" Drive Set

1/4" drive set consisting of 6 quick change hexagon nut setters with strong magnetic adhesion. For use on hexagon headed screws, bolts and nuts and compatible with impact drill/drivers. Manufactured from chrome vanadium steel and supplied in a robust case.

Set contents: 6, 7, 8, 10, 12, 13mm nut setters. Conforms to **DIN 3126, ISO 1173, style E 6.3.**



Order Code
KEN-573

**6
PIECES**

Single Nut Setters



Size (mm)	Order Code
6 x 65	-8920K
7 x 65	-8922K
8 x 65	-8924K
10 x 65	-8926K
11 x 65	-8928K
12 x 65	-8930K
13 x 65	-8932K
14 x 65	-8934K



KENNEDY
QUALITY INDUSTRIAL TOOLING

10mm Hexagon Power Bit Set

Contents:

3/8" and 1/2" Square x 10mm Hex Bit Adaptors. Moulded case.

30mm x 10mm Hex bits:

Hexagon: 4 -8, 10 and 12mm.

TX: Tx20, Tx25, Tx30, Tx40, Tx45, Tx50 and Tx55.

Spline: 5, 6, 8, 10 and 12mm.

75mm x 10mm Hex bits:

Hexagon: 4, 5, 6, 7, 8, 10 and 12mm.

TX: Tx20, Tx25, Tx30, Tx40, Tx45, Tx50 and Tx55.

Spline: 5, 6, 8, 10 and 12mm.

SCREWDRIVER BITS

GROUP
573



**40
PIECES**



Order Code

KEN-573

-6490K

Torsion Bit Set

Contents:

TX: 15, 20, 25.

Crosspoint: No 1, No 2, No 3

Pozidriv: No 2. Slotted: 4.0,5.5, 6.5mm

Hex: 3, 4, 5, 6mm.

Torsion quick release magnetic bit holder x 60mm.

**15
PIECES**



Order Code

KEN-573

-6460K

Service Set

1/4" hex. bit holders 1/4" and 3/8" square drive.

1/4" Hex 25mm Long:

TX: T6, 7, 8, 9, 10, 15, 20, 25, 27, 30 and 40.

Flat: 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 8 and 10mm.

Crosspoint: No. 0, 1, 2 and 3.

PZ: No. 1, 2 and 3.

1/4" Hex 38mm Long:

Flat: 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5 and 8mm.

1/4" Hex 50mm Long Ball Retainer Fitting:

Flat: 4, 5, 6, 8 and 10mm.

PZ: No. 1, 2 and 3.

Crosspoint: No. 0, 1, 2, 3 and 4.

1/4" Hex 50mm Long Plain Hex Shank:

Crosspoint: No. 1, 2 and 3.

PZ: No. 1, 2 and 3.

**64
PIECES**

1/4" Hex 60mm Long Double-Ended:

No.1 **Crosspoint** x 4.5mm **Flat**

No.1 **PZ** x 4.5mm **Flat**

No.2 **Crosspoint** x 5.5mm **Flat**

No.2 **PZ** x 5.5mm **Flat**

No.3 **Crosspoint** x 6.5mm **Flat**

No.3 **PZ** x 6.5mm **Flat**.



Order Code

KEN-573

-6500K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

HAND TOOLS

KENNEDY Ken-Grip Mechanic's Bit Set

Featuring Ken-Grip patented design sockets that grip fasteners that up to 95% rounded off and will not damage worn or rusted fasteners. Manufactured from Chrome Vanadium, they will fit a range of non-metric hexagons and E-Torx drive sizes. The screwdriver bits are manufactured from Chrome Molybdenum. Supplied in a moulded case.

Contents:

Metric sockets: 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 7mm, 8mm, 10mm, 11mm, 12mm, 13mm, 14mm.

Screwdriver bits: Crosspoint: No 1, No 2, No 3.

Pozidriv: No 1, No 2, No 3.

Torx: T5, T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40.

Slotted: 3.5, 4.5, 5.5, 6.5, 8.

Hexagon: 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8.

Tri-Wing: No 3, No 4, No 5.

Torq Set: TS.5, TS.6, TS.8, TS.10. **SIT:** No 10, No 20, No 25, No 30, No 40.

Accessories: 1/4" Square drive, 1/4" hex magnetic bit holder, Y adaptor for cup hook, Spinner handle.

Weight
each

Order Code
KEN-573

1.20kg

-6370K

**60
PIECES**

**Mechanic's Screwdriver Bit Set**

Crosspoint: No.1, No.2, No.3.

Pozidriv®: No.1, No.2 (x2), No.3.

Torx®: 6, 7, 8, 9, 10, 15, 20, 25, 27, 30, 40.

Slotted: 3, 3.5, 4, 4.5, 5, 5.5, 6.5, 8mm.

Spline: 5, 6, 8, 10mm.

1/4" hex x 60mm quick release magnetic bit holder.

1/4" square drive.

1/4" hex magnetic bit holder.

Supplied in a moulded case with a belt clip.

**32
PIECES**

Weight
each

Order Code
KEN-573

260g

-6320K

**Engineer's Screwdriver Bit Set**

Crosspoint: No.1, No.2, No.3.

Pozidriv®: No.1, No.2, No.3.

Torx®: 15, 20.

Slotted: 3.5, 4.5, 5, 5.5, 6.5, 8mm.

Hexagon: 2, 3, 4, 5, 6, 8, 10mm, 3/32", 1/8", 5/32", 3/16", 1/4", 5/16".

Square: 1, 2, 3.

1/4" hex x 60mm quick release magnetic bit holder.

1/4" square drive.

1/4" hex magnetic bit holder.

Supplied in a moulded case with a belt clip.

**32
PIECES**

Weight
each

Order Code
KEN-573

270g

-6300K

**Master Screwdriver Bit Set**

1/4" hex x 25mm insert bits. Manufactured from chrome molybdenum. Bit holder made from chrome vanadium hardened steel, tempered and chrome plated. Uniquely packaged in a moulded plastic case for easy organisation and storage.

**100
PIECES**

Crosspoint: No.0, No.1, No.2R, No.2, No.3, No.4.

Pozidriv®: No.0, No.1, No.2, No.3, No.4.

Square: 0, 1, 2, 3, 4.

Torx®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40, T45, T50.

Clutch: 3/32, 3/16, 1/4.

Hex: 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8, 10.

Slotted: 3, 3.5, 4.5, 5, 5.5, 6.5.

Crosspoint ACR II: No.1, No.2R, No.2, No.3.

Pozidriv® ACR: No.1, No.2, No.3.

Spline: 4, 5, 6, 8.

Torq®Set: 4, 5, 8, 10, 1/4".

Spanner: 4, 6, 8, 10, 12.

Torx® Tamper Resistant: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40.

Hex Tamper Resistant: 1.5, 2, 2.5, 3, 4, 5, 5.5, 6, 7, 8.

Tri-Wing: No.1, No.2, No.3, No.4, No.5.

1/4" square drive x 1/4" hex magnetic bit holder - 25mm.

1/4" hex x 1/4" hex magnetic bit holder - 60mm.

1/4" hex x 1/4" square drive socket adaptor - 25mm.

1/4" hex x 1/4" square drive socket adaptor - 50mm.

"Y" Adaptor for cup hook or screw eye.

Dimensions (H x W x D): 123 x 177 x 35mm.

Weight
each

Order Code
KEN-573

690g

-6350K





Impact Driver Sets

Industrial quality impact driver with switchable forward and reverse screwdriver rotation. When the impact resistant handle is struck with a hammer the downward force is converted by the impact driver's internal mechanism into a powerful high torque screwdriver rotation action. Ideal for ensuring fasteners are securely tightened and for freeing stuck fasteners. Hex drive nose pieces can be removed to allow use with 1/2" square drive impact sockets. Supplied in a moulded case.

14 Piece Set

To suit 5/16" hex, 3/8" and 1/2" square drives. **Complete with: Crosspoint:** No.1, 2, 3 and 4. **Flat Bits:** 6, 8, 10 and 12mm. **Hex Bits:** 4,5, 6 and 8mm.

**14
PIECES**



Weight each	Order Code
1.20kg	KEN-573 -7100K

40 Piece Impact Driver Set

1/2" square to 5/16" hexagon bit adaptor 1/2" square to 3/8" hexagon bit adaptor. **80mm x 3/8" Hexagon bits, Hexagon:** 8mm, 6mm. **TX:** Tx40, Tx45, Tx50, **Crosspoint:** No.2, No.3, **Slotted:** 8mm and 10mm. **35mm x 3/8" Hexagon bits, Hexagon:** 4mm, 5mm, 6mm, 7mm, 8mm. **TX:** Tx20, Tx25, Tx30, Tx40, Tx45, Tx50. **Crosspoint:** No.1, 2, 3 & 4. **Slotted:** 5mm, 6mm, 8mm, 10mm, 12mm. **30mm x 5/16" Hexagon bits, Hexagon:** 10mm, 12mm, **TX:** Tx55. **Spline:** 5mm, 6mm, 8mm, 10mm, and 12mm.

**40
PIECES**



Weight each	Order Code
1.20kg	KEN-573 -7140K

SCREWDRIVER BITS

**GROUP
573**



5 Piece Set

To suit 5/16" hex and 1/2" square drives. **Complete with: Crosspoint:** No.2 and 3. **Flat Bits:** 8 and 10mm.



**5
PIECES**



Weight each	Order Code
0.75kg	KEN-573 -7080K

Socket & Screwdriver Bit Set

Ken-Grip patented design sockets that grip fasteners that are up to 95% rounded off and will not damage worn or rusted fasteners. **Contents: Metric sockets:** 6mm, 7mm, 8mm, 10mm, 11mm, 12mm, 13mm. **Screwdriver bits: Slotted:** 4, 4.5, 6.5, 8, **Hexagon:** 3, 4, 5, 6. **Torx:** T8, T10, T15, T20, T25, T27, T30, T40. **Torx Temper:** TT10, TT15, TT20, TT25, TT27, TT30, TT40. **Crosspoint:** No 1, No 2, No 3. **Pozidriv:** No 1, No 2, No 3. **Accessories:** 1/4" x 60mm hex one touch adaptor, 1/4" x 25mm socket adaptor, 1/4" hex bit ratchet.

**39
PIECES**



Order Code	KEN-582 -7910K
Order Code	KEN-573 -9050K
Ratchet only	-9060K
One touch adapter only	-9060K

HAND TOOLS

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

503

Spark-resistant tools are used to eliminate the chances of accidental fires or explosions in potentially combustible or explosive environments. They resist the sparks that a standard tool could potentially create when striking hard surfaces. The use of spark resistant tools is essential in many industrial applications such as petroleum and chemical manufacturing, spray booth operations, the marine industry, the mining industry, the paper industries, or any location where flammable vapours or combustible residues are present.

Spark-resistant tools must be maintained with special care. Frequent cleaning/re-dressing to remove ferrous particles or contaminants, which may impair the spark-resistant properties, is essential.

Safe for use in high risk hazardous locations, Ideal for chemical, pharmaceutical, power, oil and gas and fire rescue.

For gases, vapours and mists the zone classifications are:

Zone 0 An atmosphere where a mixture of air and flammable substances in the form of gas, vapour or mist is present frequently, continuously or for long periods.

Zone 1 An atmosphere where a mixture of air and flammable substances in the form of gas, vapour or mist is likely to occur in normal operation occasionally.

Zone 2 An atmosphere where a mixture of air and flammable substances in the form of gas, vapour or mist is not likely to occur in normal operation but, if it does occur, will persist for only a short period.

For dusts the zone classifications are:

Zone 20 An atmosphere where a cloud of combustible dust in the air is present frequently, continuously or for long periods.

Zone 21 An atmosphere where a cloud of combustible dust in the air is likely to occur in normal operation occasionally.

Zone 22 An atmosphere where a cloud of combustible dust in the air is not likely to occur in normal operation but, if it does occur, will persist for only a short period.

Al-Br Aluminium
Bronze
are manufactured to
20-30HRC and offer a
breaking strain of
782 N/m - 989 N/m.

Be-Cu Beryllium
Copper
are manufactured to
30-40HRC and offer a
breaking strain of
1117 N/m - 1236 N/m.

Screwdrivers

Aluminium Bronze				
Tip Type	Size	Blade Length	Weight each	Order Code
CROSSPOINT	No.1	75	55g	-4520K
	No.2	100	60g	-4540K
	No.3	150	100g	-4560K
	No.4	200	120g	-4580K
PARALLEL	6.0mm	100	60g	-4020K
	6.0mm	150	80g	-4040K
	7.5mm	200	120g	-4060K
	9.0mm	250	180g	-4080K
	9.0mm	300	200g	-4100K

Beryllium Copper				
Tip Type	Size	Blade Length	Weight each	Order Code
CROSSPOINT	No.1	75	55g	-4420K
	No.2	100	60g	-4440K
	No.3	150	100g	-4460K
	No.4	200	120g	-4480K
PARALLEL	6.0mm	100	60g	-3960K
	6.0mm	150	80g	-3970K
	7.5mm	200	120g	-3980K
	9.0mm	250	180g	-3990K
	9.0mm	300	200g	-4000K

Long Nose Pliers

With side cutter, serrated jaws and safety grips.

Aluminium Bronze		
Overall Length	Weight each	Order Code
200mm (8")	155g	-3880K

Beryllium Copper		
Overall Length	Weight each	Order Code
200mm (8")	335g	-3870K

Groove Joint Pliers

Serrated jaws with sliding pivot joint which allows a wide range of jaw opening.

Aluminium Bronze			
Overall Length	Maximum Capacity	Weight each	Order Code
250mm	45mm	415g	-3900K

Beryllium Copper			
Overall Length	Maximum Capacity	Weight each	Order Code
250mm	45mm	325g	-3890K

Adjustable Combination Pliers

Serrated teeth with sliding pivot joint.
Overall length: 203mm (8").

Aluminium Bronze		
Overall Length	Weight each	Order Code
200mm (8")	335g	-3940K

Linesman Pliers

Serrated jaws for gripping nuts, bolts, studs etc. with side cutter and slip guard safety handles.

Aluminium Bronze		
Overall Length	Weight each	Order Code
150mm (6")	165g	-3800K
180mm (7")	310g	-3810K
200mm (8")	370g	-3820K

Beryllium Copper		
Overall Length	Weight each	Order Code
150mm (6")	180g	-3420K
180mm (7")	355g	-3440K
200mm (8")	465g	-3460K

Diagonal Cutting Nippers

The cutting edge is offset at a slight angle to allow close cuts to a flat surface. Slip guard safety handles.

Aluminium Bronze		
Overall Length	Weight each	Order Code
150mm (6")	190g	-3850K
200mm (8")	285g	-3860K

Beryllium Copper		
Overall Length	Weight each	Order Code
150mm (6")	245g	-3830K
200mm (8")	410g	-3840K

**KENNEDY PROFESSIONAL****Open End Slogging Wrenches**

With flat striking faces to allow hammer blows to be used to loosen or tighten stubborn fasteners.

**Al-Br****Aluminium Bronze**

Size	Overall Length	Weight each	Order Code KEN-575
24mm	165mm	275g	-6400K
27mm	175mm	350g	-6410K
30mm	185mm	470g	-6420K
32mm	195mm	535g	-6430K
36mm	210mm	780g	-6440K
41mm	225mm	965g	-6450K
46mm	240mm	1140g	-6460K
50mm	255mm	1445g	-6470K
55mm	270mm	1705g	-6480K
60mm	285mm	2015g	-6490K
65mm	305mm	3060g	-6500K
70mm	325mm	3620g	-6510K
75mm	345mm	3905g	-6520K

Beryllium Copper


Size	Overall Length	Weight each	Order Code KEN-575
24mm	165mm	245g	-6360K
27mm	175mm	335g	-6362K
30mm	185mm	435g	-6364K
36mm	210mm	800g	-6368K
41mm	225mm	955g	-6370K
46mm	240mm	1225g	-6372K
50mm	255mm	1560g	-6374K
55mm	270mm	1850g	-6376K
60mm	285mm	2190g	-6378K
65mm	305mm	3060g	-6380K
70mm	325mm	4030g	-6382K

Be-Cu**Single Open End Spanners****Al-Br****Aluminium Bronze**

Size	Overall Length	Weight each	Order Code KEN-575
10mm	103mm		-5020K
14mm	125mm		-5040K
17mm	143mm		-5060K
19mm	157mm		-5080K
24mm	195mm		-5100K
27mm	221mm		-5120K
30mm	258mm		-5140K
32mm	272mm		-5160K
36mm	300mm		-5180K

Beryllium Copper

Size	Overall Length	Weight each	Order Code KEN-575
27mm	221mm	285g	-4720K
30mm	258mm	320g	-4740K

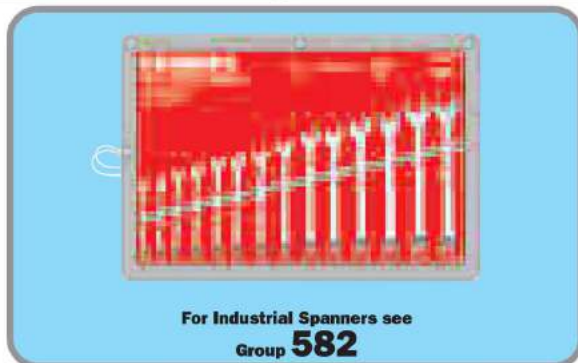Be-Cu

For Industrial Spanners see
Group 582

SAFETY TOOLS**GROUP 575****Ring End Slogging Wrenches**

With flat striking faces to allow hammer blows to be used to loosen or tighten stubborn fasteners.

**Al-Br****Aluminium Bronze**

Size	Overall Length	Weight each	Order Code KEN-575
24mm	140mm	250g	-6600K
27mm	150mm	350g	-6610K
30mm	165mm	460g	-6620K
32mm	180mm	610g	-6630K
36mm	210mm	780g	-6640K
41mm	225mm	985g	-6650K
46mm	245mm	1275g	-6660K
50mm	255mm	1545g	-6670K
55mm	265mm	1720g	-6680K
60mm	275mm	2080g	-6690K
65mm	290mm	2440g	-6700K
70mm	300mm	2735g	-6710K
75mm	315mm	3190g	-6720K
80mm	342mm	3320g	-6725K

Beryllium Copper

Size	Overall Length	Weight each	Order Code KEN-575
24mm	140mm	235g	-6800K
27mm	150mm	350g	-6810K
30mm	165mm	475g	-6820K
32mm	180mm	490g	-6825K
36mm	210mm	580g	-6830K
41mm	225mm	755g	-6840K
46mm	245mm	990g	-6850K
50mm	255mm	1145g	-6860K
55mm	265mm	1440g	-6870K
60mm	275mm	1620g	-6880K
65mm	290mm	1995g	-6890K

Be-Cu**Combination Spanners****Al-Br****Aluminium Bronze**

Size	Overall Length	Weight each	Order Code KEN-575
8mm	125mm	40g	-6020K
10mm	138mm	59g	-6040K
11mm	141mm	65g	-6060K
12mm	146mm	78g	-6080K
13mm	156mm	89g	-6100K
14mm	168mm	98g	-6120K
15mm	176mm	100g	-6140K
16mm	185mm	130g	-6160K
17mm	197mm	148g	-6180K
18mm	205mm	168g	-6200K
19mm	216mm	190g	-6220K
21mm	235mm	235g	-6240K
22mm	248mm	260g	-6260K
24mm	268mm	335g	-6280K
27mm	288mm	444g	-6300K
32mm	330mm	703g	-6320K
36mm	345mm	1002g	-6340K

Beryllium Copper

Size	Overall Length	Weight each	Order Code KEN-575
8mm	125mm	37g	-5620K
10mm	138mm	55g	-5640K
11mm	141mm	75g	-5660K
12mm	146mm	75g	-5680K
13mm	156mm	122g	-5700K
14mm	168mm	122g	-5720K
15mm	176mm	160g	-5740K
16mm	185mm	160g	-5760K
17mm	197mm	160g	-5780K
18mm	205mm	210g	-5800K
19mm	216mm	210g	-5820K
21mm	235mm	225g	-5840K
22mm	248mm	250g	-5860K
24mm	268mm	260g	-5880K
27mm	288mm	420g	-5900K
32mm	330mm	670g	-5920K
36mm	345mm	890g	-5940K

Be-Cu**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR****505**

© 2018

KENNEDY Pipe Wrenches

Serrated jaws with knurled adjusting nut.
Heavy Duty

**Aluminium Bronze**

Overall Length	Jaw Capacity	Weight each	Order Code KEN-575
250mm	30mm	0.80kg	-3580K
300mm	40mm	1.20kg	-3600K
350mm	50mm	1.55kg	-3620K
450mm	60mm	2.45kg	-3640K
600mm	75mm	3.65kg	-3660K

Al-Br**Beryllium Copper**

Overall Length	Jaw Capacity	Weight each	Order Code KEN-575
250mm	30mm	0.73kg	-3700K
300mm	40mm	1.05kg	-3720K
350mm	50mm	1.31kg	-3740K
450mm	60mm	2.25kg	-3760K
600mm	75mm	3.46kg	-3780K

Be-Cu**Adjustable Wrenches**

Smooth jaw adjustment with self-locking design which prevents the jaws opening unintentionally under load.

**Aluminium Bronze**

Overall Length	Opening Capacity	Weight each	Order Code KEN-575
150mm	18mm	120g	-1060K
200mm	24mm	255g	-1080K
250mm	30mm	410g	-1100K
300mm	36mm	655g	-1120K

Al-Br**Beryllium Copper**

Overall Length	Opening Capacity	Weight each	Order Code KEN-575
150mm	18mm	135g	-0860K
200mm	24mm	281g	-0880K
250mm	30mm	440g	-0900K
300mm	36mm	720g	-0920K

Be-Cu**Sliding T-Handles**

The sliding bar gives many options for leverage within a given space. Fitted with a spring-loaded ball bearing socket retainer.

**Aluminium Bronze**

Square Drive	Overall Length	Weight each	Order Code KEN-575
1/2"	250mm	310g	-7020K
3/4"	400mm	980g	-8020K

Al-Br**Speed Brace 1/2" Square Drive**

Revolving grip, ideal for nut spinning. Fitted with a spring-loaded ball bearing socket retainer.

**Aluminium Bronze**

Overall Length	Weight each	Order Code KEN-575
400mm	700g	-7080K

Al-Br**Sledge Hammers**


Spark-resistant sledge hammers with wooden handles.

**Al-Br****Aluminium Bronze**

Head Size	Length Capacity	Weight each	Order Code KEN-575
1.0kg	400mm (16")	1.30kg	-3200K
2.5kg	900mm (35")	3.41kg	-3240K
3.0kg	900mm (35")	3.91kg	-3260K
8.0kg	900mm (35")	8.91kg	-3300K

Ball Pein Hammers

For use with cold chisels, punches, rivets and for shaping metal. Fine grain hardwood shaft.

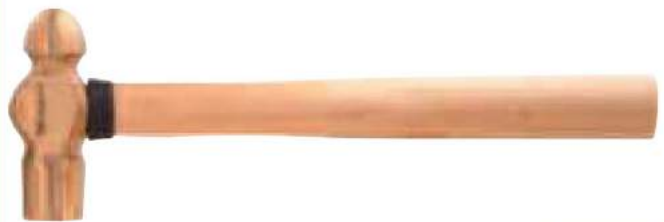**Al-Br****Aluminium Bronze**

Head Weight	Overall Length (mm)	Weight each	Order Code KEN-575
1lb	310	680g	-3020K
1 1/2lb	340	950g	-3040K
2lb	350	1205g	-3060K

Beryllium Copper

Head Weight	Overall Length (mm)	Weight each	Order Code KEN-575
1lb	310	680g	-2920K
1 1/2lb	340	950g	-2930K
2lb	350	1205g	-2940K

Be-Cu**Ratchet Handle**

Disc type adjustment with knurled grip and spring loaded ball bearing socket retainer.

**Al-Br****Aluminium Bronze**

Square Drive	Overall Length	Weight each	Order Code KEN-575
1/2"	245mm	615g	-7000K
3/4"	320mm	1430g	-8000K

Beryllium Copper

Square Drive	Overall Length	Weight each	Order Code KEN-575
1/2"	245mm	690g	-6960K

Be-Cu**1/2" Square Drive Swivel Handle**

The hinged link allows operation at varied angles to aid access in restricted areas. Fitted with a spring loaded ball bearing socket retainer.

**Al-Br****Aluminium Bronze**

Overall Length	Weight each	Order Code KEN-575
250mm	310g	-7100K



KENNEDY PROFESSIONAL Safety Extensions

Fitted with a spring-loaded ball bearing socket retainer.



Aluminium Bronze

Square Drive	Overall Length	Weight each	Order Code KEN-575
1/2"	125mm	230g	-7040K
1/2"	250mm	455g	-7060K
3/4"	200mm	870g	-8040K

Al-Br

Sockets

12 point bi-hexagon.



Aluminium Bronze

Size	Overall Length	Weight each	Order Code KEN-575
1/2" Drive			
10mm	40mm	71g	-7220K
11mm	40mm	72g	-7200K
12mm	40mm	72g	-7230K
13mm	40mm	73g	-7240K
14mm	40mm	73g	-7260K
17mm	40mm	80g	-7280K
19mm	42mm	100g	-7300K
21mm	43mm	125g	-7320K
22mm	43mm	130g	-7330K
24mm	43mm	170g	-7340K
27mm	43mm	215g	-7380K
30mm	46mm	260g	-7400K
32mm	46mm	290g	-7420K
3/4" Drive			
21mm	55mm	245g	-8220K
24mm	55mm	280g	-8240K
27mm	55mm	285g	-8260K
30mm	60mm	370g	-8280K
32mm	60mm	410g	-8300K
34mm	60mm	440g	-8320K
36mm	60mm	465g	-8340K
38mm	60mm	510g	-8360K
41mm	65mm	640g	-8380K
46mm	65mm	705g	-8400K
50mm	70mm	840g	-8420K

Al-Br

Impact Sockets

12-point, for additional torque grip.



Aluminium Bronze

Size	Overall Length	Weight each	Order Code KEN-575
3/4" Drive			
27mm	55mm	360g	-8530K
36mm	60mm	565g	-8560K
40mm	65mm	765g	-8580K
50mm	70mm	1003g	-8590K
1" Drive			
24mm	60mm	663g	-8820K
27mm	60mm	672g	-8830K
29mm	60mm	690g	-8840K
34mm	70mm	772g	-8870K
35mm	70mm	825g	-8880K
36mm	70mm	835g	-8890K
38mm	70mm	855g	-8900K

Al-Br

SAFETY TOOLS

GROUP
575

Universal Joint 1/2" Square Drive

Hinged through 180° in both directions for operation at varying angles. Fitted with a spring-loaded ball bearing socket retainer.



Aluminium Bronze

Overall Length	Weight each	Order Code KEN-575
50mm	170g	-7120K

Al-Br

1/2" Square Drive Socket Sets

Sockets: 10, 11, 12, 14, 17, 19, 22, 24, 27, 30 and 32mm.

Accessories: 250mm ratchet wrench, 250mm sliding T-handle, 400mm speed brace, 125 and 250mm socket extensions.

16
PIECES



Aluminium Bronze

Weight each	Order Code KEN-575
4.50kg	-7500K

Al-Br

Beryllium Copper

Weight each	Order Code KEN-575
6.73kg	-7460K

Be-Cu

3/4" Square Drive Socket Sets

Sockets: 21, 24, 27, 30, 32, 34, 36, 38, 41, 46 and 50mm.

Accessories: 320mm ratchet wrench, 400mm sliding T-handle, 200mm socket extension.

14
PIECES



Aluminium Bronze

Weight each	Order Code KEN-575
9.10kg	-8500K

Al-Br

Beryllium Copper

Weight each	Order Code KEN-575
13.24kg	-8460K

Be-Cu

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

507

GROUP
575

SAFETY TOOLS

KENNEDY PROFESSIONAL Square Shovel

Spark resistant shovel with square mouth, polypropylene 'YD' handle and wooden shaft.



Aluminium Bronze			
Blade Size	Overall Length	Weight each	Order Code KEN-575
235 x 185mm	950mm (37")	1.80kg	-9240K

Al-Br

Wrecking Bars

For general dismantling and stripping applications. V-notch for use on nails.



Aluminium Bronze			
Overall Length	Weight each	Order Code KEN-575	
400mm	685g	-2520K	Al-Br

Beryllium Copper

Overall Length	Weight each	Order Code KEN-575	
400mm	752g	-2400K	Be-Cu

Drift Punches

Tapered punch, used for the purpose of aligning holes between two structural members so that they can be fastened or bolted together.



Aluminium Bronze			
Size	Overall Length	Weight each	Order Code KEN-575
3mm	160mm (6")	290g	-1600K

Al-Br

Beryllium Copper

Size	Overall Length	Weight each	Order Code KEN-575	
3mm	160mm (6")	280g	-1560K	Be-Cu

Putty Knives

With a chisel point and bi-material handle.



Aluminium Bronze			
Blade Length	Blade Width	Overall Length	Order Code KEN-575
100mm (4")	25mm (1")	200mm (8")	-2740K

Al-Br

Beryllium Copper

Blade Length	Blade Width	Overall Length	Order Code KEN-575	
100mm (4")	25mm (1")	200mm (8")	-2760K	Be-Cu

Scrapers



Aluminium Bronze			
Blade Length	Blade Width	Overall Length	Order Code KEN-575
95mm (3 ³ / ₄ ")	75mm (3")	200mm (8")	-2860K

Al-Br

Beryllium Copper

Blade Length	Blade Width	Overall Length	Order Code KEN-575	
95mm (3 ³ / ₄ ")	75mm (3")	200mm (8")	-2880K	Be-Cu

Be-Cu



Wedges



Aluminium Bronze		
Dimensions	Weight each	Order Code KEN-575
80 x 13 x 6mm	25g	-0500K
135 x 50 x 18mm	497g	-0510K
150 x 25 x 13mm	205g	-0520K
180 x 32 x 13mm	305g	-0540K
180 x 50 x 19mm	700g	-0560K
200 x 50 x 13mm	500g	-0580K
200 x 30 x 30mm	1315g	-0600K
200 x 40 x 40mm	1200g	-0620K

Al-Br

Beryllium Copper

Beryllium Copper		
Dimensions	Weight each	Order Code KEN-575
80 x 13 x 6mm	25g	-0320K
135 x 50 x 18mm	497g	-0340K
150 x 25 x 13mm	205g	-0360K
180 x 32 x 13mm	305g	-0380K
180 x 50 x 19mm	700g	-0400K
200 x 50 x 13mm	540g	-0420K
200 x 30 x 30mm	740g	-0440K
200 x 40 x 40mm	1315g	-0460K

Be-Cu

Marking Tool

Double-ended spark resistant marking tool. Overall length: 190mm.



Aluminium Bronze		
Overall Length	Weight each	Order Code KEN-575
190mm (7 ¹ / ₂ ")	20g	-1800K

Al-Br

Chisel Cross

4-point spark resistant chisel with 20mm wide hexagon shaft. Length: 200mm.



Aluminium Bronze			
Size	Overall Length	Weight each	Order Code KEN-575
7mm	200mm (8")	290g	-2300K

Al-Br

Flat Cold Chisels



Aluminium Bronze			
Size (mm)	Overall Length (mm)	Weight each	Order Code KEN-575
14	160	160g	-2020K
16	160	210g	-2040K
18	200	345g	-2060K
20	200	430g	-2080K
20	300	645g	-2100K
25	240	800g	-2120K
25	300	1000g	-2140K
25	400	1360g	-2160K

Al-Br

Beryllium Copper

Beryllium Copper			
Size (mm)	Overall Length (mm)	Weight each	Order Code KEN-575
14	160	175g	-1860K
16	160	231g	-1880K
18	200	382g	-1900K
20	200	473g	-1920K
20	300	710g	-1940K
25	240	1042g	-1960K

Be-Cu

KENNEDY
QUALITY INDUSTRIAL TOOLING

Reversible Ratchet Podger Spanners

Chrome vanadium steel. Suitable for heavy duty construction applications. Ratchet action for use in confined spaces. Reversible head has two internal bi-hexagon sizes.



Size	Order Code KEN-580
13 & 17mm	-8430K
17 & 19mm	-8450K
19 & 24mm	-8460K
24 & 27mm	-8470K
27 & 30mm	-8480K
30 & 32mm	-8490K

Open End Podger Spanners

Designed to engage the nut from the side. Engages on two faces.



Size	Overall Length	Order Code KEN-580
17mm	220mm	-8510K
19mm	240mm	-8520K
24mm	280mm	-8530K
27mm	300mm	-8540K
30mm	320mm	-8550K
32mm	340mm	-8560K
36mm	355mm	-8570K
46mm	390mm	-8590K

Ring End Podger Spanners

Cranked handle assists with location of spanner on to fixings within a recess.



Size	Overall Length	Order Code KEN-580
17mm	275mm	-8710K
19mm	305mm	-8720K
24mm	345mm	-8730K
27mm	365mm	-8740K
30mm	400mm	-8750K
32mm	425mm	-8760K
36mm	460mm	-8770K
46mm	505mm	-8790K

Scaffolding Tools

Manufactured to surpass the performance test **BS2558: 1954**. The sockets locate directly onto the handle relieving stress on the rivet. All sockets are plated, hardened and stress relieved to ensure they retain their shape.

Double Ended Swing Over Spanner

Swingover handle spanner with a $\frac{7}{16}$ " Whitworth socket end and $\frac{1}{2}$ " socket end for use on fixings. Suitable for use with all popular scaffold fixings used in the UK.



Overall length: 320mm.
Bar diameter: 15mm.
Socket size: $\frac{7}{16}$ "W x $\frac{1}{2}$ "W.

Weight each	Order Code KEN-580
545g	-9040K

Spinner Head Spanner

The handle is produced from a one piece drop forging with a $\frac{7}{16}$ " and $\frac{1}{2}$ " Whitworth double ended socket for use on fixings. Features a taper podger end used to line up holes and manipulate fixings. Rotating socket offers a single tool for two fastener sizes.



Overall length: 245mm.
Socket size: $\frac{7}{16}$ "W x $\frac{1}{2}$ "W.

Weight each	Order Code KEN-580
490g	-9080K

Combination Podger Spanner

Swingover handle spanner with a $\frac{7}{16}$ " Whitworth socket end for use on fixings. Features a cranked taper square podger end for use on eyebolt and jacking collars.



Overall length: 295mm.
Bar diameter: 15mm.
Socket size: $\frac{7}{16}$ "W.

Weight each	Order Code KEN-580
430g	-9060K

Podger Hammer

Manufactured from a one piece forging. Features a hammer end and cranked round taper podger end used to line up holes and manipulate fixings.



Overall length: 275mm.
Bar diameter: 15mm.
Head diameter: 35mm.
Head length: 45mm.

Weight each	Order Code KEN-580
660g	-9100K

Scaffold Key

Manufactured with a hook end and cranked taper square podger end for aligning and tightening eyebolts, jacking collars and loop fixings, both ends are hardened and tempered to improve tool life.



Overall length: 305mm.
Bar diameter: 15mm.
Head width: 20mm.

Weight each	Order Code KEN-580
460g	-9070K

Single Ended Swing Over Spanners

Single ended swingover handle spanners. Available in $\frac{7}{16}$ " or $\frac{1}{2}$ " Whitworth socket end size for use on fixings.



Standard



Heavy Duty



Chunky

Size	Bar Dia.	Type	Order Code KEN-580
$\frac{7}{16}$ "	15mm	Standard	-9020K
$\frac{7}{16}$ "	15mm	Heavy Duty	-9010K
$\frac{7}{16}$ "	15mm	Chunky	-9050K
$\frac{1}{2}$ "	20mm	Standard	-9030K

HAND TOOLS

16mm Spigot End Fittings
 Open End


Size	Weight each	Order Code KEN-581
16mm Bore - Metric		
8mm	100g	-2810K
10mm	110g	-2820K
11mm	110g	-2830K
12mm	110g	-2840K
13mm	110g	-2850K
14mm	120g	-2860K
15mm	120g	-2870K
16mm	140g	-2880K
17mm	140g	-2890K
18mm	140g	-2900K
19mm	160g	-2910K
20mm	160g	-2920K
21mm	160g	-2930K
22mm	220g	-2940K
23mm	220g	-2950K
24mm	220g	-2960K
25mm	220g	-2970K
26mm	220g	-2980K
27mm	240g	-2990K
30mm	240g	-3000K
32mm	240g	-3010K
16mm Bore AF (Inch)		
3/8"	100g	-3500K
7/16"	110g	-3510K
1/2"	120g	-3520K
9/16"	120g	-3530K
5/8"	140g	-3540K
11/16"	140g	-3550K
3/4"	160g	-3560K
13/16"	220g	-3570K
7/8"	220g	-3580K
15/16"	220g	-3590K
1"	220g	-3600K
1 1/16"	240g	-3610K
1 1/8"	240g	-3620K
1 3/16"	240g	-3630K
1 1/4"	240g	-3640K

SPIGOT END FITTINGS/PIN SPANNERS
16mm Spigot End Fittings
 Ring End


Size	Weight each	Order Code KEN-581
16mm Bore - Metric		
8mm	100g	-4300K
10mm	100g	-4310K
11mm	100g	-4320K
12mm	100g	-4330K
13mm	110g	-4340K
14mm	110g	-4350K
15mm	120g	-4360K
16mm	120g	-4370K
17mm	120g	-4380K
18mm	120g	-4390K
19mm	130g	-4400K
21mm	130g	-4410K
22mm	170g	-4420K
24mm	160g	-4430K
27mm	150g	-4440K
16mm Bore AF (Inch)		
3/8"	100g	-4450K
1/2"	100g	-4460K
9/16"	100g	-4470K

16mm Spigot Drives


Square Drive	Weight each	Order Code KEN-581
Reversible Ratchet Head		
3/8"	190g	-5550K
Push-Through Square Drive Head		
1/2"	290g	-5900K

22mm Spigot End Fittings
 Open End


Size	Weight each	Order Code KEN-581
22mm Bore - Metric		
30mm	360g	-4000K
32mm	370g	-4010K
36mm	390g	-4020K
41mm	530g	-4030K
46mm	530g	-4040K

22mm Spigot End Fittings
 Ring End


Size	Weight each	Order Code KEN-581
22mm Bore - Metric		
22mm	310g	-5000K
24mm	320g	-5010K
27mm	330g	-5020K
30mm	350g	-5030K
32mm	440g	-5040K
36mm	400g	-5050K
41mm	560g	-5060K
46mm	490g	-5070K

Flare End


Size	Weight each	Order Code KEN-581
16mm Bore - Metric		
10mm	100g	-5200K
11mm	100g	-5210K
13mm	110g	-5220K
14mm	110g	-5230K
16mm	120g	-5240K
17mm	110g	-5250K
18mm	120g	-5260K
19mm	120g	-5270K
21mm	120g	-5280K
22mm	120g	-5290K
24mm	120g	-5300K
27mm	130g	-5310K

HAND TOOLS
Adjustable Pin Wrench

Forged in chrome vanadium steel, the wrench is adjusted by turning the centre screw. It can be used on nuts with bolts bored on the face and is supplied with 8 interchangeable pins which are double round ended for nuts with top holes.



Description	Capacity	Order Code KEN-581
Adjustable Pin Wrench	20-100mm	-1300K
	2.5-4mm	-1350K
Pins to Suit	6-8mm	-1360K
	3-5mm	-1370K
	7-9mm	-1380K


PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

GROUP 581/582 SPANNERS - BOX/COMBINATION



KENNEDY Box Spanners
QUALITY INDUSTRIAL TOOLING


Manufactured from high quality steel tube. Zinc plated for corrosion resistance, each supplied with tommy bar.



YAMOTO Double Ratchet Combination Spanners



Available in a range of sizes (8mm-19mm), these combination spanners are made of chrome vanadium steel and have an innovative ratcheting open-end design. The 72-teeth ratcheting system needs only 5° movement to operate ratchet and the spanners are ideal for use in confined spaces. The chrome plated mirror finish prevents oil and dirt from adhering to the tool, making for easier cleaning and preventing rust. Conform to **ASME B107.100-2010**.

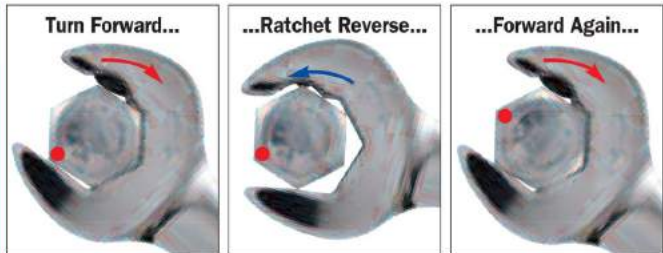

HAND TOOLS

Metric

Size	Length (mm)	Weight each	Order Code KEN-581
6 x 7	102	40g	-1060K
8 x 9	105	60g	-1080K
10 x 11	103	70g	-1100K
12 x 13	102	80g	-1120K
14 x 15	125	140g	-1140K
16 x 17	127	175g	-1160K
18 x 19	130	190g	-1180K
20 x 21	127	190g	-1200K
22 x 23	150	415g	-1220K
24 x 25	150	420g	-1240K
26 x 27	150	425g	-1270K

AF


Size	Length (mm)	Weight each	Order Code KEN-581
1/4" x 5/16"	103	60g	-1530K
5/16" x 3/8"	100	60g	-1550K
3/8" x 7/16"	100	60g	-1560K
1/2" x 9/16"	125	145g	-1580K
9/16" x 5/8"	127	150g	-1600K
11/16" x 3/4"	125	185g	-1630K

Sets

7 Piece Metric: 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.

6 Piece AF: 1/4" x 5/16", 5/16" x 3/8", 3/8" x 7/16", 1/2" x 9/16", 9/16" x 5/8" and 11/16" x 3/4".

6 Piece BA: 0 x 1, 2 x 3, 4 x 5, 6 x 7, 8 x 9, 10BA.

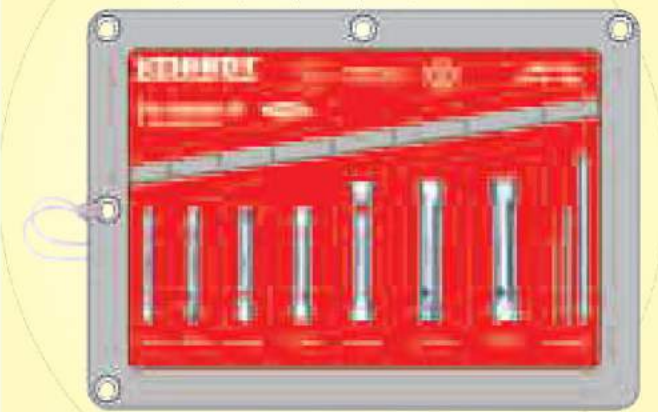

Number of Pieces	Weight each	Order Code KEN-581
7 Metric	600g	-1450K
6 Inch	475g	-1950K
6 BA	175g	-2350K

Metric

Size (mm)	Overall Length	Weight each	Order Code YMT-582
8	140	36g	-0340K
9	150	50g	-0350K
10	160	57g	-0360K
11	165	64g	-0370K
12	170	76g	-0380K
13	180	101g	-0390K
14	190	119g	-0400K
15	200	125g	-0410K
16	205	170g	-0420K
17	230	188g	-0430K
18	235	200g	-0440K
19	250	228g	-0450K

Set

8 Piece Metric:

8, 10, 12, 13, 14, 15, 17 and 19mm.



Order Code
YMT-582
-0490K



KENNEDY PROFESSIONAL Professional Ratchet Combination Spanners

Chrome vanadium steel with mirror polish finish, preventing oil and dirt from adhering to the spanner, making for easier cleaning and preventing rust. 72-teeth ratcheting system which needs only 5° movement to operate ratchet. Thin wall design for greater access. Conform to **ASME B107.6**.



Metric

Size (mm)	Overall Length	Weight each	Order Code KEN-582
8	135	38g	-2158K
10	155	65g	-2160K
11	160	75g	-2162K
12	172	85g	-2164K
13	180	95g	-2166K
14	190	115g	-2168K
15	200	135g	-2170K
16	215	155g	-2172K
17	230	200g	-2174K
18	240	210g	-2175K
19	245	235g	-2176K
21	285	350g	-2177K
22	285	340g	-2178K
24	325	475g	-2179K
25	325	480g	-2252K
26	325	465g	-2253K
27	355	600g	-2254K
28	360	600g	-2255K
30	420	918g	-2257K
32	425	880g	-2259K

AF

Size (AF)	Overall Length	Weight each	Order Code KEN-582
3/8"	160	60g	-2144K
7/16"	168	70g	-2146K
1/2"	179	90g	-2148K
9/16"	198	115g	-2150K
5/8"	214	150g	-2152K
11/16"	232	185g	-2154K
3/4"	250	225g	-2156K

Set

9 Piece Metric: 10, 11, 12, 13, 14, 15, 16, 17 and 19mm.
7 Piece AF: 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4".



Number of Pieces	Weight each	Order Code KEN-582
9 Metric	2560g	-3990K
7 AF	2150g	-2230K

Ratchet Combination Spanner Set with Sockets

RCS23M - 4 in 1: This wrench set for 10 to 19mm applications comprises open ended wrenches, ratchet ring wrenches, Go-Thru™ single hex ratchet wrenches and 1/4", 3/8" and 1/2" square drive ratchets. All are made from chrome vanadium and are fully plated with a mirror finish. Supplied in a heavy duty fitted metal storage case with locking lid and carry handle.

**23
PIECES**



Ratchet Combination Spanner Set with Sockets

Number of Pieces	Weight each	Order Code KEN-582
23	3,00kg	-3980K

Square Drive Adaptors

Size	Order Code KEN-582
1/4" SD (x10mm hex)	-4210K
3/8" SD (x13mm hex)	-5195K
1/2" SD (x19mm hex)	-6705K

4-in-1 Spanner

Ratchet Ring Spanner		Ratchet for use with Go-Thru™ Sockets (supplied)	
Open ended spanner		Square Drive Ratchet for use with standard Sockets	

Go-Thru™ Sockets

Size	Order Code KEN-582
10mm	-3740K
11mm	-3741K
12mm	-3742K
13mm	-3743K
14mm	-3744K
15mm	-3745K
16mm	-3746K
17mm	-3747K
18mm	-3748K
19mm	-3749K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



Professional Reversible Combination Spanners

Bi-hexagonal 15° offset rings with a 72 teeth lever ratcheting system that requires only 5 degree movement to operate, making them ideal for use in tight areas. Made from high quality Chrome Vanadium Steel with mirror polish finish to prevent oil and dirt from adhering to the spanner. Conform to **ASME B107.6**.



'Flush' fitted reversible switch enables the wrench to move in either direction without sacrificing the overall compact surface of the box end.



Set
9 Piece Metric: 10, 11, 12, 13, 14, 15, 16, 17 and 19mm.



9
PIECES

Metric			
Size (mm)	Overall Length	Weight each	Order Code
8	135	32g	-6808K
10	155	56g	-6810K
11	160	68g	-6811K
12	172	78g	-6812K
13	180	96g	-6813K
14	190	116g	-6814K
15	200	136g	-6815K
16	215	160g	-6816K
17	230	182g	-6817K
18	240	200g	-6818K
19	245	248g	-6819K
21	285	540g	-6821K
22	285	540g	-6822K
24	325	710g	-6824K

Number of Pieces	Weight each	Order Code
9 Metric	1.2kg	KEN-582 -6796K

HAND TOOLS

Professional Flex-Head Ratchet Combination Spanners

Chrome vanadium steel with mirror polish finish, preventing oil and dirt from adhering to the spanner, making for easier cleaning and preventing rust. 72-teeth ratcheting system which needs only 5° movement to operate ratchet. Thin wall design for greater access. Head flexes up to 90° in either direction. Conform to **ASME B107.6**.



Set (right) contains spanners and ratchet units which combine to make a set of square drive ratchets for use with standard sockets (supplied separately)



Flex-Head Ratchet Combination Spanner Set With Adaptors

Contains:
Flex head ratchet combination spanners: 10, 11, 12, 13, 14, 15, 16, 17 and 19mm.
Quick release square drive adaptors - 1/4" SD (x10mm hex); 3/8" SD (x13mm hex); 1/2" SD (x19mm hex).

Supplied in a heavy duty fitted storage case.



Metric Ratchet Combination Spanners			
Size (mm)	Overall Length	Weight each	Order Code
10	160mm	58g	-2240K
11	168mm	80g	-2241K
12	179mm	90g	-2242K
13	180mm	105g	-2243K
14	192mm	130g	-2244K
15	200mm	152g	-2245K
16	215mm	182g	-2246K
17	233mm	213g	-2247K
18	237mm	230g	-2248K
19	249mm	271g	-2249K

Number of Pieces	Weight each	Order Code
10 Metric	2600g	KEN-582 -2250K

**KENNEDY PROFESSIONAL****Short Arm Ratchet Combination Spanners**

Manufactured from quality chrome vanadium steel with hardened jaws and high polish mirror finish, corrosion resistant and easy to clean. Conforms to **ANSI 8107.6**.

SPANNERS - COMBINATION**GROUP 582****Sets****9 Piece Metric:**

10, 11, 12, 13, 14, 15, 16, 17 and 19mm.

7 Piece AF:


3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4".

Metric

Size (mm)	Overall Length	Weight each	Order Code KEN-582
10	95	40g	-2188K
11	100	50g	-2189K
12	103	55g	-2190K
13	106	60g	-2191K
14	114	75g	-2192K
15	117	90g	-2193K
16	120	100g	-2194K
17	127	120g	-2195K
19	138	155g	-2197K

AF

Size Inch	Overall Length	Weight each	Order Code KEN-582
3/8"	97	45g	-2180K
7/16"	113	85g	-2181K
1/2"	108	70g	-2182K
9/16"	114	85g	-2183K
5/8"	120	110g	-2184K
11/16"	127	120g	-2185K
3/4"	135	155g	-2186K

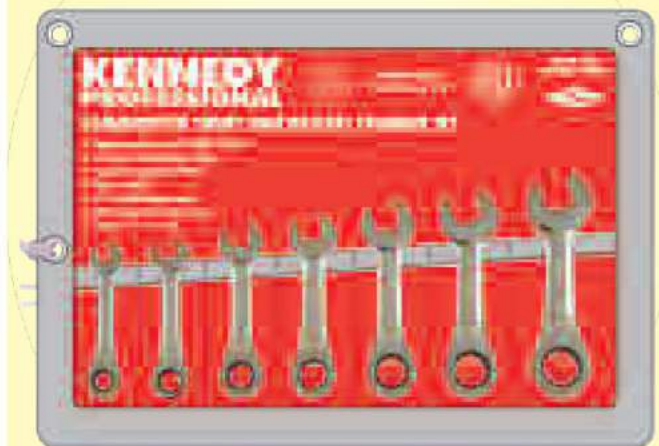


Number of Pieces	Weight each	Order Code KEN-582
9 Metric	1880g	-2236K
7 AF	770g	-2228K

HAND TOOLS**Short Arm Combination Spanners**

Manufactured from quality chrome vanadium steel with hardened jaws and high polish mirror finish, corrosion-resistant and easy to clean. The jaws and ring are offset at 15° for easier location and application of torque to the fastener. Suitable for use in areas of very restricted access. Conforms to **ASME B107.6**.

**WALL DRIVE****Set****10 Piece Metric:**

10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm.

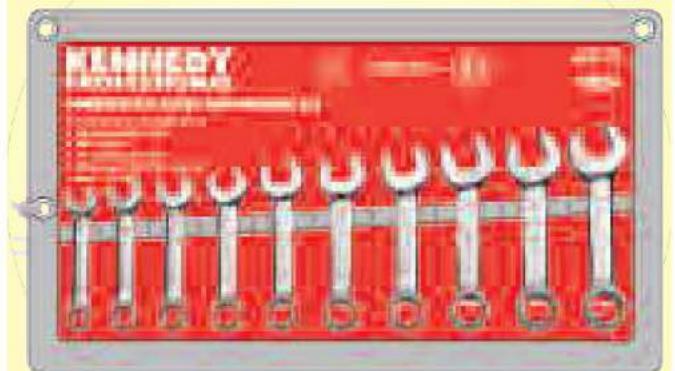**10
PIECES**

Weight each	Order Code KEN-582
840g	-2225K

Metric

Size (mm)	Overall Length	Weight each	Order Code KEN-582
10	97	30g	-2200K
11	100	40g	-2202K
12	105	43g	-2204K
13	110	51g	-2206K
14	114	65g	-2208K
15	119	75g	-2210K
16	124	85g	-2212K
17	130	95g	-2214K
18	133	110g	-2216K
19	140	130g	-2218K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**515**

Wall Drive Ring End Feature

The wall drive ring end feature has no points on the internal bi-hexagon ring end. This is achieved by a series of radii that gives a wavy look to the internal bi-hexagon ring end.

The internal radii design promotes the use of higher torque loads to be applied to the fastener through increased surface contact areas.




Fig.1

Fig.1 shows the point loads that occur with standard contact wrenches.

Fig.2 shows the increased surface contact area loads of wrenches with wall drive feature.

The increased contact surface area has three main advantages: helps to reduce stress to the tool, prolonging tool life. Increases the tightening torque transmission force that can be applied to fasteners. Prevents fastener damage, e.g. 'rounding off'.



Fig.2

KENNEDY PROFESSIONAL Professional Combination Spanners

Manufactured from chrome vanadium steel with highly polished mirror finish. Mirror finish prevents oil and dirt from adhering to the spanner making for easier cleaning and preventing rust. Long reach, wall drive. Conform with **ASME B107.6**.



HAND TOOLS

Metric Size (mm)	Overall Length	Weight each	Order Code KEN-582
6	130	26g	-3060K
7	136	30g	-3070K
8	148	35g	-3080K
9	167	53g	-3090K
10	172	57g	-3100K
11	186	70g	-3110K
12	197	80g	-3120K
13	207	88g	-3130K
14	223	119g	-3140K
15	233	133g	-3150K
16	243	145g	-3160K
17	261	179g	-3170K
18	270	199g	-3180K
19	280	220g	-3190K
20	290	323g	-3200K
21	301	323g	-3210K
22	318	361g	-3220K
23	325	400g	-3225K
24	338	443g	-3230K
25	350	540g	-3231K
26	350	525g	-3232K
27	370	610g	-3233K
28	370	585g	-3234K
29	400	715g	-3235K
30	400	735g	-3236K
32	430	915g	-3237K

AF Size (AF)	Overall Length	Weight each	Order Code KEN-582
1 1/32"	143	32g	-3239K
1/4"	130	26g	-3240K
5/16"	148	35g	-3250K
3/8"	167	53g	-3260K
7/16"	186	70g	-3270K
1/2"	207	88g	-3280K
9/16"	223	119g	-3290K
5/8"	243	145g	-3300K
11/16"	261	179g	-3310K
3/4"	280	220g	-3320K
13/16"	297	296g	-3330K
7/8"	320	350g	-3340K
15/16"	340	435g	-3350K
1"	355	510g	-3360K

Sets

14 Piece Metric: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm.


14* Piece Metric: 6, 8, 9, 10, 13, 14, 15, 17, 19, 22, 24, 27, 30 and 32mm.

18 Piece Metric: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, and 24mm.

26 Piece Metric: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30 and 32mm.

9 Piece AF: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4".

13 Piece AF: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16" and 1".

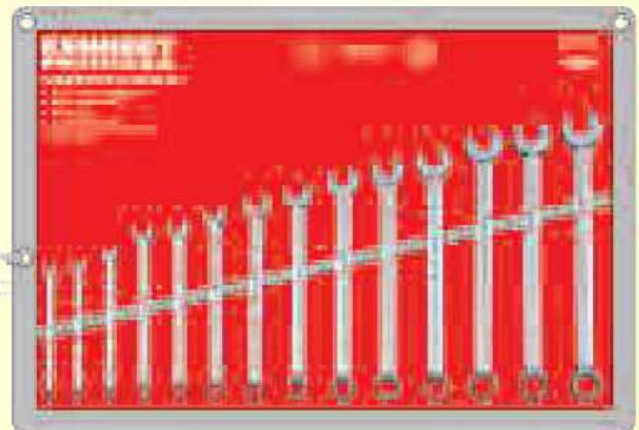

Number of Pieces	Weight each	Order Code KEN-582
14 Metric	1.65kg	-3960K
14* Metric	4.60kg	-3972K
18 Metric	2.85kg	-3970K
26 Metric	8.90kg	-3974K
9 AF	1.00kg	-3920K
13 AF	1.95kg	-3930K



Manufactured from chrome vanadium steel with a satin finish body and highly polished heads. 15° open jaw angle to shank and ring end offset. Conform to: 5.5mm - 25mm, 1/4" - 1" AF - **DIN 3113**. 26mm - 95mm, 1 1/16" - 2" AF - **ASME B107.6**. 1/8" - 1/2" Whitworth - **DIN 3113 & BS192:1982**. 9/16" - 7/8" Whitworth - **ASME B107.6 & BS192:1982**.

Metric

Size (mm)	Overall Length	Weight each	Order Code KEN-582
5.5	93	10g	-2560K
6	100	14g	-2570K
7	110	18g	-2580K
8	120	27g	-2590K
9	130	33g	-2600K
10	140	36g	-2610K
11	150	47g	-2630K
12	160	55g	-2640K
13	170	66g	-2660K
14	180	82g	-2670K
15	190	90g	-2680K
16	200	107g	-2690K
17	210	130g	-2700K
18	220	138g	-2710K
19	230	159g	-2720K
20	240	185g	-2730K
21	250	193g	-2740K
22	260	225g	-2750K
23	260	265g	-2760K
24	280	294g	-2770K
25	295	330g	-2780K
26	295	435g	-2790K
27	310	387g	-2800K
28	340	675g	-2810K
29	340	1280g	-2850K
30	340	675g	-2820K
32	360	485g	-2830K
36	410	600g	-2840K
38	430	1280g	-2860K
41	460	1800g	-2870K
46	500	1900g	-2880K
50	540	2350g	-2890K
55	560	3085g	-2891K
60	600	3750g	-2892K
65	675	5700g	-2893K
70	675	5400g	-2894K
75	720	5700g	-2895K
80	720	6500g	-2896K
85	730	6800g	-2897K
90	730	7000g	-2898K
95	750	7200g	-2899K

Manufactured from chrome vanadium steel (except * which is made from drop forged carbon steel) with a satin finish body and highly polished heads.


AF

Size (AF)	Overall Length	Weight each	Order Code KEN-582
1/4"	100	14g	-2260K
5/16"	120	27g	-2270K
3/8"	140	33g	-2280K
7/16"	150	47g	-2290K
1/2"	170	66g	-2300K
9/16"	180	82g	-2310K
5/8"	200	107g	-2320K
11/16"	210	138g	-2340K
3/4"	230	159g	-2350K
7/8"	260	225g	-2360K
13/16"	250	268g	-2370K
15/16"	280	294g	-2380K
1"	295	330g	-2390K
1 1/16"*	358	540g	-2400K
1 1/8"*	380	675g	-2410K
1 1/4"*	418	820g	-2420K
1 5/16"*	461	972g	-2430K
1 3/8"*	461	972g	-2440K
1 7/16"*	486	1280g	-2450K
1 1/2"*	486	1280g	-2460K
1 5/8"*	540	1800g	-2470K
1 3/4"*	611	1900g	-2480K
1 7/8"*	611	2350g	-2490K
2"*	611	2350g	-2500K

Sets

Number of Pieces	Weight each	Order Code KEN-582
11 Metric	2.60kg	-2980K
14 Metric	3.10kg	-2900K
14* Metric	1.20kg	-2960K
18 Metric	2.20kg	-2970K
26 Metric	5.75kg	-2910K
9 AF	0.80kg	-2920K
11 AF	2.65kg	-2940K
12 AF	1.80kg	-2930K
7 Whitworth	0.95kg	-2950K

Whitworth

Size Whit	Overall Length	Weight each	Order Code KEN-582
1/8"	140	30g	-3370K
3/16"	160	50g	-3380K
1/4"	180	65g	-3390K
5/16"	200	97g	-3400K
3/8"	220	150g	-3410K
7/16"	250	200g	-3420K
1/2"	280	228g	-3430K
9/16"*	332	430g	-3440K
5/8"	380	690g	-3450K
11/16"*	418	885g	-3460K
3/4"*	461	850g	-3470K
7/8"*	486	930g	-3480K

Sets:

11 Piece: 26, 27, 28, 29, 30, 32, 36, 38, 41, 46 and 50mm
14 Piece: 6, 8, 9, 10, 13, 14, 15, 17, 19, 22, 24, 27, 30 and 32mm.
14* Piece: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm.
18 Piece: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 and 24mm.
26 Piece: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30 and 32mm.
9 Piece AF: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4"
11 Piece AF: *1 1/16", *1 1/8", *1 1/4", *1 5/16", *1 3/8", *1 7/16", *1 1/2", *1 5/8", *1 3/4", *1 7/8" and *2".
12 Piece AF: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 7/8", 15/16" and 1".
7 Piece Whitworth: 1/8", 3/16", 1/4", 5/16", 3/8", 7/16" and 1/2".

Industrial Offset Combination Spanners


Chrome vanadium steel. 15° cranked open end. Offset ring end. Up to 25% longer than conventional **DIN 3113** combination spanners. Conform to **DIN 3113B**.


Metric

Size (mm)	Overall Length	Weight each	Order Code KEN-582
6	127	20g	-3880K
7	135	25g	-3881K
8	145	35g	-3882K
9	155	40g	-3883K
10	167	50g	-3884K
11	173	55g	-3885K
12	180	65g	-3886K
13	195	80g	-3887K
14	210	95g	-3888K
15	215	110g	-3889K
16	230	135g	-3890K
17	240	160g	-3891K
18	255	170g	-3892K
19	265	190g	-3893K
21	280	240g	-3894K
22	300	275g	-3895K
24	320	350g	-3896K
27	340	565g	-3897K
30	360	665g	-3878K
32	380	821g	-3879K

Set

14 Piece Metric: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, and 19mm.

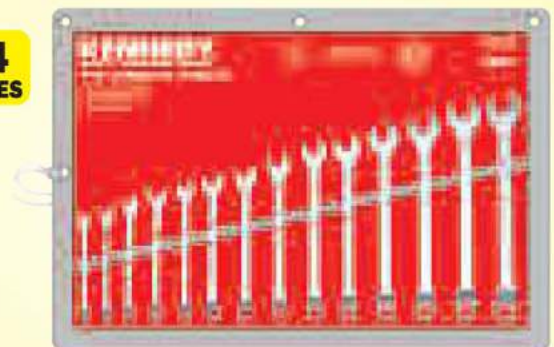**14
PIECES**

 Weight each
1.50kg

 Order Code
KEN-582
-3898K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

**GROUP
582**

SPANNERS - COMBINATION

**YAMOTO Industrial Combination
Spanners**

Made from fully polished chrome vanadium steel with a 15° offset.
Conform to **DIN 3113**.



Size (mm)	Overall Length	Weight each	Order Code YMT-582	Size (mm)	Overall Length	Weight each	Order Code YMT-582
6	100	14g	-3060K	19	230	159g	-3190K
7	110	18g	-3070K	20	240	185g	-3200K
8	120	27g	-3080K	21	250	193g	-3210K
9	130	33g	-3090K	22	260	225g	-3220K
10	140	36g	-3100K	23	260	265g	-3225K
11	150	47g	-3110K	24	280	294g	-3230K
12	160	55g	-3120K	25	295	330g	-3231K
13	170	66g	-3130K	26	295	435g	-3232K
14	180	82g	-3140K	27	310	387g	-3233K
15	190	90g	-3150K	28	340	675g	-3234K
16	200	107g	-3160K	30	340	675g	-3236K
17	210	130g	-3170K	32	360	485g	-3237K
18	220	138g	-3180K				

Sets
14 Piece: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm.
25 Piece: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30 and 32mm.



Number of Pieces	Weight each	Order Code YMT-582
14 Metric	3.10kg	-3960K
25 Metric	5.75kg	-3974K

HAND TOOLS

SENATOR QUALITY TOOLING **Combination Spanners**

Manufactured from forged chrome vanadium steel with satin finish and 15° cranked heads. Conform to **DIN 3113**.



Size (mm)	Overall Length	Weight each	Order Code SEN-582	Size (mm)	Overall Length	Weight each	Order Code SEN-582
6	100	14g	-4100K	19	230	159g	-4230K
7	110	18g	-4110K	20	240	185g	-4240K
8	120	27g	-4120K	21	250	193g	-4250K
9	130	33g	-4130K	22	260	225g	-4260K
10	140	36g	-4140K	23	260	265g	-4270K
11	150	47g	-4150K	24	280	294g	-4280K
12	160	55g	-4160K	25	295	330g	-4290K
13	170	66g	-4170K	26	295	435g	-4300K
14	180	82g	-4180K	27	310	387g	-4310K
15	190	90g	-4190K	28	340	675g	-4320K
16	200	107g	-4200K	30	340	675g	-4330K
17	210	130g	-4210K	32	360	485g	-4340K
18	220	138g	-4220K				

Sets
14 Piece: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm.
25 Piece: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30 and 32mm.



Number of Pieces	Weight each	Order Code SEN-582
14 Metric	3.10kg	-4510K
25 Metric	5.75kg	-4600K

KENNEDY PROFESSIONAL **E-Torx® Ring Spanners**


Manufactured from drop forged chrome vanadium steel. Polished finish. Set is supplied in wallet with hanging holes.



Size	Weight each	Order Code KEN-582
E6 x E8	16g	-1200K
E10 x E12	38g	-1210K
E14 x E18	81g	-1220K
E20 x E24	156g	-1230K

Set
4 Piece E-Torx: E6 x E8, E10 x E12, E14 x E18 and E20 x E24mm

**4
PIECES**

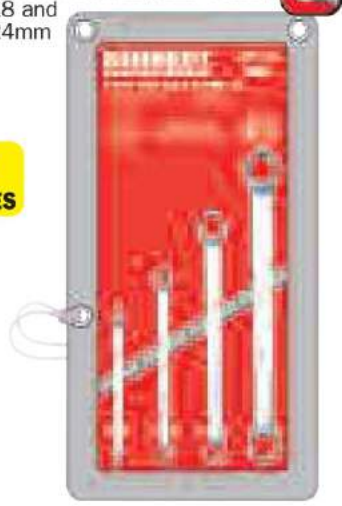

Weight each	Order Code KEN-582
440g	-1240K

KENNEDY PROFESSIONAL 12-In-1 Reversible Ratchet Spanners

Double ended ratchet spanners with 12 sizes each. These spanners fit mm, inch and E-TORX fasteners saving space and weight in the toolbox. The 72 teeth lever ratcheting system requires only 5 degree movement to operate making them ideal for use in tight areas. Made from high quality chrome vanadium steel with mirror polish finish to prevent oil and dirt from adhering to the spanner.




Sizes (Per Spanner):

8, 10, 11 & 13mm/ $5/16$ " $3/8$ " $7/16$ " & $1/2$ "/E10, E12, E14 & E16
14, 16, 17 & 19mm/ $9/16$ " $5/8$ " $11/16$ " $3/4$ "/E18, E20, E22 & E24

Metric

Size Range (mm)	Overall Length	Weight each	Order Code KEN-582
8 - 13	160	97g	-6862K
14 - 19	230	263g	-6864K

2 Piece Set: One of each as above

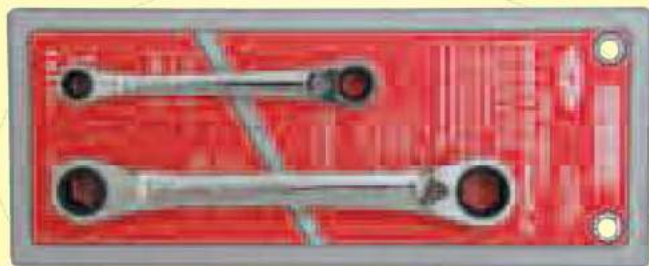


Number of Pieces	Weight each	Order Code KEN-582
2	380g	-6870K

4-In-1 Reversible Ratchet Spanners

Double ended ratchet spanners with 4 sizes each, saving space and weight in the toolbox. 72 teeth lever ratcheting system that requires only 5° movement to operate, making them ideal for use in tight areas. Made from high quality chrome vanadium steel with mirror polish finish to prevent oil and dirt from adhering to the spanner.



'Flush' fitted reversible switch enables the wrench to move in either direction without sacrificing the overall compact surface of the box end.



Metric


Size Range (mm)	Overall Length	Weight each	Order Code KEN-582
8 - 13	160	97g	-6852K
9 - 15	180	125g	-6854K
16 - 19	230	263g	-6856K

3 Piece Set

The most commonly used 12 sizes in just three spanners, 8 - 19mm. Supplied with storage roll.

Sizes (per spanner):

8, 10, 12 & 13mm.
9, 11, 14 & 15mm.
16, 17, 18 & 19mm.

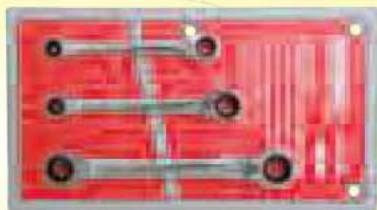

Number of Pieces	Weight each	Order Code KEN-582
3 Metric	510g	-6860K

KENNEDY QUALITY INDUSTRIAL TOOLS Reversible Ratchet Ring Wrenches

For use where access is limited. With a built-in ratchet mechanism to provide speed and a reversible action which can be achieved by depressing the reversing lever or by simply turning the wrench over. All ratcheting ring wrenches are manufactured from chrome vanadium steel bi-hex rings.

Straight



Metric

Size (mm)	Overall Length	Weight each	Order Code KEN-582
6* x 7*	115	65g	-9720K
8 x 9	135	80g	-9721K
10 x 11	140	90g	-9722K
12 x 13	175	170g	-9723K
14 x 15	210	270g	-9724K
17 x 19	210	260g	-9725K
21 x 22	240	305g	-9726K

*Single hexagon


AF

Size (AF)	Weight each	Order Code KEN-582
$1/4$ " x $5/16$ "	60g	-9732K
$3/8$ " x $7/16$ "	90g	-9733K
$1/2$ " x $9/16$ "	160g	-9734K
$5/8$ " x $11/16$ "	270g	-9735K
$3/4$ " x $7/8$ "	305g	-9736K

Sets

7 Piece Metric: 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 17 x 19 and 21 x 22mm

5 Piece AF: $1/4$ " x $5/16$ ", $3/8$ " x $7/16$ ", $1/2$ " x $9/16$ ", $5/8$ " x $11/16$ " and $3/4$ " x $7/8$ "



Number of Pieces	Weight each	Order Code KEN-582
7 Metric	1300g	-9730K
5 AF	930g	-9740K

25° Offset



Metric

Size (mm)	Overall Length	Weight each	Order Code KEN-582
6* x 7*	115	65g	-9742K
8 x 9	135	80g	-9743K
10 x 11	140	90g	-9744K
12 x 13	175	165g	-9745K
14 x 15	210	260g	-9746K
17 x 19	205	250g	-9747K
21 x 22	235	310g	-9748K

*Single hexagon

AF

Size (AF)	Weight each	Order Code KEN-582
$1/4$ " x $5/16$ "	60g	-9752K
$3/8$ " x $7/16$ "	90g	-9753K
$1/2$ " x $9/16$ "	170g	-9754K
$5/8$ " x $11/16$ "	265g	-9755K
$3/4$ " x $7/8$ "	300g	-9756K

Sets Contents:

7 Piece Metric: 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 17 x 19 and 21 x 22mm.

5 Piece AF: $1/4$ " x $5/16$ ", $3/8$ " x $7/16$ ", $1/2$ " x $9/16$ ", $5/8$ " x $11/16$ " and $3/4$ " x $7/8$ ".



Number of Pieces	Weight each	Order Code KEN-582
7 Metric	1280g	-9750K
5 AF	930g	-9760K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

Made from chrome vanadium steel with a satin finish body and highly polished heads, with double ended closed jaw bi-hexagon offset. Conform to **DIN 838 Metric & AF, BS 192 : 1982 & BS 3555 : 1998 Whitworth.**



Metric Size (mm)	Overall Length	Weight each	Order Code KEN-582
6 x 7	180	40g	-1570K
8 x 9	190	60g	-1590K
8 x 10	200	60g	-1600K
10 x 11	205	87g	-1610K
10 x 13	220	120g	-1620K
12 x 13	220	120g	-1640K
13 x 17	270	190g	-1660K
14 x 15	235	152g	-1670K
16 x 17	250	186g	-1680K
17 x 19	270	240g	-1690K
18 x 19	270	240g	-1700K
19 x 22	290	350g	-1710K
19 x 24	330	380g	-1720K
20 x 22	290	320g	-1730K
21 x 23	315	400g	-1740K
22 x 24	330	368g	-1750K
24 x 26	335	465g	-1760K
24 x 27	340	465g	-1770K
24 x 30	362	495g	-1780K
25 x 28	360	545g	-1790K
27 x 30	380	638g	-1800K
30 x 32	380	638g	-1810K
30 x 36	420	820g	-1820K
32 x 36	420	900g	-1830K
36 x 41	430	1100g	-1840K
41 x 46	440	1300g	-1850K
46 x 50	505	1570g	-1860K

AF Size AF	Weight each	Order Code KEN-582
1/4" x 5/16"	60g	-1260K
5/16" x 3/8"	75g	-1270K
3/8" x 7/16"	94g	-1280K
7/16" x 1/2"	124g	-1290K
1/2" x 9/16"	152g	-1300K
9/16" x 5/8"	157g	-1310K
5/8" x 11/16"	218g	-1320K
11/16" x 3/4"	250g	-1340K
3/4" x 7/8"	320g	-1350K
13/16" x 7/8"	335g	-1360K
15/16" x 1"	465g	-1380K
1 1/16" x 1 1/4"	618g	-1410K

Ring Crescent Wrenches

Chrome vanadium steel with satin chrome finish. Heads conform to **DIN 838.**



Size (mm)	Overall Length	Weight each	Order Code KEN-582
10 x 11	142	71g	-3766K
12 x 13	164	100g	-3768K
14 x 15	189	157g	-3770K
17 x 19	219	172g	-3772K

Whitworth Size Whitworth	Weight each	Order Code KEN-582
3/16" x 1/4"	110g	-2010K
1/4" x 5/16"	150g	-2020K
5/16" x 3/8"	200g	-2030K
7/16" x 1/2"	354g	-2050K
9/16" x 5/8"	490g	-2070K
1 1/16" x 3/4"	660g	-2100K

Sets


7 Piece Metric: 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.

11 Piece Metric: 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 and 30 x 32mm.

5 Piece AF: 1/4" x 5/16", 3/8" x 7/16", 1/2" x 9/16", 5/8" x 11/16" and 3/4" x 7/8".

10 Piece AF: 1/4" x 5/16", 5/16" x 3/8", 3/8" x 7/16", 7/16" x 1/2", 1/2" x 9/16", 9/16" x 5/8", 5/8" x 11/16", 11/16" x 3/4", 3/4" x 7/8" and 15/16" x 1".

5 Piece BSW: 3/16" x 1/4", 5/16" x 3/8", 7/16" x 1/2", 9/16" x 5/8" and 1 1/16" x 3/4" BSW.

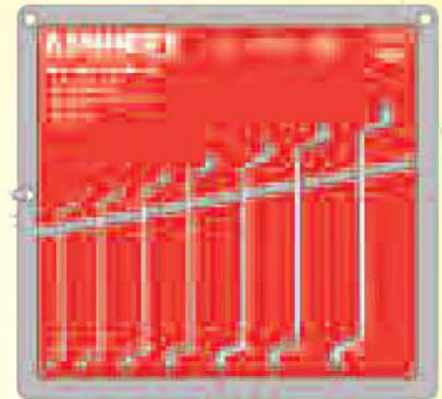


No. of Pieces	Weight each	Order Code KEN-582
7 Metric	1.20kg	-1960K
11 Metric	1.90kg	-1970K
5 AF	0.92kg	-1920K
10 AF	2.00kg	-1930K
5 BSW	2.75kg	-1950K

Ring Crescent Wrench Sets

4 Piece Metric:

10 x 11mm,
12 x 13mm,
14 x 15mm,
17 x 19mm.

**4
PIECES**

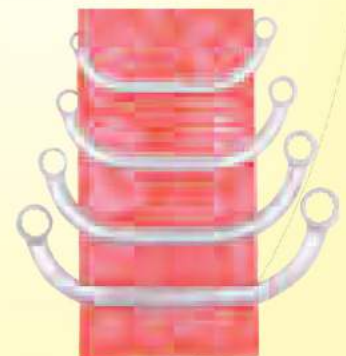

Range (mm)	Weight each	Order Code KEN-582
10 - 19	540g	-3776K

**KENNEDY Professional Flared Nut Ring Spanners**

Conform to: **ASME B107.4**. Made from chrome vanadium steel with a highly polished mirror finish. Made to American Federal Standards, giving higher torque therefore improved performance. The wrench will fit over the pipe to give a positive location on the nut. Can be used on hydraulic pipes, brake pipes etc.

**Metric Conform with ANSI B107.9M.**

Size (mm)	Overall Length	Weight each	Order Code KEN-582
8 x 10	145	45g	-1020K
9 x 11	145	45g	-1030K
12 x 14	175	90g	-1040K
13 x 15	170	90g	-1050K
16 x 17	200	130g	-1060K

Set**5 Piece Metric:** 8 x 10, 9 x 11, 12 x 14, 13 x 15 and 16 x 17mm.**4 Piece AF:** 5/16" x 3/8", 3/8" x 7/16", 1/2" x 9/16" and 5/8" x 11/16".

Number of Pieces	Weight each	Order Code KEN-582
5 Metric	420g	-1090K
4 AF	270g	-1170K

**AF Conform with ANSI B107.6**


Size (AF)	Overall Length	Weight each	Order Code KEN-582
5/16" x 3/8"	145	45g	-1110K
3/8" x 7/16"	155	60g	-1120K
1/2" x 9/16"	175	90g	-1130K
5/8" x 11/16"	198	130g	-1140K

KENNEDY Industrial Flared Nut Ring Spanners

Conform to **ASME B107.4**. Made from high quality chrome vanadium steel. Satin finish body with highly polished heads. Offset ends. The wrench will fit over the pipe to give a positive location on the nut. Can be used on hydraulic pipes, brake pipes etc.

**HAND TOOLS****Metric Conform with ANSI B107.9M.**

Size (mm)	Overall Length	Weight each	Order Code KEN-582
6 x 8	135	38g	-3490K
8 x 10	135	38g	-3500K
9 x 11	155	54g	-3510K
10 x 11	155	54g	-3520K
10 x 12	155	54g	-3530K
12 x 14	175	95g	-3540K
13 x 14	175	95g	-3550K
14 x 17	200	130g	-3590K
17 x 19	200	130g	-3600K
19 x 22	225	220g	-3610K
22 x 24	230	270g	-3620K
24 x 27	250	340g	-3630K
30 x 32	275	450g	-3640K

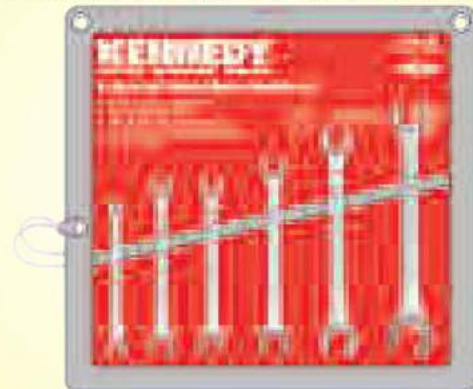Set**6 Piece Metric:** 6 x 8, 9 x 11, 10 x 12, 13 x 14, 14 x 17 and 19 x 22mm.**5 Piece AF:** 1/4" x 5/16", 3/8" x 7/16", 1/2" x 9/16", 5/8" x 11/16" and 3/4" x 7/8".

Number of Pieces	Weight each	Order Code KEN-582
6 Metric	710g	-3650K
5 AF	620g	-3659K

AF Conform with ANSI B107.9.

Size (AF)	Weight each	Order Code KEN-582
1/4" x 5/16"	38g	-3651K
3/8" x 7/16"	54g	-3652K
1/2" x 9/16"	95g	-3653K
5/8" x 11/16"	130g	-3654K
3/4" x 7/8"	220g	-3655K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



KENNEDY Industrial
Open Ended Spanners

Chrome vanadium steel (except * which are made from drop forged carbon steel) with a satin finish body and highly polished heads, with a 15° offset.

DIN 3110: 4 x 5mm to 32 x 36mm, 1/4" x 5/16" to 1 5/16" x 1 5/8" AF.

ASME B107.39: 36 x 41mm to 46 x 50mm, 1 7/16" x 1 5/8" to 1 13/16" x 2" AF.

DIN 3110 & BS192:1982: 1/8" x 3/16" to 1" x 1 1/8" Whitworth.



HAND TOOLS

Metric	Overall Length	Weight each	Order Code KEN-582
4 x 5	103	12g	-0530K
5 x 5.5	103	15g	-0540K
5.5 x 7	122	25g	-0550K
6 x 7	122	25g	-0570K
7 x 8	122	25g	-0580K
8 x 9	140	32g	-0590K
8 x 10	140	32g	-0600K
10 x 11	156	48g	-0610K
10 x 12	156	48g	-0612K
10 x 13	172	63g	-0620K
11 x 13	172	63g	-0630K
12 x 13	172	63g	-0640K
12 x 14	172	63g	-0644K
13 x 15	186	100g	-0650K
13 x 17	188	96g	-0660K
14 x 15	188	96g	-0670K
14 x 17	188	96g	-0677K
16 x 17	204	120g	-0680K
17 x 19	220	171g	-0690K
18 x 19	220	171g	-0700K
19 x 21	234	198g	-0709K
19 x 22	234	198g	-0710K
19 x 24	234	198g	-0720K
20 x 22	234	198g	-0730K
21 x 23	247	200g	-0740K
22 x 24	247	200g	-0750K
24 x 26	266	311g	-0760K
24 x 27	266	311g	-0770K
24 x 30	285	405g	-0780K
25 x 28	285	405g	-0790K
30 x 32	302	460g	-0810K
27 x 30	302	460g	-0820K
27 x 32	302	460g	-0830K
30 x 36	319	692g	-0840K
32 x 36	319	692g	-0850K
*36 x 41	434	1340g	-0860K
*41 x 46	465	1782g	-0870K
*46 x 50	495	2368g	-0880K

AF	Size AF	Weight each	Order Code KEN-582
	1/4" x 5/16"	25g	-0260K
	5/16" x 3/8"	32g	-0270K
	3/8" x 7/16"	48g	-0280K
	7/16" x 1/2"	63g	-0290K
	1/2" x 9/16"	80g	-0300K
	9/16" x 5/8"	96g	-0310K
	5/8" x 1 1/16"	120g	-0320K
	5/8" x 3/4"	170g	-0330K
	1 1/16" x 3/4"	171g	-0340K
	3/4" x 7/8"	198g	-0350K
	1 3/16" x 7/8"	220g	-0360K
	7/8" x 1 5/16"	260g	-0370K
	1 5/16" x 1"	311g	-0380K
	1" x 1 1/8"	405g	-0400K
	1 1/16" x 1 1/4"	460g	-0410K
	1 1/8" x 1 5/16"	460g	-0420K
	1 3/16" x 1 5/16"	460g	-0430K
	1 1/4" x 1 3/8"	692g	-0450K
	1 5/16" x 1 1/2"	692g	-0460K
	*1 7/16" x 1 5/8"	1340g	-0470K
	*1 1/2" x 1 5/8"	1340g	-0480K
	*1 13/16" x 1 7/8"	1782g	-0490K
	*1 13/16" x 2"	2368g	-0510K

Whitworth	Weight each	Order Code KEN-582
1/8" x 3/16"	55g	-0010K
3/16" x 1/4"	70g	-0020K
1/4" x 5/16"	90g	-0030K
5/16" x 3/8"	120g	-0040K
3/8" x 7/16"	225g	-0050K
7/16" x 1/2"	230g	-0060K
1/2" x 9/16"	325g	-0070K
9/16" x 5/8"	385g	-0090K
9/16" x 1 1/16"	435g	-0100K
5/8" x 1 1/16"	490g	-0110K
5/8" x 3/4"	495g	-0120K
1 1/16" x 3/4"	495g	-0130K
3/4" x 7/8"	740g	-0140K

Sets:

7 Piece Metric: 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.


8 Piece Metric: 24 x 26, 25 x 28, 27 x 30, 27 x 32, 32 x 36, *36 x 41, *41 x 46 and *46 x 50mm.

11 Piece Metric: 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 and 30 x 32mm.

5 Piece AF: 1/4" x 5/16", 3/8" x 7/16", 1/2" x 9/16", 5/8" x 1 1/16" and 3/4" x 7/8".

10 Piece AF: 1/4" x 5/16", 5/16" x 3/8", 3/8" x 7/16", 7/16" x 1/2", 1/2" x 9/16", 9/16" x 5/8", 5/8" x 1 1/16", 1 1/16" x 3/4", 3/4" x 7/8" and 1 5/16" x 1".

8 Piece Whitworth: 1/8" x 3/16", 3/16" x 1/4", 1/4" x 5/16", 5/16" x 3/8", 3/8" x 7/16", 7/16" x 1/2", 1/2" x 9/16" and 9/16" x 5/8".

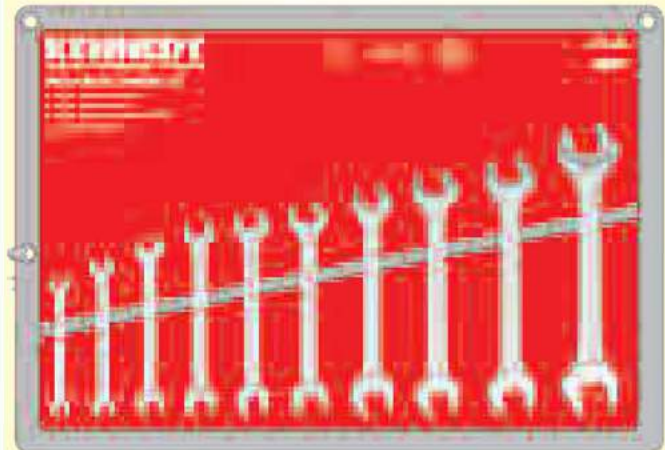

Number of Pieces	Weight each	Order Code KEN-582
7 Metric	0.64kg	-0960K
8 Metric	7.70kg	-0990K
11 Metric	1.90kg	-0970K
5 AF	0.55kg	-0920K
10 AF	1.20kg	-0930K
8 Whit	1.50kg	-0950K


KENNEDY PROFESSIONAL Professional Open Ended Spanners


Chrome vanadium steel with a highly polished mirror finish preventing oil and dirt from adhering to the spanner. Made to American Federal Standards, extra thick heads offer higher torque forces to be applied therefore improved performance. Conform to **ASME B107.39**



Size (mm)	Overall Length	Weight each	Order Code KEN-582
6 x 7	126	25g	-2990K
8 x 9	135	45g	-3000K
10 x 11	146	55g	-3010K
12 x 13	165	90g	-3020K
14 x 15	185	120g	-3030K
16 x 17	185	138g	-3040K
18 x 19	230	210g	-3050K
20 x 22	250	280g	-3051K
21 x 23	250	290g	-3052K
24 x 27	290	400g	-3053K
30 x 32	360	750g	-3054K

Set
7 Piece Metric:
 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.

11 Piece Metric:
 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 and 30 x 32mm.



Number of Pieces	Weight each	Order Code KEN-582
7 Metric	780g	-3900K
11 Metric	2730g	-3910K

YAMOTO Industrial Open Ended Spanners

Made from chrome vanadium steel with polished head and 15° offset. Conform to **DIN 3110**



Metric

Size (mm)	Overall Length	Weight each	Order Code YMT-582
6 x 7	122	25g	-2990K
8 x 9	140	32g	-3000K
10 x 11	156	48g	-3010K
12 x 13	172	63g	-3020K
14 x 15	188	96g	-3030K
16 x 17	204	120g	-3040K

Size (mm)	Overall Length	Weight each	Order Code YMT-582
18 x 19	220	171g	-3050K
20 x 22	234	198g	-3051K
21 x 23	247	200g	-3052K
24 x 27	266	311g	-3053K
30 x 32	302	460g	-3054K

Sets
7 Piece Metric:
 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.

11 Piece Metric:
 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 & 30 x 32mm.



Number of Pieces	Weight each	Order Code YMT-582
7 Metric	780g	-3930K
11 Metric	2730g	-3910K

SENATOR QUALITY TOOLING Open Ended Spanners

Drop forged steel with 15° cranked open ends. Satin finish heads. Conform to **DIN 3110**



Metric

Size (mm)	Overall Length	Weight each	Order Code SEN-582
6 x 7	122	25g	-4700K
8 x 9	140	32g	-4710K
10 x 11	156	48g	-4720K
12 x 13	172	63g	-4730K
14 x 15	188	96g	-4740K
16 x 17	204	120g	-4750K

Size (mm)	Overall Length	Weight each	Order Code SEN-582
18 x 19	220	171g	-4760K
20 x 22	234	198g	-4770K
21 x 23	247	200g	-4780K
24 x 27	266	311g	-4790K
30 x 32	302	460g	-4800K

Sets
7 Piece Metric:
 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.

11 Piece Metric:
 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 & 30 x 32mm.




Number of Pieces	Weight each	Order Code SEN-582
7 Metric	780g	-4830K
11 Metric	2730g	-4850K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



KENNEDY Crowfoot
Wrenches

3/8 Chrome vanadium wrenches designed to be used for getting into tight spots and hard to reach areas, in particular around tubing such as hydraulic lines etc. For use with 3/8" square drive tools.



Size (mm)			Weight each	Order Code KEN-582
(c)	(b)	(a)		
10	22	9	20g	-6280K
11	25	9	25g	-6281K
12	28	9	33g	-6282K
13	28	9	33g	-6283K
14	33	9	37g	-6284K
15	33	9	46g	-6285K
17	38	9	60g	-6287K
19	43	10	72g	-6289K
22	47	10	94g	-6292K
24	53	10	117g	-6294K

Miniature Open Ended Spanners




Metric. Conform to **BS 192 : 1982 & DIN 3110.**

Size (mm)	Overall Length	Weight each	Order Code KEN-582
3.2 x 4	70	6g	-1001K
4 x 5	70	6g	-1002K
5 x 5.5	80	11g	-1003K
5.5 x 6	80	11g	-1004K
6 x 7	80	10g	-1005K
7 x 8	90	15g	-1006K

BA. Conform to **BS 1842 : 1952.**

Size (BA)	Overall Length	Weight each	Order Code KEN-582
0 x 2	89	25g	-0190K
1 x 3	67	20g	-0200K
4 x 6	63	10g	-0220K
5 x 7	63	5g	-0230K
8 x 10	64	5g	-0240K
9 x 11	51	5g	-0250K

Set
6 Piece BA: 0 x 2, 1 x 3, 4 x 6, 5 x 7, 8 x 10 and 9 x 11BA.
6 Piece Metric: 3.2 x 4, 4 x 5, 5 x 5.5, 5.5 x 6, 6 x 7 and 7 x 8mm

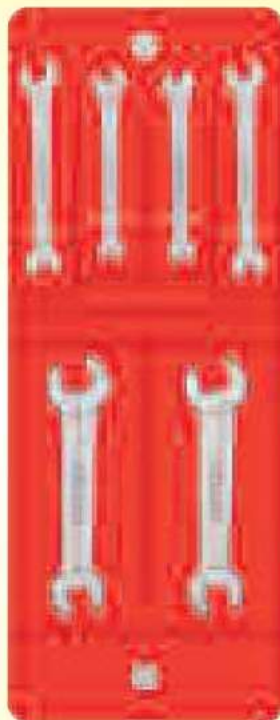

Number of Pieces	Weight each	Order Code KEN-582
6 BA	90g	-0910K
6 Metric	90g	-1010K

10 Piece Metric Set Contents:

10, 11, 12, 13, 14, 15, 17, 19, 22 and 24mm. Supplied on a sliding socket rail for storage.

**10
PIECES**



Weight each	Order Code KEN-582
610g	-6300K

Flexi-ring End Sockets

1/2 Made from polished chrome vanadium. These tough flexi-ring end sockets are designed to allow access over long studs and for awkwardly positioned nuts and bolts. Swivels through 220°.



Type	Size	Overall Length	Weight each	Order Code KEN-582
1/2	13mm	70mm	124g	-1180K
	14mm	70mm	123g	-1181K
	15mm	70mm	121g	-1182K
	16mm	70mm	119g	-1183K
	17mm	77mm	158g	-1184K
	19mm	77mm	152g	-1185K
	22mm	82mm	193g	-1186K
	24mm	86mm	213g	-1187K

8 Piece Metric Set Contents:

13, 14, 15, 16, 17, 19, 22 and 24mm. Supplied with a sturdy hanging rail.

**8
PIECES**



Weight each	Order Code KEN-582
1.3kg	-1190K


KENNEDY PROFESSIONAL Swivel End Socket Wrenches

Designed to give greater flexibility and improved access when working in difficult conditions. Bi-hexagon (12 point). Manufactured from fully polished chrome vanadium steel. Conform with **ANSI B107.5M**.



Size (mm)	Overall Length	Weight each	Order Code
8 x 9	175	135g	-3670K
10 x 11	185	135g	-3680K
12 x 13	196	150g	-3690K
14 x 15	220	200g	-3700K
16 x 17	240	245g	-3710K
18 x 19	265	295g	-3720K

Set 6 Piece Bi-hexagon:
8 x 9,
10 x 11,
12 x 13,
14 x 15,
16 x 17 and
18 x 19mm.



6 PIECES

Weight each 1.40kg
Order Code **KEN-582**
-3725K

KENNEDY QUALITY INDUSTRIAL TOOLING Adjustable 'C' Hook Spanners

Manufactured from chrome vanadium steel with a highly polished chrome plated finish.



Diameter	Weight each	Order Code
3/4 - 2"	120g	-9600K
1 1/4 - 3"	250g	-9610K
2 - 4 3/4"	460g	-9620K
4 1/2 - 6 1/4"	460g	-9630K

Adjustable Pin & Hook Wrench

Manufactured from drop forged Chrome Vanadium Steel with a polished chrome finish. For use on slotted rings.



Diameter	Order Code
15 - 35mm	-9540K
35 - 50mm	-9550K
50 - 80mm	-9560K
80 - 120mm	-9570K
120 - 180mm	-9580K

Strap & Chain Wrenches

Used for gripping round and irregular shaped items, tubes and piping. Ideal for oil filters, hot radiator caps and hub caps. Both types suitable for 60 - 140mm diameters.

Strap Type: Hardened chrome vanadium handle with industrial strength rubber strap that will not mark or scratch workpieces.

Chain Type: Hardened chrome vanadium handle with heavy duty chain for a positive grip.



Type	Weight each	Order Code
Strap	280g	-9500K
Chain	430g	-9520K

YAMOTO Pin & Hook Wrench Set

Made of Chrome Vanadium Steel with a satin finish. Set consists of 3 wrenches along with 3 interchangeable hinged hook and pin arms plus 2 spare pins. For use on slotted rings. Supplied in a strong carry case.

8 PIECES



Sizes	Order Code
3/4 - 4 3/4"	-9100K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

CHROME VANADIUM

- Grips fasteners which are up to 95% rounded off
- Will not damage worn or rusted fasteners
- Also fits a wide range of non-metric Hexagons and E-Torx® Drive Sizes
- Fully chrome plated finish for easy clean
- Unique 'Double-Knurl' for high grip
- Aluminium-free finish

KENGRIP®

Patented Design



Will also fit a wide range of non-metric Hexagons and E-Torx® Drive Sizes.



Standard Length Sockets



Conform to DIN3124.



1/4" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582
4.0mm	25.0	10g	-4161K
4.5mm	25.0	10g	-4162K
5.0mm	25.0	10g	-4163K
5.5mm	25.0	10g	-4164K
6.0mm	25.0	10g	-4165K
7.0mm	25.0	20g	-4166K
8.0mm	25.0	20g	-4167K
9.0mm	25.0	20g	-4168K
10.0mm	25.0	20g	-4169K
11.0mm	25.0	30g	-4170K
12.0mm	25.0	30g	-4171K
13.0mm	25.0	30g	-4172K
14.0mm	25.0	40g	-4173K

Standard Length Sockets



Conform to DIN3124.



3/8" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582
6.0mm	26.0	30g	-5832K
7.0mm	26.0	30g	-5833K
8.0mm	26.0	30g	-5834K
9.0mm	26.0	30g	-5835K
10.0mm	26.0	30g	-5836K
11.0mm	26.0	30g	-5837K
12.0mm	26.0	30g	-5838K
13.0mm	26.0	30g	-5839K
14.0mm	30.0	40g	-5840K
15.0mm	30.0	40g	-5841K
16.0mm	30.0	50g	-5842K
17.0mm	30.0	60g	-5843K
18.0mm	30.0	70g	-5844K
19.0mm	30.0	70g	-5845K
20.0mm	30.0	80g	-5846K
21.0mm	30.0	80g	-5847K
22.0mm	27.0	100g	-5848K

Deep Sockets



Conform to DIN3124.



3/8" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582
8.0mm	62.0	40g	-5849K
9.0mm	62.0	40g	-5850K
10.0mm	62.0	50g	-5851K
11.0mm	62.0	50g	-5852K
12.0mm	62.0	60g	-5853K
13.0mm	62.0	60g	-5854K
14.0mm	62.0	70g	-5855K
15.0mm	62.0	100g	-5856K
16.0mm	62.0	115g	-5857K
17.0mm	62.0	130g	-5858K
18.0mm	64.0	120g	-5859K
19.0mm	64.0	140g	-5860K
21.0mm	64.0	155g	-5861K
22.0mm	64.0	200g	-5862K

Standard Length Sockets



Conform to DIN3124.



1/2" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582
8.0mm	36.0	50g	-6871K
9.0mm	37.0	50g	-6872K
10.0mm	37.0	50g	-6873K
11.0mm	37.0	50g	-6874K
12.0mm	37.0	50g	-6875K
13.0mm	37.0	50g	-6876K
14.0mm	37.0	50g	-6877K
15.0mm	37.0	60g	-6878K
16.0mm	37.0	60g	-6879K
17.0mm	37.0	60g	-6880K
18.0mm	37.0	80g	-6881K
19.0mm	37.0	70g	-6882K
20.0mm	37.0	80g	-6883K
21.0mm	37.0	70g	-6884K
22.0mm	37.0	90g	-6885K
23.0mm	37.0	110g	-6886K
24.0mm	37.0	110g	-6887K
25.0mm	40.0	150g	-6888K
26.0mm	40.0	140g	-6889K
27.0mm	40.0	170g	-6890K
28.0mm	40.0	170g	-6891K
29.0mm	40.0	170g	-6892K
30.0mm	45.0	210g	-6893K
32.0mm	45.0	230g	-6895K
33.0mm	45.0	230g	-6898K
36.0mm	45.0	245g	-6899K

Kennedy KenGrip™ sockets will drive metric fasteners which are up to 95% rounded off and inch sizes which are up to 70% rounded off. Each KenGrip™ socket can be used for up to five different fastener sizes. Kennedy KenGrip™ Side Drive Sockets are suitable for a wide range of fastener types, including ISO Metric, UNC, UNF, BSW, BSF and E-Torx.

The table below lists the most common sizes:

KenGrip Size	Width Across Flat	Max. Rounding Off	Inch (AF)	Max. Rounding Off	Also Suitable for:					
					BSW	BSF	BA	E-TRX Drive Size		
8mm	8mm	Up to 95%	5/16"	Up to 70%			3BA	E10		
9mm	9mm		11/32"		2BA					
10mm	10mm		3/8"		1BA	E12				
11mm	11mm		13/32"		OBA					
12mm	12mm		7/16"		3/16"	1/4"			E14	
13mm	13mm		1/2"						E16	
14mm	14mm		17/32"				1/4"	5/16"		
15mm	15mm		9/16"							E18
16mm	16mm		5/8"				5/16"	3/8"		E20
17mm	17mm		21/32"							
18mm	18mm		11/16"				3/8"	7/16"		
19mm	19mm		3/4"							E24
20mm	20mm		25/32"							
21mm	21mm		13/16"				7/16"	1/2"		
22mm	22mm		27/32"							
23mm	23mm		7/8"							E28
24mm	24mm		15/16"				1/2"	9/16"		
25mm	25mm		31/32"							
26mm	26mm		1"				9/16"	5/8"		E32
27mm	27mm	11/16"								
30mm	30mm	15/32"								
32mm	32mm	11/4"			11/16"	3/4"		E40		

KENNEDY PROFESSIONAL Side Drive Socket Sets


KENGRIP Patented Design

1/4" Square Drive 19 Piece Metric Set

Metric Ken-Grip® Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

Accessories: ratchet handle, spinner handle, sliding T-handle, flexi-drive 145mm, universal joint, extension bar 100mm.

**19
PIECES**



Weight each	Order Code
880g	KEN-582 -8800K

3/8" Square Drive 50 Piece Metric Set

Ken-Grip® Standard & Deep Sockets
Standard: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 and 22mm.

Deep: 10, 11, 12, 13, 14, 15, 17, 19 and 22mm.

Screwdriver Bits: Slotted 5, 5.5 and 6.5mm.

Crosspoint No.1, 2, 3, 4.

Hexagon Sockets: 3, 4, 5, 6, 8, 10mm.

Accessories: ratchet handle, sliding T-handle, spinner handle, swivel handle, universal joint, 125 and 250mm extensions, 250mm wobble extensions, 1/4" and 1/2" male adaptors, 1/4" socket bit coupler. Robust fitted case with security padlock hole and cushion grip handle.

**50
PIECES**



Weight each	Order Code
3.00kg	KEN-582 -8810K

For Regular Hex' and Bi-Hex' Sockets See Pages **456 to 511**

1/2" Square Drive 30 Piece Metric Set

Ken-Grip®: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 30 and 32mm.

Spark Plug Sockets: M10 and M14.

Accessories: quick release ratchet handle, sliding T-handle, universal joint, 75, 125 and 250mm extension bars. Robust fitted case with security padlock hole and cushion grip handle.

**30
PIECES**



Weight each	Order Code
5.50kg	KEN-582 -8820K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR