



Lubricants & Chemical Products

Product Grading



Production

High performance industrial tooling designed for continuous use applications on machine tools where repeatability and long tool life are of critical importance.



Professional

Industrial tooling that has enhanced features and benefits demanded by craftsmen and professional users.



Industrial

Designed for regular use in industrial applications. Manufactured to stringent quality levels and international standards.



Workshop

Standard quality tooling for use by tradesmen and generally industrial use.



Maintenance

Products designed for general maintenance of machines, workshops, garages and some household applications.



Home Improver

DIY quality tooling. Designed for home use and light industrial applications.



Product Groups 703 - 740

Contents

Description	Group	Page	Description	Group	Page
Adhesives - Instant	725	670	Lubricating & Penetrating Oils	732	675 - 676
- Spray	725	670	Markers - Line	734	681
Anti-Seize Lubricants	732	676	- Paint	734	681
Automotive Maintenance & Repair	732	678 - 680	Melting Pots	709	668
Cartridge Applicator Guns	715	669	Metal Working Lubricants	740	682
Chain, Drive & Rope Lubricants	732	674	Mould Release Agents	732	675
Corrosion Preventatives	732	676	'O' Rings	726	670
Degreasers	727	671	Process & System Cleaners	740	683
Food Safe Cleaners	740	685	Sealants & Fillers	716	669
Food Safe Oils & Greases	740	684 - 685	Tapping & Drilling Lubricants	732	680
Hot Dips Coatings	708	668	Water Displacing & Maintenance Oils	732	678
Industrial Cleaners & Solvents	732	672 - 673	Welders Anti-Spatter	720	677
Leak Detectors, Flawfinders & Freezer Sprays	732	677			

KENNEDY Protective Coating
Red-Hot-Dip



Hot dip strippable plastic coating moulds itself around the component or tool being coated to provide 100% coverage and protects against corrosion and impacts, for up to ten years. The component protected can be easily identified through the translucent coating. Simply removed by peeling it off, leaves behind a thin oil film to provide short term protection against corrosion. The removed protective dip can be reused. Never directly apply heat to melt the protective dip, always use with a suitable melting pot. Working temperature 130°C to 160°C (for optimum results 140°C to 145°C).

RD160
Red



AD160
Amber



Description (Bars)	Weight each	Order Code KEN-708
RD160 Single Bar	0.50kg	-0050K
RD160 Case (50)	25.00kg	-0250K
AD160 Single Bar	0.50kg	-0500K
AD160 Case (50)	25.00kg	-0550K

Industrial Melting Pots

A range of melting pots which have been designed for industrial melting of waxes, glues and plastics etc. for coating, casting, protecting etc. The pots are electrically heated and thermostatically temperature controlled from 50°C to 200°C. Constructed from anodised aluminium with ceramic fibre insulation. Pots supplied with 2m cable and fused plug, lifting handle, double-wall heat-conserving lid, on/off switch and safety thermal cut-out. 220/240V as standard.



Capacity	Internal Dimensions		Maximum Wattage	Order Code KEN-709	
	Litres	Pints			Diameter
0.7	1.20	100mm	90mm	275	-1010K
2.5	4.40	150mm	140mm	600	-1030K
6.0	10.5	200mm	190mm	1125	-1060K
12.0	21.0	250mm	240mm	1650	-1120K

LUBRICANTS & CHEMICAL PRODUCTS

SOLENT Maintenance
Oil Stain Removers

A biological oil stain remover that rapidly removes and digests oil stains from block and concrete driveways, garage floors and forecourts.



Product Number	Size	Order Code SOL-707
Suitable for Hard Surfaces		
OSRHSB-1	1ltr	-5840A
OSRHSB-5	5ltr	-5842C
Suitable for Tarmac & Asphalt		
OSRTA-1	1ltr	-5858A
OSRTA-5	5ltr	-5860C


Sealant Cartridge Applicator Guns
Economy Plastic Gun - C3

Robust, easy to use. Smooth action.


Max. cartridge size: 310ml.


Type	Cartridge (max size)	Order Code
C3	310ml	-1200K

Professional Metal Guns

Extremely robust and ideal for continuous use.

Will not twist under pressure. Smooth action for optimum application of sealant.

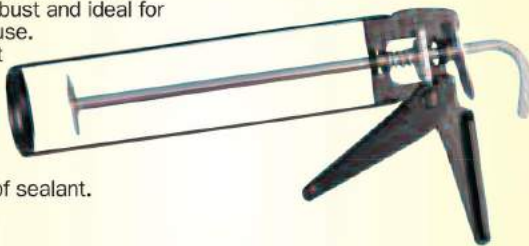

Type	Cartridge (max size)	Order Code
C3	310ml	-1000K
C4	400ml	-2000K

Ergonomic Sealant Applicator Gun
Heavy Duty Metal Gun - C3

Extremely robust and ideal for continuous use. Will not twist under pressure, ergonomically designed to reduce operator fatigue. Smooth action for optimum application of sealant.



Type	Cartridge (max size)	Order Code
C3	310ml	-1400K


P.T.F.E. Tape
Gas Type: 12mm x 5m roll. For gas and hot water pipes (not for potable water). Made to **BS EN 751:3**.

Water Type: 12mm x 12m roll. For hot and cold water pipes. Made to **BS 6920 & BS 7786**.

P.T.F.E. Thread Sealing Tape: 25mm x 12m roll. Made to **EN571**.


Description	Order Code
Gas	-8000K
Water	-9000K
Thread Sealing Tape	-9010K


Silicone Sealants
General-Purpose Silicone

 High performance acetoxy silicone provides a permanently watertight flexible seal and offers excellent adhesive properties, making it suitable for use on glass, sanitary-ware, ceramics and non-porous surfaces. For indoor and outdoor use. Weather-proof. Mould-resistant. Life expectancy up to 25 years. Conforms to **BS 5889**.

310 ml


Colour	Order Code
White	-3100K
Clear	-3110K
Black	-3130K
Grey	-3140K


Non-Setting Sealant
Gas Seal

Non-setting, off-white compound for use on metallic threaded and face joints carrying gas including aluminium, copper, steel and zinc.

Suitable for use with Propane, Butane, LPG and Natural gas. Ideal for boats, camping, motor-homes, caravans, BBQs and most domestic appliances. Full bond strength is achieved immediately dependent upon humidity levels. Can be wiped up with a disposable cloth, any residual excess can be rinsed with water.

Temperature range: -20°C to +125°C.

Maximum gas pressure: 2.9psi (0.2bar).

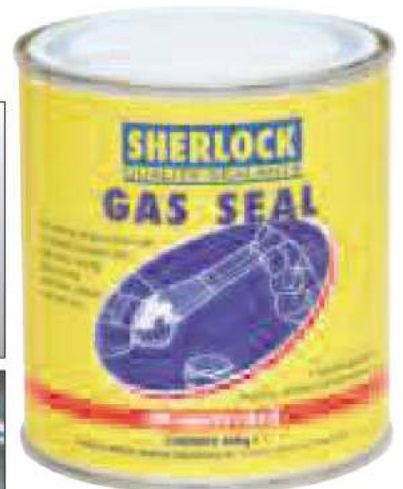400g


Size	Order Code
400g	-4010K


PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

SHERLOCK Instant Adhesive


High performance cyanoacrylate adhesive suitable for use on metal, plastic, china, leather, wood, glass and rubber. Bonds in seconds.



1001 uses in the Home and Workshop

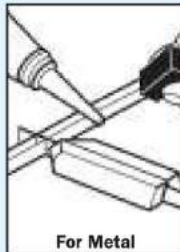

For Metal

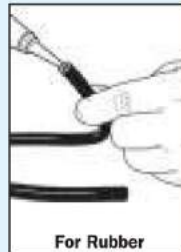

For Rubber



For Plastics



For Glass & Ceramics

Size	Order Code
3g	SHK-725 -6010K

SHERLOCK Nitrile 'O' Ring Service Kits

Inch 'O' Rings manufactured to BS1806. Metric 'O' Rings manufactured to DIN 7715 standards.

Both kits are supplied in a durable storage box with sunken cavities for the simple location of the correct sized rings.



Size range
Inch kit: 1/8" - 2"
Metric kit: 3mm - 50mm



Product Number	Type	Number of Pieces	Order Code
OR1	Inch	407	SHK-726 -5510K
OR2	Metric	419	-5520K

SHERLOCK Instant Nails

A high strength gap filling solvent-free adhesive that produces a quick 'grab' and replaces mechanical fixings in a multitude of home improvement applications. Dries white and is over-paintable when dry.



Size	Order Code
310ml	SHK-725 -6500K

Heavy Duty Spray Adhesive

Provides a flexible but ultra strong bond for many applications from foam backed carpets and carpet tiles, underfelt, flexible foams, fabrics, felt and cork to plywood, softwood, MDF, laminates, metal, hardboard, glass and rigid plastics.



Size	Order Code
500ml	SHK-725 -4240K



Heavy Duty Spray Adhesive

SA-90
Provides a strong flexible bond for many applications where a conventional adhesive would be too difficult to apply. Ideal for use on foam backed carpets, underfelt and for spot fixin carpet tiles. Can also be used to bond all types of flexible foams, fabrics, felt, cork etc to plywood, softwood, MDF laminates, metal, hardboard, glass, rigid plastics etc. Etc applied straight from the can.



The Tradesman's Choice

Size	Order Code
500ml	ACN-732 -8750K



SOLENT
MAINTENANCE

Just Orange

Citrus-Based Solvent Degreaser

Just Orange is a powerful, citrus-based solvent degreaser for the cleaning and degreasing of engineering components and equipment. Effectively removes heavy oils, greases, bitumen, wet paints, adhesives and sealants from virtually all hard surfaces.

Contains no chlorinated or aromatic solvents. For use as an alternative to solvents such as acetone, benzene, butyl cellulose, CFC's, freon, methylene chloride, HCFC's, isopropyl alcohol, methyl ethyl, ketone, mineral spirits, toluene, trichloroethylene, xylene etc.



Size	Order Code
1ltr	-2800A
5ltr	-2810B
20ltr	-2820C

Orange Plus

Citrus-Based Water Rinseable Degreaser

Orange-Plus is a highly effective, water rinseable solvent degreaser for the removal of stubborn and heavy oils, greases, paints, inks, adhesive and resins from engineering components and equipment.

Once cleaned, the contaminants can be rinsed away with water. Suitable for all metals, including plant and machinery, and some plastics. Contains no chlorinated or aromatic solvents. For use as an alternative to solvents such as xylene, toluene, acetone etc.

Not recommended for use with Parts Washers



Size	Order Code
5ltr	-2910B
20ltr	-2920C

Aqueous Orange

Citrus-Based Aqueous Cleaner

Aqueous Orange is highly concentrated, low alkaline blend of citrus solvents and powerful surfactants, designed to remove oils and greases, inks, polishing compounds and lapping slurry from hard surfaces.

It can be diluted with water for maximum economy and its micro-emulsion formula offers the benefits of water-based efficiency with solvent based performance. It also contains a corrosion inhibitor and can be used both manually and in machine operations.

Replaces white spirit, paraffin and highly alkaline cleaners.



Size	Order Code
5ltr	-2610B
20ltr	-2620C



GROUP
727



SOLENT Biodegradable Degreaser

For cleaning and degreasing equipment and parts. Safe for use all around the house even on delicate surfaces. Powerful degreaser removes difficult soils such as dust-laden oils, fuels and lubricants. For virtually all hard surfaces and ferrous metals. Non-toxic, non-reactive and non-carcinogenic. Derived from renewable resources.

Size: 1ltr.



Size	Order Code
1ltr	-3240D

SOLENT Oil Stain Removers

A biological oil stainremover that rapidly removes and digests oil stains from block and concrete driveways, garage floors and forecourts.



Product Number	Size	Order Code
		SOLENT-707
Suitable for Hard Surfaces		
OSRHSB-1	1ltr	-5840A
OSRHSB-5	5ltr	-5842C
Suitable for Tarmac & Asphalt		
OSRTA-1	1ltr	-5858A
OSRTA-5	5ltr	-5860C

LUBRICANTS & CHEMICAL PRODUCTS

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

671

© 2018

SOLENT MAINTENANCE Cleaner Spray

SC1-500B Industrial Rapid Dry
Solent rapid dry solvent cleaner is supplied in a large 500ml aerosol. The product is formulated to quickly penetrate grease, oil and general soiling from metal/electrical components and precision parts. The formulation rapidly evaporates leaving a clean, dry surface. Safe on most plastic components. Will soften some lacquers. If in doubt about suitability test on a scrap component or a small area before general application.



Product Number	Size	Order Code
SC1-500B	500ml	-0100K

Low Odour Cleaning Solvent
SC2-500B

Powerful solvent product. Very fast drying with a good compatibility with most materials. Designed for the engineering and electrical industries. As with all solvents test for compatibility before general application. The low odour level is ideal for cleaning items where product odour would be inappropriate.



Size	Order Code
500ml	-9640K

Metal Parts Cleaner

SC3-500B
Citrus based solvent cleaner. Citrus cleaners are an effective alternative to pure solvent products. Deep penetrating action rapidly removes oils/grease/and general soiling. Supplied in a 500ml for economy.



Size	Order Code
500ml	-9660K

SOLENT OFFICE Air Duster

HFC-free. Designed to remove dust and dirt from hard to reach areas. Environmentally friendly, does not contribute to global warming. Extension tube included.



Size	Order Code
400ml	-6800A

Sticky Label Remover

LR1-250B
Designed to quickly and effectively remove old and difficult to remove self adhesive labels from a wide variety of surfaces. Formulated with extra strength for the industrial user. Rapidly removes labels from, metal, tile, ceramic, powder coated and glass surfaces. Also removes chewing gum, marker pen ink, and ball point pen ink.



Size	Order Code
250ml	-9630K

SOLENT MAINTENANCE Graffiti Remover

SG1-500B
An aggressive graffiti remover suitable for cleaning the following surfaces: polyethylene, polypropylene, nylon, UPVC, bare metal surfaces, powder-coated surfaces, varnished wood, reflective signs and acrylics. May be used on some gloss paints (small test area first advised).



Size	Order Code
500ml	-0300K



INDUSTRIAL CLEANERS & SOLVENTS

GROUP
732

SOLENT Cleaner Spray

SC2-500C Electrical Contact Cleaner Spray - Trike-free

An effective solvent based cleaner. The product is formulated to remove oil, grease and carbon dust from electrical switch gear and electronic components. It is safe on most common plastic parts, but will attack lacquer finishes and coatings. If in doubt about suitability, trial the product on a scrap sample first before general application. The product is propelled from the aerosol by CO₂ carbon dioxide gas (non-flammable). Electrical Switch Cleaner fluid is flammable. Always ensure power is switched off before applying this product to electrical equipment.

Product Number	Size	Order Code
SC2-500C	500ml	-0120K

Foam Cleaner Anti-Static Spray

SC5-500B

Cuts through grease, dirt, oil and general soiling, contains no silicones. Ideal for non-porous surfaces. 1000+1 uses in the home, industry, garage or factory.



Container Number	Size	Order Code
SC5-500B	500ml	-0180K

ACTION CAN Pistol Grip Can Holder & Sprayer

For aerosol sizes 300ml/ 400ml/500ml cans. Protects hands from cold cans and chemical contact.

new



For Aerosol Size (ml)	Order Code
300/400/500	-9500K



Trike-free Contact Cleaner

CCA500C Electrical Contact Cleaner Spray - Trike-free

Suitable for cleaning and degreasing delicate components such as those used in electrical equipment. It can be used on most surfaces and will not effect PCBs, delicate plastics or painted surfaces. Non-corrosive. It contains only solvents which are permitted under the Montreal Protocol.

Product Number	Size	Order Code
CCA500C	500ml	-3120K

Antistatic Foam Cleaner

FCA500

This cleaner is recommended for the everyday cleaning of electronic and electrical equipment. It removes stubborn stains, nicotine, grease and general grime build-up from plastic, formica, leatherette, ceramics, glass, paintwork or any other non-porous hard surface. Ideal for use in offices, canteens, banks, schools, kitchens, washrooms and many other problem areas. It has been formulated from surfactants and solvents which are safe to use on most surfaces.

Container Type	Size	Order Code
Aerosol	500ml	-3180K



LUBRICANTS & CHEMICAL PRODUCTS

ACTION CAN Trike-free Cleaning Solvent

TF-90
Formulated to replace trichloroethylene-based solvent cleaners. Rapid dry formula will remove oil, grease, tar, carbon and general soiling. Suitable for electrical part cleaning, electronic part cleaning and general degreasing work etc. Cans printed in English, French and German suitable for supply in the EU.

new



Size	Order Code
500ml	-9200K

Electronic Cleaner Plastic Safe

IPA
An effective formula for removing dirt and tape oxides from audio and video recording heads. Suitable for removal of carbon deposits from photocopy equipment. Effectively absorbs moisture from electronic component PCBs. Meets the following approval **BS1595, ASTM D 770, DIM53245.**

new

Size	Order Code
500ml	-5800K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



**Chain & Drive
Spray Lubricant**

500
ml

SM6-500B

Formulated to have a wide range of operating uses. Ideal lubricant for moving chains under extreme load and for chains not fitted with automatic lubrication nor running in oil baths. Formulated with a 'tacky additive' to resist 'throw off' on rapidly moving chains and drives. Ideal for fork trucks/conveyer systems/motorcycle chains. Can be used as a general-purpose lubricant for items subjected to extreme weather conditions. Can be used as a slide-way lubricant for machine tools. Strong anti-rust qualities. Does not contain silicone or CFCs.



Product Number	Size	Order Code
SM6-500B	500ml	SOL-732 -0500K

Drive Belt Dressing Spray

SB1-500B

Reduces slip on drive belts and helps to stop belt squeal. Can be used on drive belts exposed to weather, ideal for farm machines, alternator drive belts and fan belts. Helps to stop cracking and extends belt life. Can be used on rubber, leather, canvas and most types of synthetic belts.



500
ml



Product Number	Size	Order Code
SB1-500B	500ml	SOL-732 -0060K

LUBRICANTS & CHEMICAL PRODUCTS



**Heavy Duty System
Cleaner**

Grade SC-SYSTEM

For cleaning water-based operating fluids and coolants from central systems or individual machines. Free of secondary alkanolamines, heavy metal compounds, phenols, hexahydrotriazine and nitrite. Storage temperature of 5 to +40°C. **NOTE:** So-Clean System at 1- 2% is added to the used operating fluid about eight to twelve hours before draining. Soil in machines, tubes and reservoirs of the system are loosened and re-emulsified. For heavily soiled systems, increasing the dwell time to 24 hours is recommended. Thick sediment deposits are best removed mechanically and rinsed off with clean water. Supplied in 20ltr stacking poly container.



20
LTR



Size	Order Code
20ltr	SOL-740 -4800B

**Chain & Drive
Lubricant**

CD-90

For all types of driving chains, bearings, conveyor systems and fast moving load-bearing parts. Temperature range 30°C to 150°C. Excellent anti rust performance. Cans printed in English, French and German suitable for supply in the EU. No solvent content for maximum value.

500
ml



Size	Order Code
500ml	ACN-732 -2250K



**Chain & Drive
Spray**

CCA500

This product is a special blend of quality oils, greases and solvents, designed to lubricate and protect all types of cables and slow moving chains. It penetrates quickly into the centre of cables providing excellent protection to the core. It will not sling off, drip or dry out even in adverse conditions. It will also penetrate chain rollers and links enabling smoother working and reduce friction, wear and the possibility of seizure.



Size	Order Code
500ml	SSF-732 -3500K

Wire Rope Lube Spray

WRS500

This spray lubricant has been formulated to lubricate and protect wire ropes from corrosion. It has good penetrative qualities to lubricate deep into the core of ropes, displacing water and increasing the life of the rope. 'Hi Tack' additives provide excellent adhesion to metal and reduced 'fling off' during use.



Size	Order Code
500ml	SSF-732 -3450K



MOULD RELEASE AGENTS/LUBRICATING OILS



Silicone Release Spray

SP-90 Superior non toxic lubricant. Low odour and non staining. Reduces friction and static. Wide operating temperature -50°C to 200°C. Protects against corrosion and oxidation. Cans printed in English, French and German suitable for supply in the EU.



500 ml

Size	Order Code
500ml	ACN-732 -9000K



Silicone Release Spray

SR1-500B - For Plastics & Rubber Formulated with a high silicone content. Suitable for a wide range of uses. SR1-500B is a dry, non-oily, non-greasy product. Water clear with no odour.



500 ml

Size	Order Code
500ml	SOL-732 -0700K

Thermoplastic Silicone Based Release Agent

SR6-500B - Thermoplastic Formulated to provide effective release of plastics with lower melt temperatures. Effective with natural rubbers. Effective to 200°C, excellent surface finish.



500 ml

Size	Order Code
500ml	SOL-732 -9720K

Machine Oil

General purpose oil spray for all around use in factories and workshops. Approval number 179680C. Does not contain any Allergens. CFC free. Cans printed in English, French and German suitable for supply in EU.



415 ml

Size	Order Code
415ml	ACN-732 -7840K

Polyurethane Silicone Release Fluid

SR4-500B - For Polyurethane For use with integral skin and elastomeric polyurethanes. Provides high gloss finish, low build-up on the mould surface generated to 200°C. Very low odour. Silicone based product may not be suitable for use where painting, plating work is required.



500 ml

Size	Order Code
500ml	SOL-732 -9700K

Multi-Purpose Oil Spray C02

SM3-500C Multi-purpose mineral lubricating oil formulated to have a wide operating range. It lubricates, penetrates, cleans and protects. Use on locks and hinges. Cleans and protects tools. Helps to release stubborn and rusted bolts. Does not contain silicone or CFCs.



500 ml

Size	Order Code
500ml	SOL-732 -0450K

Synthetic Lubricating Oil with PTFE

SL-90 Fully synthetic. Strong anti-filing properties. Wide operating temperature from -35°C to +200°C. Multi viscosity capability. Good metal to metal parts lubrication. Water, steam, acid and alkalis resistant. Corrosion inhibitor built-in. Clean and clear. Silicone- and CFC-free. Cans printed in English, French and German suitable for supply in EU.



500 ml

Size	Order Code
500ml	ACN-732 -8880K

Non-Silicone Release Agent

SN1-500B - For Plastic & Rubber Specifically formulated for rapid release of moulded components. Particularly suitable for moulded items which require further process. Painting, printing and thermo welding.



500 ml

Size	Order Code
500ml	SOL-732 -9680K



Air Tool Lubricant

Excellent air release quality, low foaming ability and resists clogging. Contains anti-rust and anti-wear additives. Extremely resistant to water absorption and can be mixed with all mineral oil based lubricants without draining the system. ISO Grade VG22.



Size	Order Code
500ml	KEN-732 -8000K
5ltr	KEN-732 -8050K

LUBRICANTS & CHEMICAL PRODUCTS

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



Anti-Rust Protection Spray

A soft thin film moisture/corrosion protective coating. The coating has a slight green colouring which clearly indicates treated areas. Ideal for longer term moisture/corrosion protection of machined components/moulding dies and tools. Removed easily with Solent Industrial Cleaner.



Product Number	Size	Order Code
SP1-500B	500ml	-0600K

Dry Moly Spray

Premium grade dry molybdenum particle lubricant. Fast drying. Ideal for fastener lubrication. Effective on all grades of steel, copper, brass, stainless steel and foundry equipment where high temperatures up to 450°C are common. Also for open gear lubrication and any location where a wet coating is not acceptable or would burn off. Works at up to load rates of 100,000psi. No silicone content.



Product Number	Size	Order Code
SD1-500B	500ml	-0200K

Penetrating Spray

SM1-500B
Rapidly penetrates into rust and corroded fittings. Can be used on wet metal components, does not contain silicone, CFCs or chlorine. Lubricates threads during release procedure, 30% less dense than water.



Size	Order Code
500ml	-0400K



Penetrating Spray

POA500
For dismantling, lubricating and cleaning. This oil displaces water leaving a hydrophobic coating to protect surfaces from corrosion. It penetrates threads and lubricate delicate mechanisms, pivot points and sliding surfaces whilst degreasing hard surfaces.



Size	Order Code
500ml	-3400K

LUBRICANTS & CHEMICAL PRODUCTS

Heavy Duty Anti-Rust Protection Spray

High performance corrosion inhibitor, sprayed directly onto the surface to be protected. Light brown in colour to identify treated surfaces. The film has self-healing properties and is easily removed with solvent cleaners. Coating resists moisture, acid and alkali fumes. The film does not contain silicone or halogens. Corrosion protection periods vary with environmental conditions. Typical interior protection in the UK in excess of two years.



Product Number	Size	Order Code
SP2-500B	500ml	-0620K

Food Grade Anti-Galling Lubricant

AG-90
An extreme pressure rated lubricant. Formulated to prevent galling and cold welding of stainless steel, titanium, aluminium fasteners. Particularly effective when used with powered nut runners. The product is reinforced with PTFE DuPont food grade.



H1 Food Grade approved InS registered #1796317.



Container Type	Size	Order Code
Oil can	200ml	-0610K

Galvanising Spray

Fast drying corrosion protection. Matches colour of newly galvanised metal. Ideal for protecting welding joints. Can be used as a top coat or primer. Compatible with most paint finishes. Contains no CFCs or lead.



Manufactured and tested to:
ASTM B117 (Hot Salt Spray)
BS AU 148:PT14 1969 (Natural Weathering)
DIN EN ISO 12944-1 (Corrosion Protection of Steel Structures)

Product Number	Size	Order Code
SZ1-500B	500ml	-0900K

Copper Grease Spray

Copper grease spray is particularly effective on commercial/passenger vehicle braking systems. Extra heavy-duty copper grease with graphite. High copper content - effective up to 1100°C. No lead content/no CFCs/no silicone/no chlorinated content. Directional spray button for precision application.



Product Number	Size	Order Code
SM7-500B	500ml	-0520K

Copper Anti-Seize Grease with Graphite

CS90
High quality grease. Free from lead, zinc, nickel and silicone. Contains micro fine copper flakes and micro fine graphite flakes. Increased lubrication with added graphite. Very high temperature resisting rate. Waterproof, anti-corrosion, anti-rust, anti-acid and heat resistant.



Container Type	Size	Order Code
Aerosol	500ml	-3000K
Tub	500ml	-3010K



Cold Galvanising Spray

Matches colour of newly galvanised metal. Ideal for protecting welding joints. Can be used as a top coat or primer. Compatible with most paint finishes. Contains no CFCs or lead.



Product Number	Size	Order Code
CGA500	500ml	-3900K

SITESAFE

Leak Detector Spray

For checking for the most minute leaks in any gas or air pressurised systems including commercial vehicle air brakes and pressure vessels. Contains no alcohols or solvents, is not caustic and contains a rust inhibitor. Spray directly onto the suspect area using the extension tube and examine for bubbling which will indicate leakage.



Product Number	Size	Order Code
LDA500	500ml	-3340K

ACTION CAN Leak Detector Spray & Gel

Designed to identify even the smallest gaseous leak. Bubbles in the applied film indicate location of the leak. Suitable for use with most common industrial gases. Meets **BS EN 14291:2004**. Complies with MoT regulations. Does not contain mineral oil or Ammonia. Cans printed in English, French and German suitable for supply in the EU.



Product Number	Size	Order Code
LD-90 (Spray)	400ml	-6200K
LD-90 (Gel)	250ml	-6190K

ACTION CAN Anti-Spatter Spray

AS-90
Prevents build-up of weld spatter on work, nozzles, jigs and fixtures. Fast acting.

Multi-Use Fluid:

- Welding wire (MIG) lubricant.
- Post weld corrosion protector.
- Silicone- and CFC-free.
- Easy to wipe or rub away.
- Non-flammable product.
- Non-flammable propellant.



Product Number	Aerosol Size	Order Code
AS-90	400g	-1000K

SOLENT MAINTENANCE

Leak Detector Spray

A specially formulated, performance white fluid, designed to identify even the smallest gaseous leak. Applies a thin uniform film of surface active agents which identifies any leak or bleeding of joints. Bubbles in the film indicate the location of the leak. Will not give a false reading if mechanical sensing equipment is used. Suitable for use with most common gases.



Product Number	Size	Order Code
SL1-400A	400ml	-0340K

Fault Detector Freeze Spray

Fault Detector Freezer spray is a very cold rapidly evaporating high pressure gas jet. Applying to electronic components will lower the temperature of the component. Any faulty overheating component will cool and return to correct operation, thus indicating the faulty component. Cools objects very rapidly down to temperatures of -50°C. Can also be used to shrink fit metal parts where the application of heat would be inappropriate and can be used to freeze chewing gum deposits to aid removal.



Product Number	Size	Order Code
SFC-415F	415ml	-9580K N/A

Welder's Anti-Spatter Spray

During welding small blobs of molten metal (spatter) fall either side of the weld. This spray is applied before welding to prevent spatter sticking to the metal. CO₂ propelled aerosol. Silicone-free and removable with solvents prior to galvanising or painting.

Multi-Use Fluid:

- Welding wire (MIG) lubricant.
- Post weld corrosion protector.
- Silicone- and CFC-free.
- Easy to wipe or rub away.
- Non flammable product.
- Non flammable propellant.



Product Number	Size	Order Code
SW1-400C	400ml	-0840K

3-Part Flaw Inspection System

Fast reliable method for visually inspecting and spot-checking surfaces of welds, exotic alloys or standard metals, highly stressed structural members, critical castings, shafts, gears, spindles and any other hard part where identification of surface flaws is essential. Detects flaws such as cracks, pin holes, welding laps and porosity either during manufacture or on-site.

**BIG VALUE
500ml Cans!**



Flaw Detector Cleaner Spray

Quick drying, powerful solvent for cleaning surfaces prior to testing. Removes contaminants including oils, greases and grime.

Product Number	Size	Order Code
SF1-500B	500ml	-0240K

Flaw Detector Dye Penetrant

Highly sensitive red dye, for use when detecting flaws on metal components under normal lighting conditions.

Product Number	Size	Order Code
SF2-500B	500ml	-0260K

Flaw Detector Developer

White film to highlight any faults which have been detected when using Flaw Detector Penetrant. The product should be removed using Flaw Detector Cleaner Spray once cracks have been found and marked.

Product Number	Size	Order Code
SF3-500B	500ml	-0280K

Maintenance Welder's Anti-Spatter Fluid

Reduces the risk of joint puddling and greatly reduces preparation time prior to final painting. Does not affect any subsequent galvanising or painting operations. Evaporates under normal weld temperatures. Dichloromethane and silicone-free. Non-flammable, non-toxic, non-corrosive and biodegradable.



Size	Order Code
5ltr	-9300K
20ltr	-9310K

GROUP 732 AUTOMOTIVE MAINTENANCE & REPAIR

SOLENT MAINTENANCE Spray

SM4-500C 'M4 Plus'
 High performance mineral oil based lubricant with PTFE. Helps start damp engines and releases rusty fixings. Cleans metal surfaces and prevents rusting of treated parts. Does not contain naphtha, kerosene or paraffin which are all associated with operator skin dryness, cracking or dermatitis. CO₂ non-flammable propellant. Does not contain silicone. Electrically non-conductive at normal ranges found in the home. Care must be taken if used on electrical plastic components where 'crazing' may occur.



500 ml

Product Number	Size	Order Code
SM4-500C	500ml	-0460K

ACTION CAN Maintenance Liquid

AC-90
 Displaces water, helps start damp engines, penetrates rust, protects from corrosion, lubricates and stops squeaks. Silicone free, electrically non-conductive and can be used on or near electrical components, motor circuits etc. Aerosols that use no CFCs and are ozone friendly or in screw top metal cans and drums.



Does Not Contain Kerosene, Paraffin or Naphtha.

Product Number	Size	Order Code
Aerosol	250ml	-0050K
Aerosol	425ml	-0150K
Aerosol	500ml	-0180K
Can	5ltr	-0200K
Applicator		-0500K

LUBRICANTS & CHEMICAL PRODUCTS

SOLENT MAINTENANCE

De-Icer

A fast acting de-icer, perfect for those frosty mornings or evenings. The effective formula helps prevent the windows from re-freezing and works to temperatures of -20°C. Handy sized aerosol can that's quick and easy to use.



Size	Order Code
600ml	-9550K

Deluxe Ice Scraper

Tough one piece scraper for the effective removal of snow and ice.

Width: 95mm.
Length: 210mm.



600 ml

Order Code
SOL-907
-4520K

KENNEDY Filler Applicators

100mm wide plastic spreader, suitable for the application of auto body filler.



5 PIECES

Size	Order Code
100mm (4")	-2820K

ACTION CAN Supertrol Rust Proofing Fluid

Rapidly penetrates into welded seams and metal to metal joints. Displaces water and seals the surface to prevent corrosion. Used to protect all internal sections including door panels and sill section. Does not harden or crack. Flexible water repellent coat gives all weather protection.



500 ml

new

Product Number	Size	Order Code
001	500ml	-8260K

Genuine Chamois Leather

Size: 60 x 30cm.



Weight each	Order Code
60g	KEN-907
	-4130K

Auto Body Filler Applicator Set

4 Piece Set
 Spring steel blades with composite grips. Suitable for the application of auto body filler.

Blade widths: 12, 25, 50 and 75mm.

Size (W x H x D): 123 x 210 x 5mm.



4 PIECES

Order Code
KEN-503
-2825K



Dashboard Shine

Designed for cleaning, polishing and protecting dashboards and interior and exterior trims. It restores original colour and leaves a high shine finish with a fresh strawberry fragrance. Ideal for use on plastic, vinyl and rubber. Easy to use with a spray-on and wipe application.


500 ml

Size	Order Code
500ml	-9440K

Leather Cleaner

Enriched with Carnauba wax and Beeswax to clean, condition and protect a car's leather interior. Regular use will help maintain suppleness and prevent leather from drying and cracking. Spray-on application makes it easy to use and it is water resistant and non abrasive.


500 ml

Size	Order Code
500ml	-9450K

De-ionised Water DW25

For use in lead-acid car batteries. Also suitable for domestic appliances such as steam irons and steam cleaners, avoids problems caused by scaling. Can be used as a final rinse in car washing to avoid 'spotting'. Also suitable for rinsing scientific glass-ware.


25 LTR

Size	Order Code	N/A
25ltr	-4250K	N/A



Concentrated Screen Wash

The anti-smear formula leaves a crystal clear windscreen with every wash and resists freezing, ideal for winter motoring. Contains water softeners.

Dilution Recommendation

Summer: 25% 1 part wash to 3 parts water.

Winter: 50% 1 part wash to 1 part water.

Harsh Winter: use neat.



Product	Size	Order Code
Concentrated	5ltr	-9400K
Screenwash	25ltr	-9420K

Wash & Wax

High foam, high gloss vehicle shampoo. Mild formula, neutral pH, water-based. Effectively lifts traffic film without harm to polished paintwork and trim. With foam boosters for fast removal of dirt and grease. High gloss wax finish. Can be used with hot or cold pressure washing systems or hand washing. Easy to handle container.



Type	Size	Order Code
Poly Bottle	5ltr	-6500A
Plastic Drum	20ltr	-6510B

Traffic Film Remover Concentrate

Effectively removes dirt, grime, grease and tenacious traffic film from all vehicles. Suitable for cleaning chassis and bodywork on vehicles. Designed for high pressure washing with mechanical power wash systems. Concentrated formula can also be used to clean machinery, floors, walls, asphalt, will also remove co-polymer waxes used in new car production.



Type	Size	Order Code
Poly Bottle	5ltr	-6400A
Plastic Drum	20ltr	-6410B



Window Cleaner

Simply spray on and wipe off to leave windows clean and sparkling. Contains vinegar for extra cleaning and a demisting additive.



750 ml

Size	Order Code
750ml	SOL-780
	-3025M

Brake Cleaner MP7116

A fast drying, solvent based, heavy duty degreaser designed to remove dust, grease and oil from brake components and clutch assemblies. Eliminates brake squeal and clutch slip caused by contaminated components. Easy to use 360° spray application.



600 ml

Size	Order Code
600ml	SOL-732
	-9520K



Sherwood STD

Fluid Spray

Non-soluble tapping and drilling aerosol spray that penetrates and clings to normally inaccessible areas and moving cutting edges.



400 ml



GROUP
085

Lubricant Type	Size	Weight per 12	Order Code
Spray	400ml	5.1kg	SHR-732
			-4000K

Sherwood STD Liquid (Poly Bottle)

Low odour liquid. Coats the cutting edge with a film of EP additives.

Sherwood STD Compound

Low melting point paste maintains a continual lubricant feed to the cutting edge. Hand applied. Suitable for the most severe cutting operations.



Lubricant Type	Size	Order Code
Liquid	500ml	SHR-732
Liquid	5ltr	-4020K
Compound	500g	-4060K
		-4040K

LUBRICANTS & CHEMICAL PRODUCTS



Alloy Wheel Cleaner

Cleans hardened brake dust, dirt and road grime that accumulates on alloy wheels. Powerful, acid-free formula to remove grease and oil.



500 ml

Size	Order Code
500ml	SOL-732
	-9430K



Brake & Clutch Component Cleaner

BC90

A fast evaporating effective cleaner for brake components. Effective formulation for suppressing dust and debris. Kind to skin.



500 ml

Size	Order Code
500ml	ACN-732
	-1500K

Tyre Shine

Durable, long lasting formula is designed to give used tyres a 'new look' deep gloss shine while helping to prevent weathering and fading.



500 ml

Size	Order Code
500ml	SOL-732
	-9460K

STD Tapping & Drilling Non-Soluble Foam Lubricant

Foam aerosol penetrates and is able to cling to normally inaccessible areas and moving cutting edges. Can be used on yellow metals without the risk of staining.



400 ml

Lubricant Type	Size	Order Code
Foam	400ml	SHR-732
		-4210K

KENNEDY Industrial Paint Markers

Designed for countless metal marking applications. Can be used for marking greasy, rusty, or new metal surfaces. Also suitable for marking glass, plastic, wood, ceramics etc. Ballpoint nozzle cap will only allow ink flow when applied and pressed to the workpiece. One head can be interchanged from differing inks and bottles. Can be refilled.

Please note, colours are for guidance only.



Colour	Size	Order Code KEN-734
Yellow	46ml	-3020K
White	46ml	-3040K
Blue	46ml	-3060K
Green	46ml	-3080K
Black	46ml	-3100K
Red	46ml	-3120K
Orange	46ml	-3140K

Colour	Size	Weight each	Order Code KEN-734
Yellow	1ltr	1.4kg	-3210K
White	1ltr	1.4kg	-3230K

Ballpoint Head

Replacement ballpoint head for Kennedy Industrial paint 46ml marker bottles.

Material	Ball Size	Order Code KEN-734
Nickel	2.4mm	-3500K



STUARTS Micrometer Paste

Oil-based paste for indicating high spots on machine bearings, machine tool beds etc. Easily removable with methylated spirit.



Colour	Pack Size	Order Code MIR-734
Blue	32g Tube 38g Tin	-8810B -8800A

SOLENT Industrial Paint Markers

Bullet Tipped
For use on steel, aluminium, rubber, timber, plastic, ceramics and other materials. Bullet tipped. 2.3mm point size.



**BEST
SELLER**

All Prices are per Paint Marker

Colour	Order Code SOL-734
Green	-0030K
White	-0050K
Yellow	-0060K

MARKERS - PAINT/LINE

Layout Fluid

Industrial methylated spirit based.

Transparent

For use on bright metals. The scribed or scored lines show clearly without chipping.

Opaque

For use with heavy and black metals. When scribed or scored the dark metal shows up well against the film. Can also be used for colour coding.

Please note, colours are for guidance only.



Colour	Size	Weight each	Order Code KEN-735
Transparent			
Blue	1ltr	1.1kg	-0100K
	5ltr	5.4kg	-0200K
Opaque			
Yellow	1ltr	1.1kg	-0700K
	5ltr	5.4kg	-0800K
White	1ltr	1.1kg	-1000K
	5ltr	5.4kg	-1100K
Blue	1ltr	1.1kg	-1300K
	5ltr	5.4kg	-1400K

Remover

Industrial methylated spirit based blend for easy removal and minimum residual effect.



Size	Weight each	Order Code KEN-735
1ltr	1.10kg	-2100K
5ltr	5.40kg	-2200K

KENNEDY Line Markers

For use on car parks, playgrounds, sports fields, road surfaces etc. For stencils, line or free hand marking. CFC free formula, contains no lead additives, compatible with major brand applicators. Will give 60-100 metres of a 50mm line when used in a standard machine.



750ml Can

Please note, colours are for guidance only.

Colour	Application	Order Code KEN-734
White	General Marking	-6020K
Yellow	Hazard/Caution	-6040K
Blue	Mandatory	-6060K
Red	Prohibition/Danger	-6080K
Green	Safe Condition/Direction	-6100K
Black	Deletes Existing Lines	-6140K
Grey	Deletes Existing Lines	-6160K

Line Marking Gun

Manufactured from reinforced nylon. For offering trigger action to line marking spray cans, giving improved comfort during prolonged use.



Order Code
KEN-715
-6200K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



Soluble Cutting Oil - Aluminium

So-Cool 'Plus' Aluminium

Semi-synthetic, environmentally improved – does not contain sodium nitrite, phenols, triazene, PTBBA or chlorinated additives. Enhanced sump life and excellent anti-foam characteristics. Optimum tool life on the most arduous jobs. Excellent corrosion protection and lubrication to cutting areas, machine fixtures, slides etc. Low emulsion odour. Low drag out losses. Easily removed in splash areas. Resists the formation of aluminium soaps - Improves filtration and machine cleanliness.

Recommended concentrations:

General machining 7% or (a dilution of 14 to 1). Heavy duty machining 10% or (a dilution of 10 to 1).
Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740
SC-ALU	20ltr	-4533B

Soluble Cutting Oil Multi-Purpose

So-Cool 'Plus' GP

Environmentally improved - does NOT contain phenols, boron, triazene, PTBBA or chlorinated additives. Based on highly refined mineral oils. High degree of machine tool lubrication. Ideal for a wide range of machining operations. Low odour. Low unit cost. Specially formulated for use in both hard and soft waters.

Recommended concentrations:

General machining 7% (dilution of 14 to 1). Grinding (surface, cylindrical centreless) 2 - 3% (dilution of 50 to 1 or 33 to 1).
Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740
SC-GP	20ltr	-4508B

Soluble Cutting Oil - Cast Iron

So-Cool 'Plus' Iron

Semi-synthetic formulation. Excellent anti-foam characteristics. Environmentally improved - does NOT contain sodium nitrite, phenols or chlorinated additives. Excellent sump life and corrosion protection. Superb tramp oil rejection characteristics. Enhanced tool tip life. Low drag-out loss - highly cost effective in use. Based on highly refined mineral oil. Increased detergency.

Recommended concentrations:

General machining 5% or (a dilution of 20 to 1). Arduous operations/difficult materials 7% or (a dilution of 14 to 1). Grinding 3% or (a dilution of 33 to 1).
Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740
SC-CAST	20ltr	-4563B

Soluble Cutting Oil - Stainless

So-Cool 'Plus' Stainless Steel

Environmentally improved - does NOT contain phenols, boron, triazene, PTBBA or chlorinated additives. Based on highly refined mineral oils. High degree of machine tool lubrication. Ideal for a wide range of machining operations. Low odour. Low unit cost. Stable emulsions in very soft and very hard water.

Recommended concentrations:

General machining 7% (dilution of 14 to 1). Heavy machining 10% (dilution of 10 to 1).
Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740
SC-INOX	20ltr	-4600B

Soluble Cutting Oil - Aerospace

So-Cool 'Plus' Aerospace

Specifically designed for use in the aerospace industry on all high performance alloys, Stainless steel, titanium and aluminium alloys - in particular series 7000 aluminium.

Advantages/Benefits:

Nitrite and chlorine-free. Secondary and tertiary amine-free formulation. Reduced risk of staining and corrosion. Long sump life. Emulsifiable residues to promote clean working environment. Does not contain PTBBA.

Approvals:

AIRBUS ABR 9-0204.
The military division of British Aerospace.
Turkish Aerospace Industries (TAI).



Grade	Size	Order Code SOL-740
SC-AERO	20ltr	-4570B

Soluble Grinding Oil - Synthetic

So-Cool 'Plus' Syn Grinding

Fully synthetic formulation. Long working life therefore economical. Minimises wheel glazing. Effective corrosion resistance. Stable emulsions in soft and hard water. Does not contain PTBBA.

Recommended concentration for general machining operations:

Grinding Cast Iron 2 % to 3.5% (dilution of 50 to 1 or 30 - 1).
Steel and Ni/Cr steel 2% (dilution of 50 - 1).
Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740
SC-GS	20ltr	-4620B

Slideway & General-Purpose Lubricant Oil

Grade VG68

Excellent lubricating properties under high pressure working conditions. Anti-wear additives. Lubricates and flows freely even at very low temperatures. 20ltr stacking poly container.

Grade	Size	Order Code SOL-740
VG68	20ltr	-4368B



With stainless steel Venturi pump. Screws into 205ltr oil drums. Uses compressed air to create a powerful vacuum. Empties liquid and suspended solids from tanks and can fill a drum in as little as 90 seconds, making it ready for appropriate disposal. Shuts off automatically when done.



Product
Number
PM175K

Order Code
SOL-740
-8940G

So-Grease EP2

High load lead-free lithium grease. Contains anti-rust additives to protect against corrosion. Anti-oxidants included to prolong product life. High ageing stability/high oxidation stability. Supplied in 400g, 5kg, 12.5kg or 50kg containers.



Pack
Type
Cartridge
Tub
Pail

Size
400g
5.00kg
12.5kg

Order Code
SOL-740
-5100K
-5105C
-5110M

PROCESS & SYSTEM CLEANERS/GREASES
**GROUP
740**
Water Mixer

Water and chemical mixing equipment system that is approved for use by the water regulation authority (WRA) to prevent the possibility of back flow. This is to safeguard against the possibility of chemicals finding their way into the mains water supply. Mixes water and chemicals to metered concentrations with approved air gap back flow prevention incorporated into the unit. Offers an economical way of blending chemicals directly from the mains water system without the requirement for any additional pipe-work, non-return valves or back flow prevention systems.

new


Product
Number
SM9100

Order Code
SOL-740
-9100K

Tramp Oil Belt Skimmers

Designed to effectively and simply remove tramp oil floating on the surface of cutting fluid. Prevents the 'Monday morning smell', extends coolant life and reduces the risk of dermatitis. Compact units fit to the side or above the tank. 240V. Supplied with plug. Product FT400 can be run continuously.

Overall length: 440mm (from top of bracket to bottom of belt).

Maximum insertion depth: 150mm.

Case dimension (L x W x D):

80 x 80 x 502mm.

Belt width: FT300 = 30mm; FT400 = 40mm.


FT400

FT300

Product
Number
FT300
FT400

Removal
Rate
3ltrs per hr
4ltrs per hr

Order Code
SOL-740
-8860B
-8880D

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR
683



Maintenance Liquid Food Grade

AC90-FG
Food grade multi-purpose maintenance liquid industrial strength lubricant and cleaner. Can be used safely in all food processing locations where both incidental and direct food contact may occur. Essential for safe operations and manufacturing for pharmaceutical, food and beverage industries. Does not contain silicone and CFC. Tasteless and odourless. Holds **NSF** and **InS** approvals for use in food areas 3H and H1 grade.

425 ml



Food Safe Lubricating Oil

This lubricant is completely clear, odourless and food safe, it contains no mineral hydrocarbons and meets with **FDA** and is **INS H1 registered**. It is a hydrophobic oil and therefore does not take in water, providing a barrier between water condensation and metal surfaces. This versatile lubricant can be used on sliding and rolling element bearing surfaces, metal, wood and plastics. Non-flammable. Non-toxic. Anti-corrosive. Safe for use at temperatures from -60° to +260°C.

Size	Order Code
500ml	SOL-740 -5960G



Food Safe Anti-Seize Paste

Formulated for use on assemblies in difficult areas where fretting corrosion and corrosion induced by wet environments occur. It can also be used to lubricate slow moving slides and pivot pins. Resistant to hot, cold and salt water it can be used across a wide temperature range where the solid lubricate including PTFE gives excellent dry lubrication and forms a barrier between all surfaces. Non-toxic, it complies with **FDA** regulations and is **H1 registered**.

500g



Grade	Size	Order Code
FSASP	500g	SOL-740 -6720B

LUBRICANTS & CHEMICAL PRODUCTS

Food Safe Penetrating Oil

For dismantling, lubricating and cleaning. This odourless oil is tasteless and displaces water leaving a hydrophobic coating to protect surfaces from corrosion. It penetrates threads and crevices to release and lubricate delicate mechanisms, pivot points and sliding surfaces whilst degreasing hard surfaces. Can be used as a light lubricant. **FDA Compliant. INS H1 registered.** Food safe. Synthetic translucent. Tasteless water white fluid. Non-toxic. Anti-corrosive.



Size	Order Code
500ml	SOL-740 -5930D

Food Grade Chain & Drive Lubricant

CD90-FG H1
Holds **H1** Food grade certified by **NSF #143540**. **3H & H1** incidental and direct food contact **InS 1795390**. Water displacing properties ideal for wet and damp conditions. Highly water resistant and repellent. Anti-fling properties. Strong anti-rust capability. No added solvent. Silicone- and CFC-free. Temperature range -12°C to 200°C base product.

500 ml

Size	Order Code
500ml	ACN-732 -2260K

Food Safe White Grease

Intended use for lubrication of bearings, slides and all delicate mechanisms used in the food manufacturing/ processing industry. Maximum operating temperature 150°C with excellent load carrying capacity and water resistance. Non-toxic. **FDA Compliant. INS H1 registered.**

500 ml



Food Safe Belt Dressing

This **H1 registered** product is designed to extend life of leather, rubber and synthetic belts. Cleanly applied from the 500ml aerosol, it improves grip and allows the belt to transmit full power without slipping even in wet and damp environments.



Size	Order Code
500ml	SOL-740 -6760F

Food Safe High Tech Grease

Fully synthetic translucent non-melting grease that allows fluid to penetrate into machine parts before setting to a No. 2 rated grease. Protects and lubricates with a non-toxic anti-corrosive shield. Non-toxic lubricant ingredients listed by the **FDA regulations** and are **INS H1 registered**. Totally salt or fresh water-resistant to be used inside and out on machinery in temperatures ranging from 40°C to +340°C.

500 ml



Size	Order Code
500ml	SOL-740 -6220C



Size	Order Code
500ml	SOL-740 -6850E



FOOD SAFE OILS & GREASES/FOOD SAFE CLEANERS

SOLENT HYGIENE FOR FOOD Synthetic Grease

Constructed using pure non-toxic synthetic base oils, combined with PTFE and a complex mix of anti-oxidant and EP packages. Completely resistant to salt water and high humidity environments. Dielectric and can be used to protect electrical equipment from ingress of water. Lubricates bearings, chains and sliding surfaces including plastic bearings and runners. Has a wide temperature operating range -40°C to 340°C. Grease clean food safe lubricant. Non-melting.



Size	Order Code
100ml	-6200A
400ml	-6210B

Food Safe Silicone Grease

A versatile silicone grease for operation in extremes of high and low temperature. Can also be used on food pptance as it offers excellent physical performance and is **INS H1 registered**. Non-melting, water repellent, odourless, non-toxic, low volatility. High dielectric. resistant to oxidation. Thermally stable ozone resistant. Minimal effects on rubbers, plastics and metals. Unaltered by UV light.



Size	Order Code
100ml	-6250D
400ml	-6260E
500g	-6270F

Food Safe White Grease

Intended use for lubrication of bearings, slides and all delicate mechanisms used in the food manufacturing/ processing industry. Maximum operating temperature 150°C with excellent load carrying capacity and water resistance. **FDA Compliant**. **INS H1 registered**. Non-toxic.



Size	Order Code
400ml	-5900A
5.0kg	-5905C

ACTION CAN Food Grade Silicone Release Agent

SP90-FG H1
Superior silicone dry lubricant formulated to provide extra performance and maximum silicone release. Temperature range -65°C to +315°C.
Holds **H1** approval from **NSF # 143541** and **InS # 1795388**.
Odourless, tasteless, chemically inert.

500 ml

Size	Order Code
500ml	-9010K

SOLENT HYGIENE FOR FOOD Food Safe Wipes

Hand Wipes
These non-toxic, single-use wipes are excellent for killing lethal bacteria and preventing cross-contamination.
Size: 20 x 30cm.



Pack Quantity	Order Code
200	-4400K

Probe Wipes

These single use wipes are for the disinfectant cleaning of food probes to prevent cross-contamination. Tub of 175 (13 x 13cm) wipes.



Pack Qty	Order Code
175	-5500K



LUBRICANTS & CHEMICAL PRODUCTS

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR