

HD-Video Twisted Pair Solution




- TPP01-HD** – 1ch Passive Transceiver
- TPA01-HD** – 1ch Active Receiver
- TPP04-HD** – 4ch Passive Transceiver

Features

- Suitable for both AHD & TVI System
- Max. Cable Distance :
 - Passive-Passive TVI : 100m
 - Passive-Active TVI : 300m
 - Passive-Passive AHD : 150m
 - Passive-Active AHD : 450m
 - Passive-Active Analog : 650m
- 2KV lightning protection
- Operating Temperature : 0~55°C



Connection Diagram

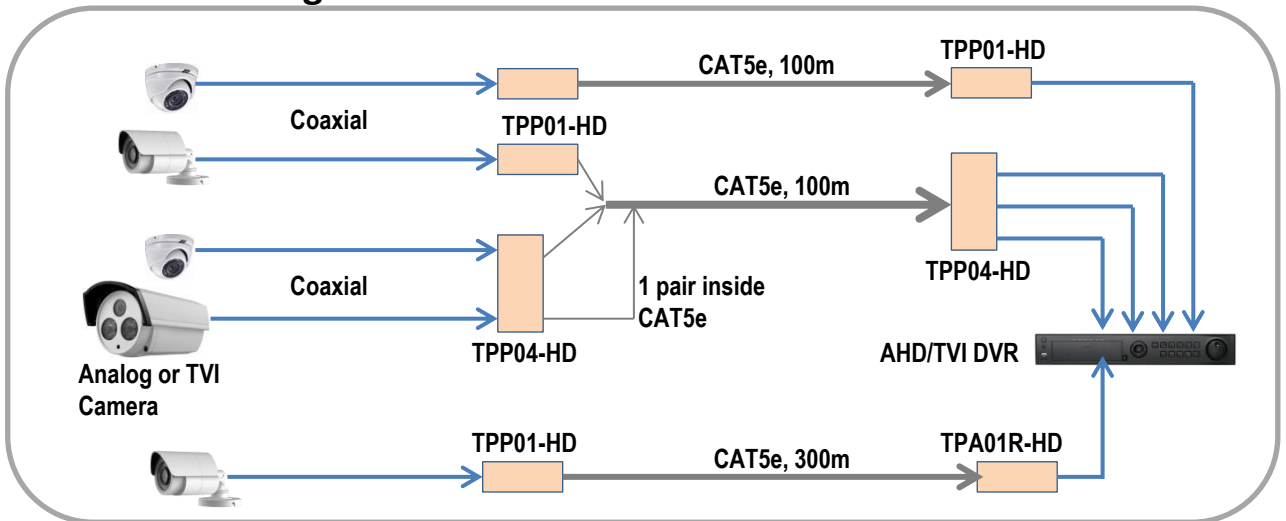

NO.	Component	Description
①	Power supply block	Power supply input
②	Green terminal block	Grounding
③	Green terminal block	For UTP cable
④	switches	For color adjustment
⑤	switches	For brightness adjustment
⑥	BNC-M	Video Output
⑦	MIT Pole	For MIT Installation

- 82(W) x85(D) x25(H) mm
- Weight : 140g

- 115(W) x82(D) x22(H) mm
- Weight : 180g

* Specification maybe changed without prior notice