


IES-104P – 4-Port PoE Switch with 2 Uplink




Features

- 4x RJ45 PoE Port, 10/100-Base-T
- 2x RJ45 Uplink Port, 10/100-Base-T
- PoE Standard : IEEE802.3 af/at
- Total Power : 60W Total
- Max. Power single port : 30W
- **VLAN** : POE port only link to Uplink port
- **QoS** : LAN prioritise Internet
- **EXTEND** : PoE port 250m@10Mbps
- **PoE** : Auto restart port if PoE on data off
- 48VDC (Adapter Included)
- Recommend used in indoor condition


Connection Diagram

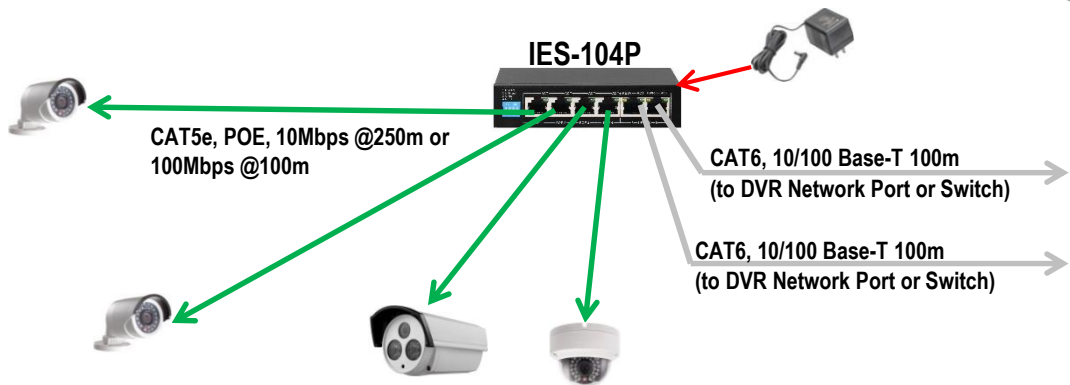


Front board

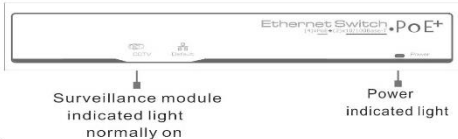

Back board

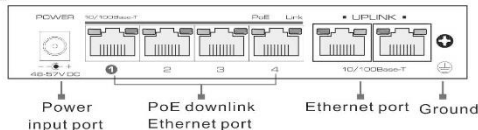

Side board



Specification

- 48~52VDC Input, 48V/2A Adapter inc.
- Switching Capacity : 1.2Gbps
- Data Buffer : 768K
- Network Delay : <20uS
- Network Protocol : 802.3i/u/x/af/at
- Operating Environment : 0~40°C / 0~95% Humidity
- Surge protection : 3kV
- Galvanized Sheet with Black Epoxy Powder Coating
- Size : 125 x 27 x 75(D) mm, 0.5kg