



Join our photo contest to win RM1,000*

*Terms and conditions apply

Details at: www.suzuka.com.my/promotion/



Luxury in the details



architects choice

NEW IMPROVED FORMULA

TROWEL STONE

Trowel Stone

CAUTION

- The material may loosen or detach from the surface if the application is too thick.
- A stainless steel trowel is highly recommended to prevent rust stains adhering to the materials.
- Different surfaces require different types of undercoat, i.e. wooden surfaces require a wood undercoat.
- Trowel Stone products cannot be applied on glass or metal surfaces, underground or water accumulated areas.
- Always protect/cover applied product during the curing period from wind, water, smoke and rust till fully dried, i.e. canvas coverings.
- As SUZUKA® uses all natural pebbles, we recommend making a one-time order to ensure color consistency.
- Should you wish to apply different colors on the same surface, the use of groove lines are recommended to avoid joint problems.
- Ensure application is complete edge to edge to avoid joint problems.
- Do not apply under direct sunlight or rain.

For Trowel Floor Only

- Apply only when the floor temperature is above 13°C and under 32°C. Do NOT apply within -15°C of dew point.
- Interior concrete floor that do not have an effective moisture vapor retarder may possibly lead to moisture vapor transmission and related high levels of alkalinity which causes blistering and failure of the coating system.
- New concrete requires 28 days cure and preferably a broom swept finish prior to coating.
- Please ensure the floor is fully dried (with no traces of moisture) before applying SUZUKA® TF.
- Not recommended for driveways and heavy duty use.

For Trowel Wall Only

- Apply only when temperature is above 5°C.



suzuka.com.my

[suzuka malaysia](#) | Hotline: 012-3595 677

1808

TAIWAN • MALAYSIA • THAILAND



EDITION 5

TROWEL WALL

NEW & IMPROVED FORMULA

SUZUKA® Trowel Wall is a decorative wall coating that incorporates a high-tech acrylic resin with natural marble stones. It creates a natural pebble wash effect with a flat appearance and a wide variety of colors that aesthetically enhances your property.

SUZUKA® Trowel Wall has brilliant protection against ultra-violet rays, pollution, fungus, mold and algae. It can be applied on wide range of interior and exterior surfaces and finishes such as plaster, concrete, bricks, wood, and gypsum.



TROWEL FLOOR

NEW & IMPROVED FORMULA

SUZUKA® Trowel Floor is a UV resistant decorative floor coating that incorporates a high-tech resin with natural marble stones. It delivers a unique surface that utilizes magnificent colors and textures while encompassing a quality that allows it to be applied, maintained and cleaned easily.

SUZUKA® Trowel Floor has excellent resistance against weather and UV while providing an anti-slippery surface. Its exceptional formula comprises superb protection against pollution, fungus, mold and algae.

Effect



Trowel Floor TF-C-301




Trowel Wall TW-C-301

Due to the different nature of the adhesive for Trowel Wall and Trowel Floor, after application, Trowel Floor products will appear to be darker and glossier.



Textured Coating

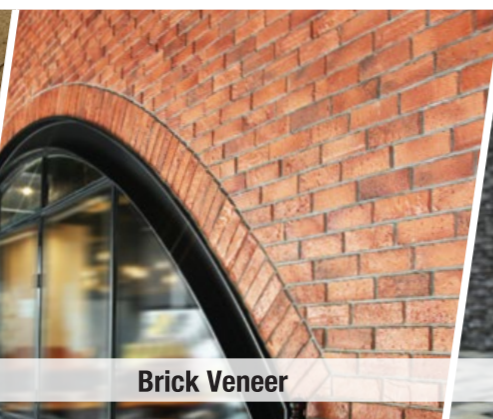

Brick Veneer



Artificial Stone Veneer




Exposed Concrete Effect



Interior Textured Paint



Trowel Pebble Stone Coating

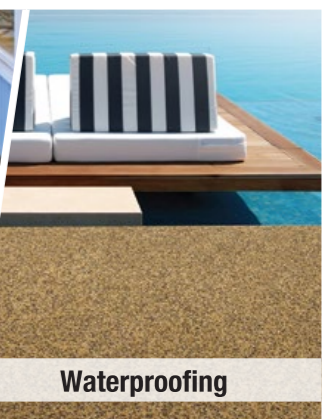

Waterproofing

Type S

COVERAGE:

- TW 50 - 70 sqf, 25 kg / drum
- Thickness: 1.8 mm to 2.5 mm
- Size: 1.0 mm - 1.5 mm



TW

S-001



TW

S-002



TW

S-003



TW

S-004




TW

S-005



TW

S-006

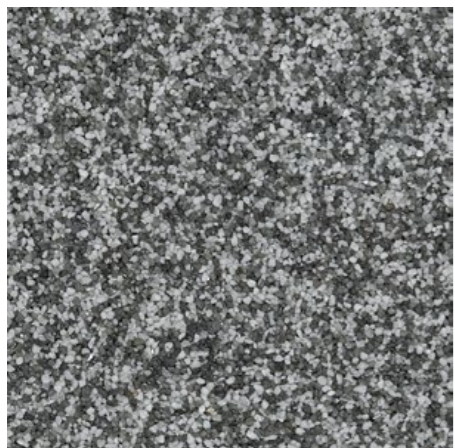

TW

S-007



TW

S-009



TW

S-010



TW

S-011




TW

S-012



TW

S-013

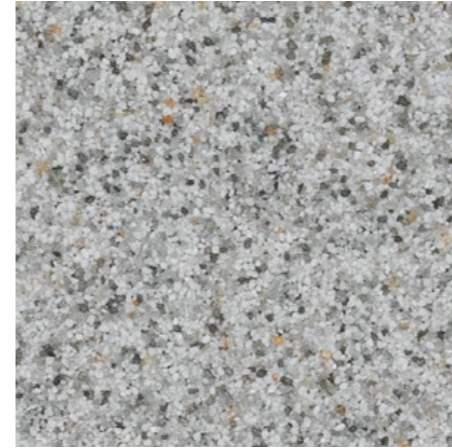


TW

S-014



TW

S-015

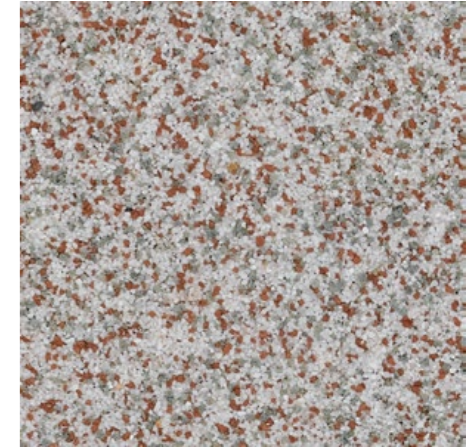

TW

S-016



TW

S-017




TW

S-018



TW

S-019

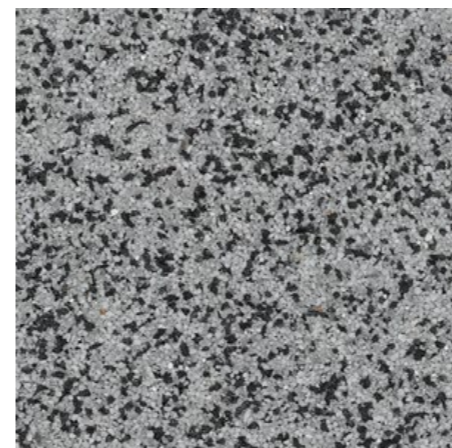

TW

S-023






TW

S-024



TW

S-025

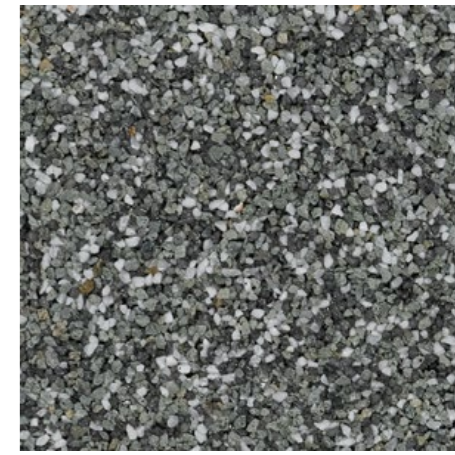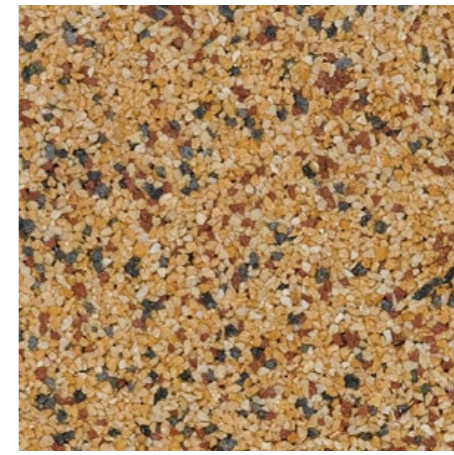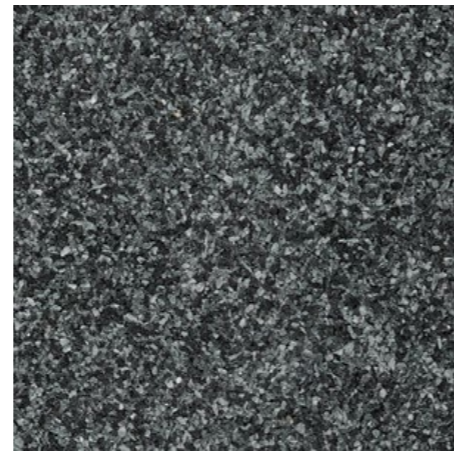

TW

S-026

TW

S-027

TW

S-028

TF / TW

A-108

TF / TW

A-109




TF / TW

A-110

Type A

COVERAGE:

- TF 30 - 35 sqf, 14 kg / drum
Thickness: 2.5 mm to 3.5 mm
- TW 40 - 50 sqf, 25 kg / drum
Thickness: 2.0 mm to 3.0 mm
- Size: 1.5 mm - 2.0 mm

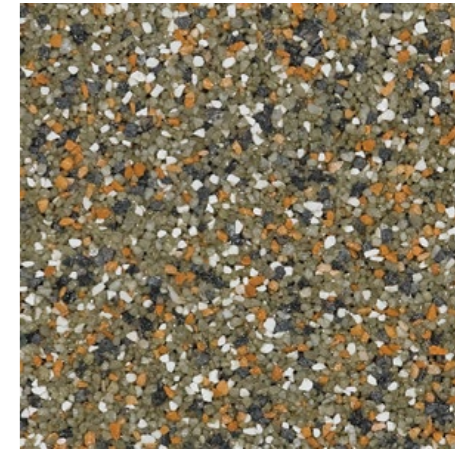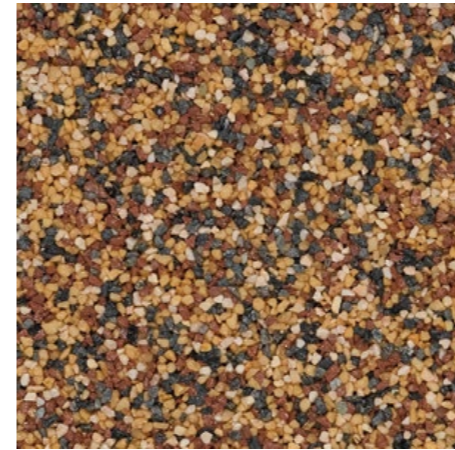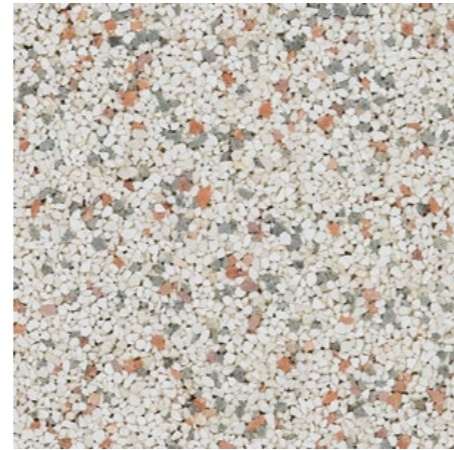

TF / TW

A-101

TF / TW


A-111

TF / TW

A-114

TF / TW

A-115

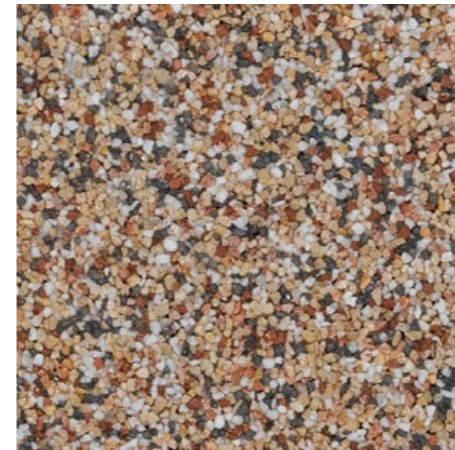

TF / TW

A-102

TF / TW

A-103

TF / TW

A-104

TF / TW



A-116

TF / TW

A-117

TF / TW

A-118

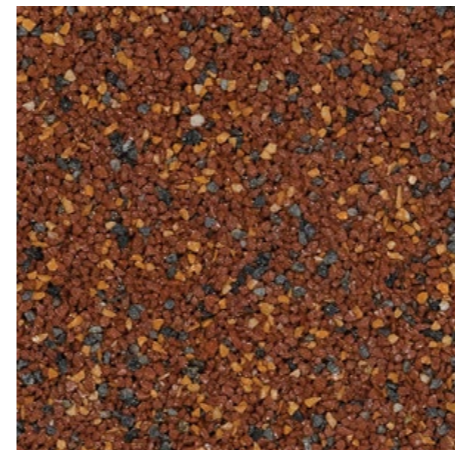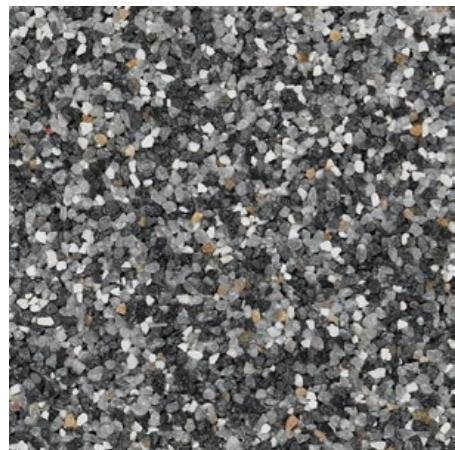

TF / TW

A-105

TF / TW

A-106

TF / TW

A-107

TF / TW


A-119

TF / TW

A-120


TF / TW

A-121

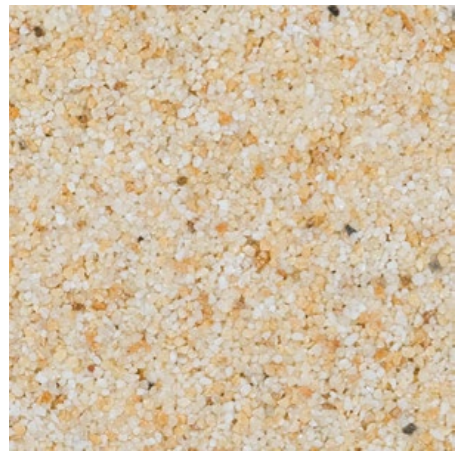

TF / TW

A-122

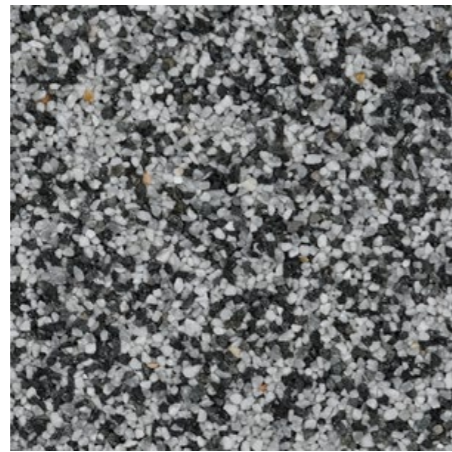

TF / TW

A-123




TF / TW

A-124



TF / TW

B-204

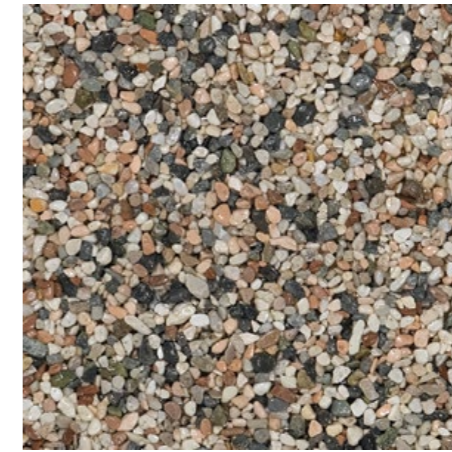

TF / TW

B-205




TF / TW

B-206




TF / TW

A-125

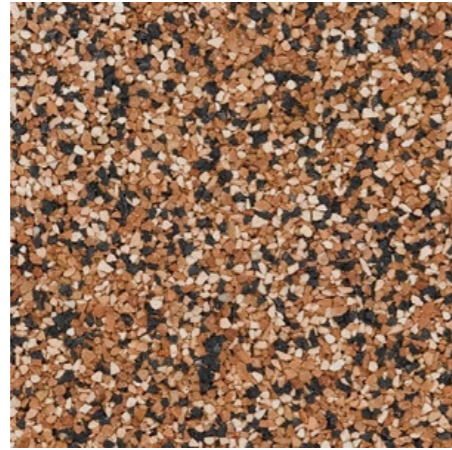

TF / TW

A-126

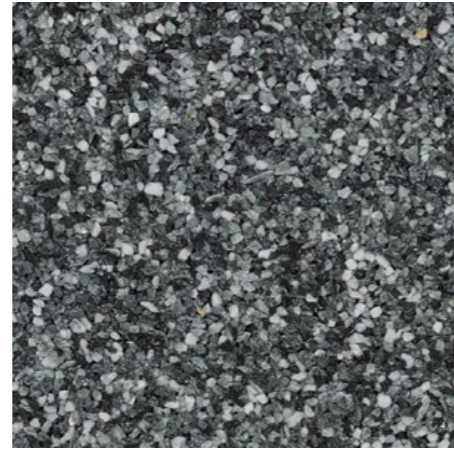

TF / TW

A-127

Type C

COVERAGE:

- TF 30 - 38 sqf, 21 kg / drum
Thickness: 4.0 mm to 5.0 mm
- TW 30 - 40 sqf, 25 kg / drum
Thickness: 3.0 mm to 5.0 mm
- Size: 3.5 mm - 4.5 mm

Type B

COVERAGE:

- TF 30 - 35 sqf, 17 kg / drum
- TW 35 - 45 sqf, 25 kg / drum
- Thickness: 3 mm to 4 mm
- Size: 2.0 mm - 3.5 mm



TF / TW

C-301



TF / TW

C-302



TF / TW

C-303




TF / TW

B-201



TF / TW

B-202

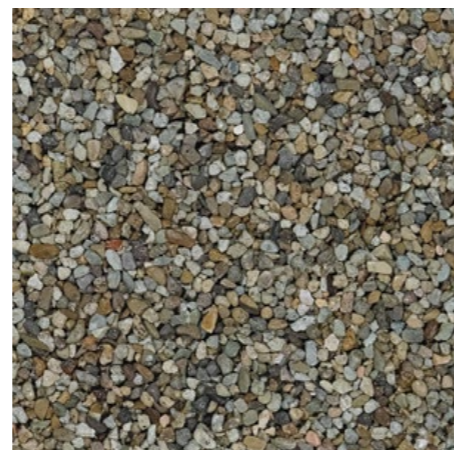


TF / TW

B-203



TF / TW

C-304

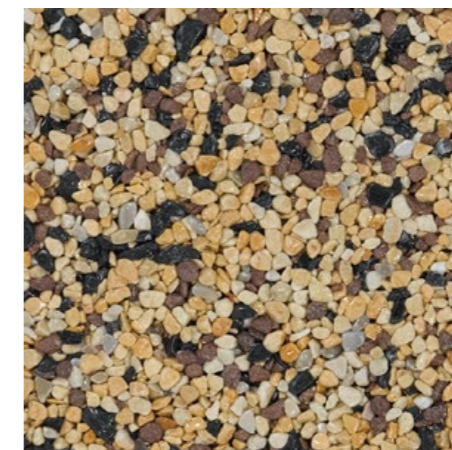

TF / TW

C-305



TF / TW

C-306



TF / TW

C-307



TF / TW

C-309



TF / TW

C-311




TF / TW

C-316



TF / TW

C-317

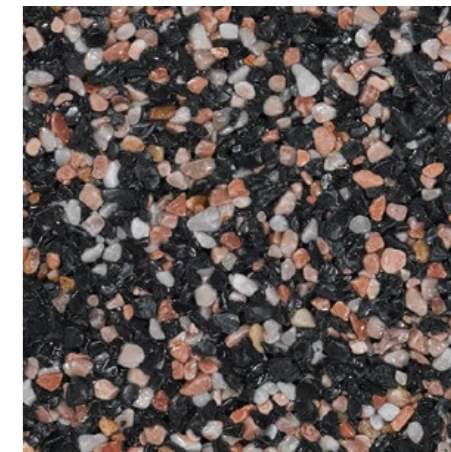

TF / TW

C-318



TF / TW

C-312



TF / TW

C-313



TF / TW

C-315



TF / TW

C-320



TF / TW

C-321




TF / TW

C-322



TF / TW

C-323

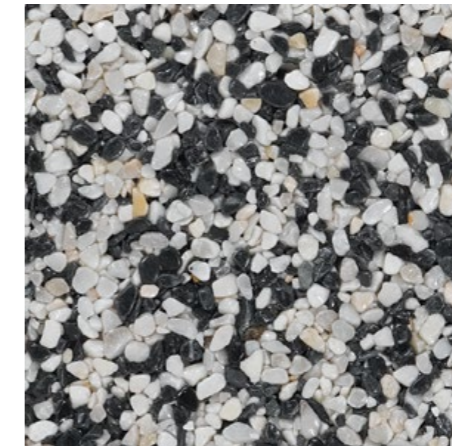

TF / TW

C-324



TF / TW

C-325

Type D

COVERAGE:

- TF 25 - 30 sqf, 21 kg / drum
- Thickness: 5 mm to 6 mm
- Size: 4.5 mm - 5.5 mm



TF

D-401



TF D-402



TF D-403



TF D-404




TF D-411



TF D-413



TF D-414

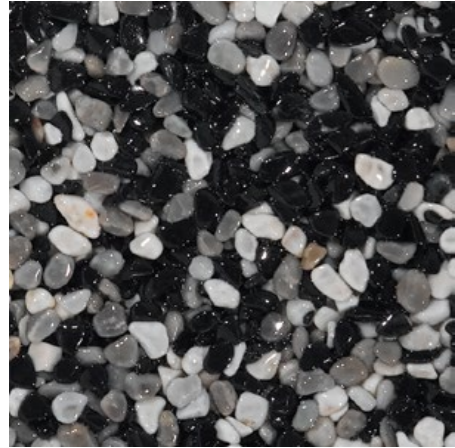

TF D-407



TF D-408




TF D-409




TF D-415



TF D-416

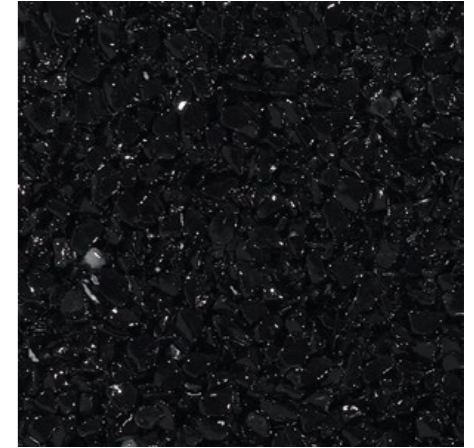

TF D-419

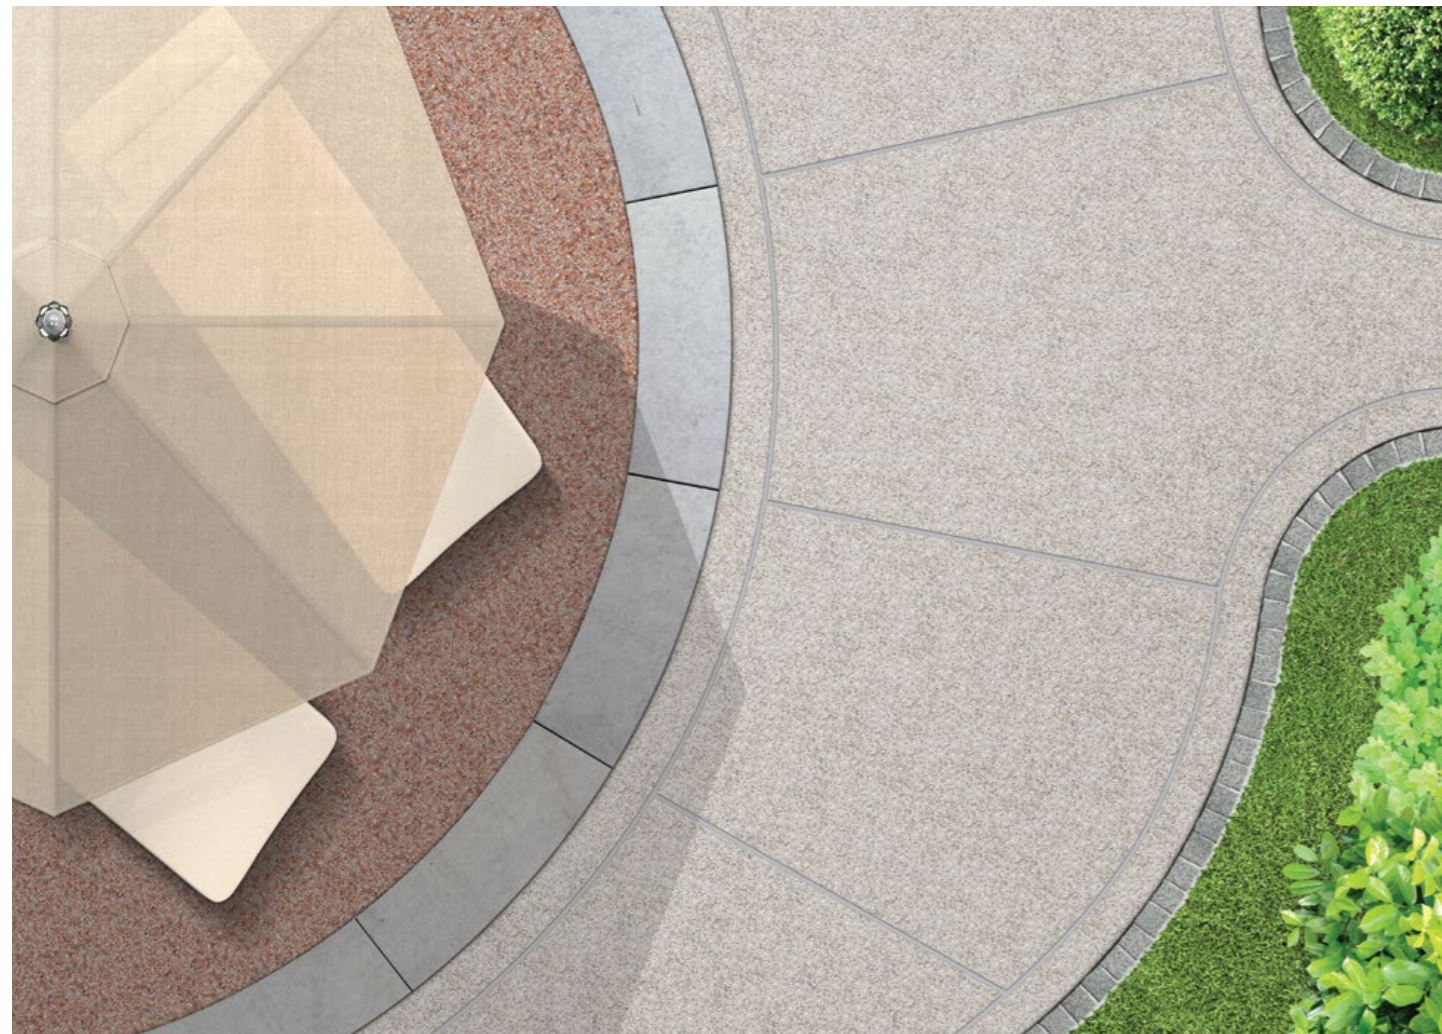

TF D-420



TF D-421



TF D-422

KASTONE® Topcoat Stone Care

Topcoat for stone & other masonry surfaces for extra protection and durability.



Coverage & Packing:

High Gloss			Natural		
1L	4L	18L	1L	5L	18L
75 ~ 108sqf	301 ~ 431sqf	1,356 ~ 1,938sqf	75 ~ 108sqf	377 ~ 538sqf	1,356 ~ 1,938sqf

Suitable for:

- SUZUKA® KASTONE® & Trowel Stone
- Concrete Imprint
- Pebble Wash
- Bricks
- Natural Stone
- Stone / Brick Veneer

* Not recommended for pre-sealed surfaces or non-porous surfaces, such as ceramic tile, marble, granite, porcelain and terrazzo.

Features:

Easy Application	UV Resistance	Long Lasting & High Endurance
High Adhesion	Water, Algae & Fungus Resistance	Stain Resistance & Easy Cleaning

High Gloss Finish:
An acrylic solvent-based topcoat allowing colour-enhancement and a glossy finish.

Natural Finish:
An environmentally-friendly water-based topcoat that maintains the original color.

