

**Table 3 Benchtop pH/cond. Meter Model Comparison**

Model	PC910	PC950	PC9500
Parameter	pH/mV/Cond./TDS/Sal/Res/ °C(°F)		
pH	Range	0 to 14.00 pH	-2.000 to 20.000 pH
	Resolution	0.1/0.01 pH	0.1/0.01/0.001 pH
	Accuracy	±0.01 pH±1 digit	±0.002pH±1 digit
	Temp. compensation	0 to 100 °C (32 to212 °F) , automatic or manual	
	Calibration	1~3 points automatic	1 ~ 5 points automatic
	Buffer	USA/NIST/CH	USA/NIST/DIN/CH/User
Other specifications are same with table1 (Calibration remind, Calibration data checking, Measuring alarm, Stability setting)			
mV	Range	±2000mV	±2000mV
	Resolution	1mV	0.1/1mV
	Accuracy	±0.1% F.S ±1 digit	±0.03% F.S ±1 digit
	Range	0~200.0mS/cm	0~2000mS/cm
	Resolution	0.1/1μS, 0.01/0.1mS	0.01/0.1/1μS, 0.01/0.1/1mS
Conductivity	Accuracy	±1%F.S±1 digit	±0.5%F.S±1 digit
	Electrode constant	0.1/1.0/10.0 cm-1	
	Temp. compensation	0 to 50 °C (32 to212 °F) , automatic or manual	
	Criterion temperature	15~30 °C	
	Temp. compensation coefficient	0~10.00%/ °C	
	Calibration	1~4 points automatic	
	Calibration standard	USA/CH	USA/CH/User
Other specifications are the same with table2 (Calibration remind, Calibration data checking, Measuring alarm)			
TDS	Range	0.1mg/l~100 g/l	0.1mg/l~500 g/l
Salinity	TDS coefficient	0.40~1.00	
	Range	0~100 ppt	0~100 ppt
Resistivity	Range	No	0~20 MΩ·cm
	Range	0~100.0°C, 32.0~212 °F	-10~110.0°C, 14.0~230°F
Temperature	Resolution	0.1°C; 0.1/1°F	
	Accuracy	±0.5°C±1 digit	
	Display	TFT color display	
Function	Stable measuring indication	With ☺ icon	
	Automatic hold	Yes	Yes
	Date and time	No	Yes
	Data storage	200 sets	200 sets
	Timing storage	No	Yes
	Self diagnosis information	Yes	Yes
	USB output	No	Yes
	GLP print	No	Yes (printer optional )
	External keypad	No	Yes
	Electrode holder	602 flexible holder	606 combination test bench (with stirrer)
Other	IP Rating	IP54 water and dust proof	
	Electrode	pH: 201T-F, Cond.: 2301T-F	pH:LabSen 211, Cond.:2401T-F Temp: MP500
	Power	DC9V	
	Dimension	200×220×100mm	360×165×400mm
Weight	0.95kg	1.25kg	



# Benchtop pH/Conductivity Meters

- pH
- mV
- Conductivity
- TDS
- Salinity
- Resistivity



- 700 Series
- 910 Series
- 950 Series
- 9500 Series

Apera Instruments, LLC (U.S.A)  
 Add: 6656 Busch Blvd,  
 Columbus Ohio 43229  
 Tel: +1 614-285-380  
 Email: info@aperainst.com  
 Website: www.aperainst.com

Apera Instruments, GmbH (Europe)  
 Add: Wilhelm-Muthmann-Straße.15  
 42329 Wuppertal Germany  
 Tel. +49 (0)202 51988998  
 Email: info@aperainst.de  
 Website: www.aperainst.de


Shanghai Apera Instruments  
 Co., Ltd. (China)  
 Add: 481 Guiping Rd Building #16,4F,  
 Shanghai China  
 Tel: +86-21-63362480  
 E-mail: wxmab@shsan-xin.com

## 700 Series Benchtop Meter

- PH700 pH Meter pH/mV/Temp.
- EC700 Conductivity Meter Cond./TDS/Temp.

### Main features

- The most economical choice for a reliable benchtop meter
- Equipped with ATC pH and conductivity electrodes, convenient to use
- Automatic calibration with calibration guide and self-diagnosis

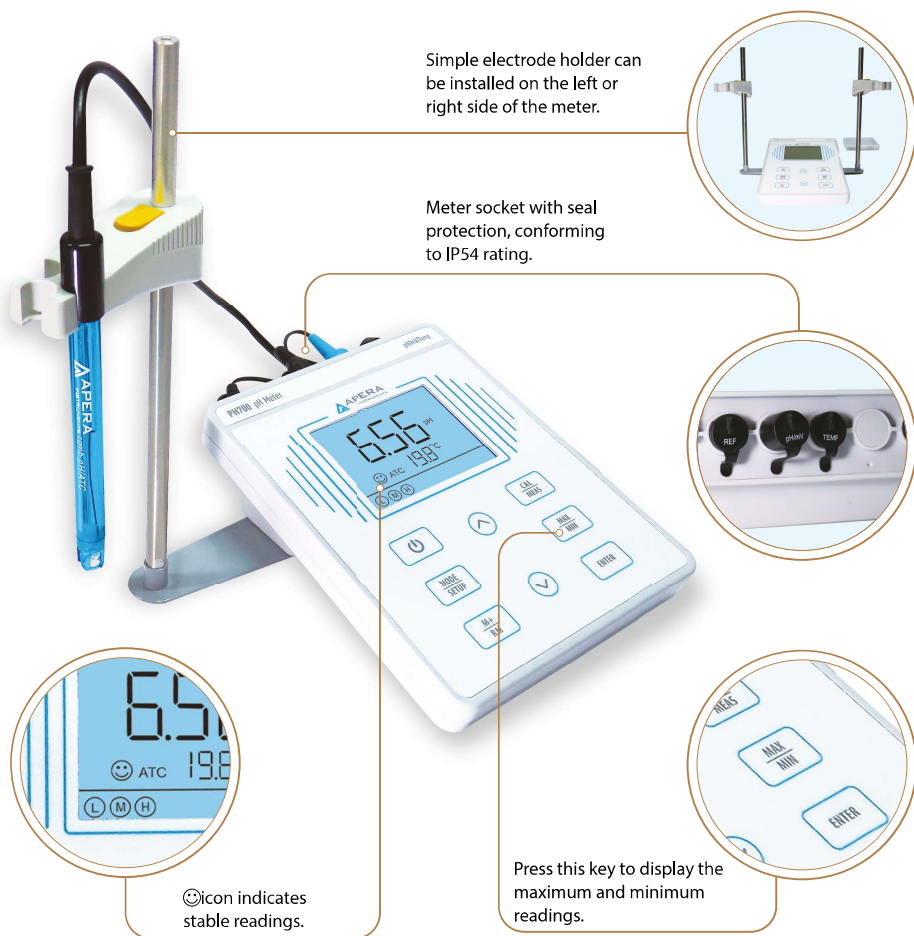

## 910 Series Benchtop Meter


- PH910 pH Meter pH/mV/Temp.
- EC910 Conductivity Meter Cond./TDS/Temp.
- PC910 pH/Conductivity Meter pH/mV/Cond./TDS/Temp.

### Main features

- TFT color screen with graphic and text guides
- Equipped with a flexible electrode holder
- Multi-language operating system (English, Chinese, German, Italian and Spanish)


### Measurement mode

- Simultaneously display two measuring parameters
- When measuring value is stable, displays
- With automatic hold function

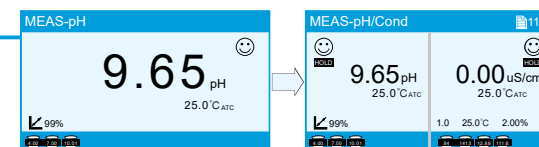


### Calibration mode

Graphic calibration guide ensures correct calibration procedures to be completed.

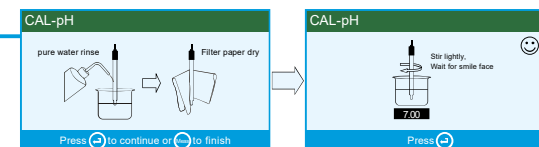

### Parameter setting mode

Clear menu setting, with operating guide.





## 950 Series Benchtop Meter

- PH950 pH Meter pH/mV/Temp.
- EC950 Conductivity Meter Cond./TDS/Temp.
- PC950 pH/Conductivity Meter pH/mV Cond./TDS/Temp.

### Main features

- TFT color screen with graphic and text guide
- Multifunctional test bench with intelligent stirrer and flexible electrode holder
- Multi-language operating system (English, Chinese, German, Italian and Spanish)

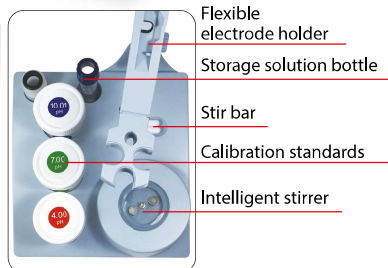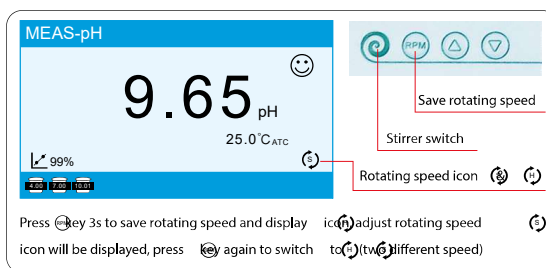

(a) Connect to use




(b) Separate to use

## 9500 Series Benchtop Meter

- PH9500 pH Meter pH/mV/Temp.
- EC9500 Conductivity Meter Cond./TDS/Salt/Res/Temp.
- PC9500 pH/Conductivity Meter pH/mV/Cond./TDS/Salt/Res/Temp.



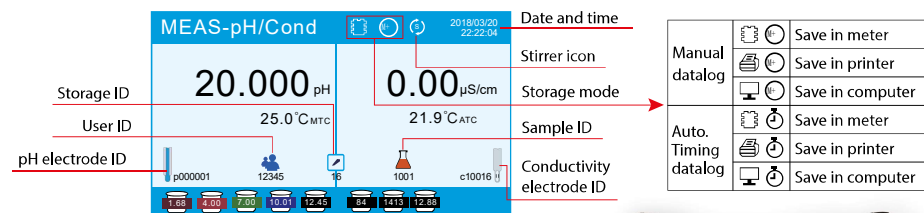

### Main features

- TFT color screen with graphic and text guides
- Conform to GLP data management standard, each group data includes time & date, ID of sample, electrode, and user
- Operation with password protection; support GLP printer
- Multi-language operating system (English, Chinese, German, Italian and Spanish)









### Table 1 Benchtop pH Meter Model Comparison

						
Model		PH700	PH910	PH950	PH9500	
Parameter		pH/mV/ °C(°F)				
pH	Range	0 to 14.00 pH			-2.000 to 20.000 pH	
	Resolution	0.1/0.01 pH			0.1/0.01/0.001 pH	
	Accuracy	±0.01 pH±1 digit			±0.002pH±1 digit	
	Temp. compensation	0 to 100 °C (32 to 212 °F) , automatic or manual				
	Calibration	1~3 points automatic			1~5 points automatic	
	Buffer	USA/NIST	USA/NIST/CH		USA/NIST/DIN/CH/User	
	Calibration reminding	No	No	No	Yes	
	Calibration data checking	No	Yes	Yes	Yes	
	Measuring alarm	No	No	No	Yes	
	Stability setting	No	No	No	Low-Middle-High	
mV	Range	±2000mV		±2000mV		
	Resolution	1mV	1mV		0.1/1mV	
	Accuracy	±0.1% FS ±1 digit			±0.03% FS ±1 digit	
Temp.	Range	0~ 100.0°C; 32.0 ~ 212 °F			-10~-110.0°C; 14.0~230°F	
	Resolution	0.1°C; 0.1/1°F				
	Accuracy	±0.5°C±1 digit; ±0.9°F±1 digit				
Function	Display	LCD	TFT color display			
	Stable measuring indication	with ☺ icon				
	Automatic hold	No	Yes	Yes	Yes	
	Date and time	No	No	No	Yes	
	Data storage	50 sets	100 sets	100 sets	1000 sets	
	Timing storage	No	No	No	Yes	
	Self diagnosis information	Yes	Yes	Yes	Yes	
	USB output	No	No	No	Yes	
	GLP print	No	No	No	Yes (printer optional )	
	External keypad	No	No	No	Yes	
	pH electrode connector	BNC	BNC	BNC	BNC	
	Electrode holder	Simple holder	602 flexible holder	606 combination test bench (with stirrer )		
	IP Rating	IP54 water and dust proof				
	Electrode	201T-F		pH: LabSen211, Temperature: MP500		
	Power	DC9V				
	Other	Dimension	240×235×103mm	200×220×100mm	360×165×400mm	
		Weight	1kg	0.95kg	1.25kg	

### Table 2 Benchtop Conductivity Meter Model Comparison

					
Model		EC700	EC910	EC950	EC9500
Parameter		Cond./TDS/ °C(°F)	Cond./TDS/Sal/ °C(°F)		Cond./TDS/Sal/Res/°C(°F)
Cond.	Range	0~200.0mS/cm	0~200.0mS/cm		0~2000mS/cm
	Resolution	0.1/1µS, 0.01/0.1mS			0.01/0.1/µS,0.01/0.1/1mS
	Accuracy	±1%FS±1 digit			
	Electrode constant	0.1/1.0/10.0 cm-1			
	Temp. compensation	0 to 50 °C (32 to 212 °F) , automatic or manual			
	Criterion temperature	15~30 °C			
	Temp. compensation coefficient	0~10.00%/ °C			
	Calibration	1~4 points automatic			
	Calibration standard	USA	USA/CH	USA/CH	USA/CH/User
	Calibration reminding	No	No	No	Yes
TDS	Calibration data checking	No	Yes	Yes	Yes
	Measuring alarm	No	No	No	Yes
	Range	0.1mg/l~100 g/l			0.1mg/l~500 g/l
Salinity	TDS coefficient	0.40~1.00			
	Range	No	0~100 ppt		0~100 ppt
Resistivity	Range	No	No	No	0~20MΩ•cm
	Range	0~100.0°C; 32.0~212°F			-10~-110.0°C; 14.0~230°F
Temp.	Resolution	0.1°C; 0.1/1°F			
	Accuracy	±0.5°C±1 digit, ±0.9°F±1 digit			
	Display	LCD	TFT color display		
Function	Stable measuring indication	With ☺ icon			
	Automatic hold	No	Yes	Yes	Yes
	Date and time	No	No	No	Yes
	Data storage	50 sets	100 sets	100 sets	1000 sets
	Timing storage	No	No	No	Yes
	Self-diagnosis information	Yes	Yes	Yes	Yes
	USB output	No	No	No	Yes
	GLP print	No	No	No	Yes (printer optional )
	External keypad	No	No	No	Yes
	Cond. electrode connector	BNC	BNC	BNC	BNC
Other	Electrode holder	Simple holder	602 flexible holder	606 combination test bench (with stirrer )	
	IP Rating	IP54 water and dust proof			
	Electrode	2301T-F		2401T-F	
Other	Power	DC9V			
	Dimension	240×235×103mm	200×220×100mm	360×165×400mm	
	Weight	1kg	0.95kg	1.25kg	