


FixQuick Ultra-fast Leak Stop

- Ultra-fast: takes just 20 seconds to repair refrigerant gas leaks up to 1 mm.
- Pressure resistance:
 - 20 seconds to fix up to 20 bar (290 psi)
 - 20 minutes to fix up to 50 bar (725 psi)
- Resists up to 250°C (482°F).
- Easy to use: STEP 1 - liquid with brush; STEP 2 - powder.
- Can be used on metal and plastic components.
- Can be applied on flat, curved, horizontal or vertical surfaces.
- Ideal for urgent repairs.
- Ideal for repairs where welding cannot be carried out.
- Permanent result.
- Visible with any UV lamp: it allows you to pinpoint and check the condition of previous repairs.




Art.-Nr.	€		
TR1180.01	-	30	-

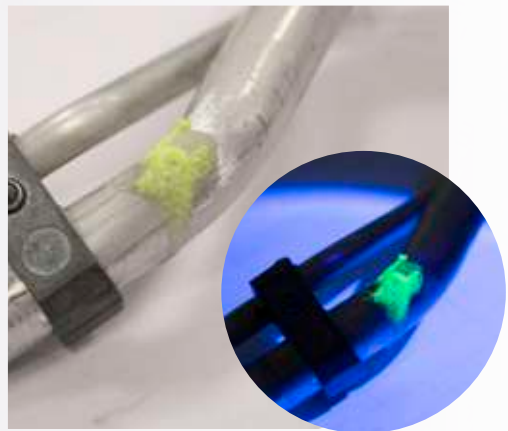

External

Two-component Putty Leak Stop

- Repairs refrigerant gas leaks up to 5 mm.
- Ideal for urgent repairs.
- Perfectly adheres to metal (copper, aluminium, and steel) and rubber components.
- Can be used on thermoplastic pipes.
- Resists refrigeration lubricant (mineral, POE, PAG, PAO and Alkylbenzene).
- Resists refrigerant gases (CFC, HFC, HCFC, CO₂, including R32 and R1234yf).
- Resists additives and flushing fluids, including chlorinated ones.
- Temperature range use: -100°C to +270°C (-148 °F to 518 °F).
- Can be used on either the high or low side of HVAC/R systems.
- Different pressure resistance depending on the size of the leak:
 - 5 mm = 40 bar (580 psi) - 2 mm = 50 bar (725 psi) - 1 mm = 57 bar (826 psi).
- Easy to use: it can be easily mixed by using two fingers and, once applied, it permanently repairs the leak in 4-5 hours.
- There is no risk of product dispersion in AC/R systems.
- Once dried, it can be easily sanded or removed.

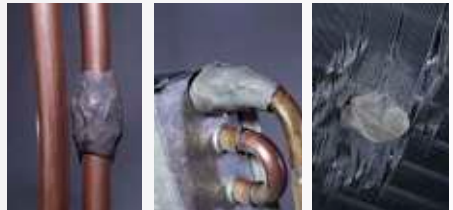

EXTERNAL P

is the two-component putty leak stop specially formulated for plastic components of air conditioning and refrigeration systems and plumbing applications.

Art.-Nr.	Description	€		
TR1166.01	External	-	60	10800
TR1172.01	External P	-	60	10800

