


Automatic Filtration Parts Washer

- Snap-on® dual filter parts washers provide a clean supply of solvent for washing parts
- Filtration system virtually eliminates solvent changes
- Composite dual stage filter provides continuous filtration of solvent
- First stage filtration removes heavy solids
- Second stage filtration provides further purification by removing oil and grease
- Constructed of 16-gauge steel and features an added lip for strength
- Complete with work lamp and flexible spout



PBD3222A

First stage filtration removes heavy solids

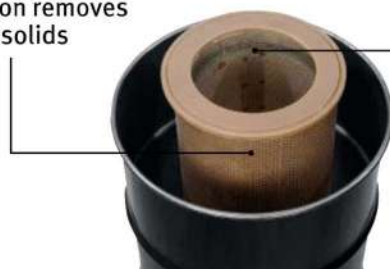

PBD3209

Dual stage filter

Second stage filtration provides further purification by removing oil and grease



PBC3222A



PBC4828



PBC16



PBD2622A

Specifications	PBD3222A	PBC3222A	PBC4828	PBC16	PBD2622A
Filtration	Dual	Dual	Dual	—	Dual
Base	Drum	Square	Square	—	Drum
Inside Dimensions, inches	32 W x 22 D x 10 H	32 W x 22 D x 10 H	48 W x 28 D x 14 H	15 W x 16 D x 6 H	26 W x 17 D x 7 H
Fluid Requirements (gal)	20	20	20	5	10
Input, V AC (Hz)	120 V AC (60 Hz)	120 (60)	120 (60)	120 (60)	120 (60)
Pump Volume, gallons/hour	325	325	325	210	210
Output Pressure, PSI	50	50	50	50	50
Overall Dimensions, inches	36 W x 26 D x 39 H	36 W x 26 D x 39 H	52 W x 32 D x 45 H	1 W x 23 D x 10 H	30 W x 21 D x 34 H
Open Height, inches	63	63	75	23	53
Replacement Filter	PBD3209	PBD3209	PBD3209	—	PBD3202
European Models (230 V AC, 50 Hz)	PBDH3222AEUR	PBCH3222AEUR	PBCH4828EUR	—	PBDH2622AEUR
PBD1751 Parts Tray	Included	Included	Included	PBCH16-EUR	—
PBA720A Drain Table	Optional	Optional	Optional	—	—

TECHNICAL SUPPORT: 800-253-3661

- Read and follow safety messages in the Instructions.
- Follow maintenance requirements.
- Use pressure regulator, lubricator and moisture filter on air line.
- Do not direct air or fluid stream at body.
- Use only in well-ventilated area.
- Do not expose solvent to flames, sparks, or other sources of ignition.
- Do not use washer without fusible link or safety valve intact.
- † These products can expose you to chemicals which are known to the state of California to cause cancer and reproductive harm. See pages P1-P2 for details.
- Read Safety Precautions on pages W1-W4





PBC33B



PBC3022



PBC42B

Electric/Medium-Duty

Specifications	PBC33B	PBC3022	PBC42B
Depth, inches (mm)	28 (711)	22 (559)	24 (610)
Reservoir Capacity, gal	20	6	12
Electrical Requirements	120 V AC, 60 Hz	115 V AC, 20 A	230 V AC, 60 Hz
Pump Motor, HP	—	—	3/4
Output Pressure, PSI	50	50	500
Volume, gallons per hour	325	325	180
Heater, watts	1,500	1,500	1,500
Open Height, inches	65	32	69
Inside Dimensions, inches	21 W x 31-1/2 D x 10 H	17 W x 12 D x 14 H	40 W x 24 D x 16-24 H
Overall Dimensions, inches	37 W x 28 D x 42 H	30 W x 22 D x 32 H	44 W x 24 D x 65 H
European Models (230 V AC, 50 Hz)	PBCH33B-EUR	PBC3022EUR	PBCH42BEUR

European Models: PBCH33B-EUR (230 V AC, 50 Hz), PBCH42B-EUR (230 V AC, 50 Hz), PBCH57AEUR (230 V AC, 50 Hz)

CE

PBC33B Heated Aqueous Parts Washer

- Clean parts with a flexible pressurized cleaning spout
- Solution is heated for additional cleaning effectiveness
- Easily accessible polysateen drain filter to remove solids
- Heavy-wall polyethylene tub and solid base is durable for heavier parts
- Integral oil skimmer removes oil and grease from the cleaning solution to maximize cleaning effectiveness
- Clean parts with less effort—the solution works effectively by relieving surface tension of the grime
- Cleaning solution lasts longer, which minimizes solution changes by not absorbing oil and dirt
- Cleaning solution carries a licensed Green Seal® Certification Mark and is certified by the South Coast Air Quality Management Distribution
- Carries the highest environmental certifications, which lessens the environmental impact taking care of our land, water and air resources
- Low solution warning indicator
- Includes (5) gallons of PBA733 Cleaning Solution and (1) gallon of PBA734 Cleaning Concentrate Booster

PBC3022 Heated Aqueous Parts Washer

- Portable, compact design can be easily moved to the job site
- Sealed lid prevents splashing when used on mobile service vehicles
- Body and lid are made of high-density polyethylene for durability
- Stainless steel mesh work surface for durability and strength
- Heating element increases cleaning effectiveness and is thermostatically controlled
- Features a 5-micron filter to separate out dirt and debris

PBC42B High-Pressure Parts Washer

- Fully enclosed aqueous parts washer
- Blast parts clean with a 500 PSI high-pressure wand
- Soap solution is heated for additional effectiveness
- Automatic soak cycle loosens grime



PBC57A



PBC58



PBC55-1



PBC55-3

Electric/Heavy-Duty

- High-pressure aqueous parts washer effectively cleans engine blocks, cylinder heads, transmission cases and small parts
- Cycle time can be adjusted from 0–60 minutes
- Five RPM turntable is driven by a #40 chain for rotation without slippage; extends 18" for easy part loading
- Sprocket drive and turntable motor have dual sealed bearing shafts for longevity and strength
- Includes a 25 lb pail of YADW896B Biodegradable Soap Concentrate

- Also includes an integral oil skimmer and pump reservoir filter to remove oil and grease, helping maintain cleaning effectiveness
- Double intake filtration system has a perforated steel screen filter with a sludge trap
- Rugged 12-gauge steel construction with solid welded seams

Specifications	PBC57A	PBC58
Depth, inches (mm)	35 (889)	35 (889)
Reservoir Capacity, gal	60	60
Electrical Requirements	230 V AC, 60 Hz	230 V AC, 60 Hz, 60 A
Pump Motor, HP	2	3
Output Pressure, PSI	45	45
Volume, gallons per hour	2,700	2,880
Heater, watts	9,000	9,000
Open Height, inches	69	81
Inside Dimensions, inches	35 W x 35 D x 41 H	36 W x 35 D x 54 H
Overall Dimensions, inches	53 W x 43 D x 69 H	53 W x 43 D x 81 H

European Model: PBCH57AEUR (230 V AC, 50 Hz)

CE

PBC57A High-Pressure Automatic Parts Washer

- Automatically cleans parts with a 45 PSI heated soap solution spraying from 20 high-pressure nozzles at 40 GPM

PBC58 High-Pressure Heavy-Duty Automatic Parts Washer

- Automatically cleans parts with a 45 PSI heated soap solution spraying from 24 high-pressure nozzles at 42 GPM

PBC55-1 Parts Basket

- Perforated steel basket is perfect for holding small parts

PBC55-3 Parts Tree

- Welded steel tube rack for hanging smaller parts

PBC58-3 Parts Tree

- 45" tall rack for hanging smaller parts

Air Agitated Immersion Cleaner

PBD16 Air Agitated Immersion Cleaner

- Use with parts degreaser or carburetor cleaner
- Heavy-duty air motor rotates the basket in both directions
- Cover has a locking band that seals the unit
- 4-1/2" deep basket has a hook for draining parts from top of pail and holes for holding extra-small parts
- Overall height of 32"
- Base diameter of 14-1/2"
- Requires 5 CFM @ 100 PSI



PBD16

- Do not direct air or fluid stream at body.
- Use only in well-ventilated area.
- Do not expose solvent to flames, sparks, or other sources of ignition.
- Do not use washer without fusible link or safety valve intact.
- Read Safety Precautions on pages W1–W4





GA503



GA501A



YA452

Parts Cleaning Brushes/Solvent Based

GA503 Round Angled Parts Cleaning Brush (Blue-Point®)

- Angled round brush design
- Attaches to most parts washers

GA501A Parts Cleaning Brush (Blue-Point®)

- Stiff bristles with contoured, non-slip plastic handle
- 11-1/4" long

YA452 Parts Cleaning Brush (Blue-Point®)

- Stiff bristles with contoured, non-slip plastic handle
- Attaches to most parts washers
- Flared hose end fits 1/4" spouts; 24" long hose has an internal spring to prevent kinking



YADW896B

Cleaning Solutions for Aqueous-Based Parts Washers

PBA733 Certified Green Concentrate Solution

- Specially formulated solution does not absorb oil and dirt
- For use in PBC33A and B Parts Washers
- Comes in a 5-gallon container; makes 20 gallons of solution

PBA734 Cleaning Solution Additive

- Used in both PBC3022 and PBC33B for an added boost of cleaning power

PBA735 Certified Green Concentrate Solution

- Same as PBA733 except 1-gallon container

YADW896B Powdered Soap Cleaner

- Low-foaming powdered soap solution
- For use in PBC57A and PBC42B Parts Washers
- Comes in a 25 lb container; makes 60-120 gallons of solution



PBA760

Petroleum-Based Solvent Cleaners

PBA760 Solvent Cleaner

- Excellent for removing oil and grease
- Petroleum-based cleaner with 140 flash point
- For solvent-based parts washers only
- Comes in a 5-gallon container



PBA725

Solvent-Based Parts Washer Accessories

PBA725 Parts Basket

- Hangs inside solvent based parts washers

PBA720A Drain Table

- Attaches to the outside of a parts washer
- Measures 25-1/2" W x 18-1/2" D

PBD1751 Parts Tray

- Attaches to outside of parts washer
- Measures 12-1/2" W x 18-1/2" D



PBA720A



PBD1751

Filtration Kits/Mud Buckets/Accessories

PBA720A Drain Table

- Attaches to the outside of a parts washer
- Measures 25-1/2" W x 18-1/2" D

PBD1751 Parts Tray

- Attaches to outside of parts washer
- Measures 12-1/2" W x 18-1/2" D

PBD32220 Replacement Clay Bag Filter

- Replacement clay bag filter for PBD3222, PBC3222, PBC4822 and PBCA4822 parts washers
- Fits in tub

PBD32223A Replacement Sludge Filter

- Replacement cartridge sludge filter for PBD32222 parts washer
- Fits in barrel



Water Nozzles and Hoses

NOZZLEGRP[†] Snap Grip Hose Nozzle with Shutoff

- Handle grip can be placed into a pistol or inline position
- Lock button keeps handle in position until released
- Adjustable spray nozzle transitions from delicate fan to powerful jet
- On/Off lever allows for quick water supply shut-off without changing spray pattern
- Precision machined inlet port provides an uninterrupted direct flow path of water
- Made of machined aircraft aluminum, stainless steel, Santoprene[®] rubber and durable plastic housing
- Recommended supply hose 5/8" I.D. for best performance

NOZZLELF[†] Power Jet Low Flow Nozzle

- On/Off lever quickly shuts off water flow and easily adjusts pressure
- Multiple spray patterns for any job—power jet to fan to low flow
- Low- and high-efficiency water flow via direct port injection
- 360° hose inlet swivel prevents hose kinking
- Screen insert prevents debris from clogging nozzle

NOZZLESG[†] Dual Action Foaming Soap Gun

- Compact design reduces excess soap usage and provides a controlled spray pattern in confined areas
- Quick-connect release collar easily transforms gun from soaping to rinsing application
- High-efficiency nozzle with cat's-eye spray pattern automatically balances pressure to effectively rinse surfaces
- 1.2 L soap container for use on multiple vehicles
- Molded graduations on container for ease of mixing exact proportions of soap and water
- Aircraft aluminum overmolded nozzle with firefighter-style lever
- Works with a standard garden hose
- 360° hose inlet swivel prevents hose kinking and features screen insert to prevent debris from clogging nozzle

Hose Reels

YA730D[†] Heavy-Duty Air/Water Hose Reel

- 50' of 3/8" I.D. low-pressure rubber hose
- Adjustable ball stop
- 24" connecting hose
- High carbon steel retraction spring
- Guide arm adjusts to four positions


YA730D

NOZZLEFN[†] Fireman's Nozzle

- On/Off fireman's lever for quick shutoff
- Multiple spray patterns from fan to jet to off
- Aircraft-grade aluminum barrel and internal housing
- Comfortable ergonomic grip for control
- Direct port injection for high-efficiency water flow
- Hose inlet has a 360° swivel connector to keep hose from coiling or kinking

JETWASHER Air Water Jet Washer

- Combines compressed air and water to create a powerful jet washer
- Provides safe and effective cleaning
- Separate air and water controls
- Multifunction—rinse, clean or dry with air and water
- Wide nozzle design prevents splash-back
- Lightweight and compact
- Durable nylon components will not scratch surfaces
- Includes a 3/4" threaded garden hose connection and quick-connect adaptor
- Optional stepped nozzle can be used to flush coolant systems and heater cores

JETWASHFAN Jet Washer Fan Nozzle

JETWASHNOZL Jet Washer Flushing Nozzle (Optional)

YA297[†] Water Saving Hose Nozzle (Blue-Point[®])

- Provides concentrated pressure stream
- Features a special rocker-actuated check valve
- Fits standard garden hose threads
- 9" long

GA299[†] Air Solvent Gun (Blue-Point[®])

- Used for degreasing or applying oils
- Quickly converts to long-wand air gun
- Operates on 35–175 PSI
- 8' hose for siphoning chemicals into gun
- For hoses with 1/4" NPT male fitting
- Shaft length of 10-1/2"; overall length of 16-1/2"

Colors Available



Red Orange Green

* ORG GRN

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



- Do not direct air or fluid stream at body.
- Use only in well-ventilated area.
- Do not expose solvent to flames, sparks, or other sources of ignition.
- Do not use washer without fusible link or safety valve intact.
- †These products can expose you to chemicals which are known to the state of California to cause cancer and reproductive harm. See pages P1–P2 for details.
- Read Safety Precautions on pages W1–W4

PRESSURE WASHERS: COLD WATER



SEPW1500P



SEPW1500SM



SEPW1000



SEPW1500USA

Electric Power (Cold Water)

Adjustable 0–60° spray nozzle and GFCI protection with 35' power cord.

Specifications	SEPW1500P [‡]	SEPW1500SM [‡]	SEPW1000 [‡]	SEPW1500USA [‡]
Style	Hand Carry	Wall Mounted	Cart Mounted	Cart Mounted
PSI (bar)	1,450 (100)	1,450 (100)	1,000 (69)	1,500 (103.5)
GPM (L/min)	2 (7.6)	2 (7.6)	2 (7.6)	2 (7.6)
Horsepower, HP	2	2	1.5	2
Voltage	120 V/20 A/single phase	120 V/20 A/single phase	120 V/15 A/single phase	120 V/17 A
Chemical Tank Capacity	—	—	1 gal	—
Pump Max. Temperature	140 °F	180 °F	140 °F	140 °F
Thermal	Mechanical	Mechanical	Mechanical	Mechanical
Hose Length, feet	26	25	25	25
Dimensions (L x W x H)	18 x 12 x 11"	20 x 12 x 20"	21 x 16 x 36"	30 x 21-1/2 x 36"
Shipping Weight, lb	68	98	65	150



SEPW2700G

Gas Engine (Cold Water)

Interchangeable or adjustable 0–40° spray nozzle, plus powder-coated tube frame cart with pneumatic tires.

Specifications	SEPW2700G [‡]
Style	Cart Mounted
PSI (bar)	2,700 (183.3)
GPM (L/min)	3 (11.4)
Engine	196 cc
Fuel Tank Capacity	3.9 qt
Chemical Tank Capacity	3 gal
Thermal	165 °F
Dimensions (L x W x H)	30 x 21-1/2 x 36"
Engine Displacement, cc	196
Shipping Weight, lb	108



SEPW30SHDE



SEPW2725SHDE

Heats water to 200°F. Includes ceramic plunger pump with stainless steel valves, trigger gun, interchangeable nozzles, chemical injection, adjustable pressure, stainless steel cold wrap-around coil, poly fuel tanks and GFCI protection. Powder-coated tube-frame cart with pneumatic tires for extra durability.

Electric Power (Oil-Fired)

Specifications	SEPW14SHDE†	SEPW20SHDE†	SEPW30SHDE†	SEPW2725SHDE†
PSI (bar)	1,450 (100)	2,000 (138)	3,000 (207)	2,700 (186)
GPM (L/min)	2 (7.6)	4 (15.2)	4 (15.2)	—
Horsepower, HP	2	5	7.5	5
Voltage	120 V/20 A/single phase	230 V/25 A/single phase	230 V/34 A/single phase	230 V/25 A/single phase
Burner Fuel Capacity, gal	5	5	5	—
Dimensions (L x W x H)	34 x 27 x 47"	34 x 27 x 47"	34 x 27 x 47"	34 x 27 x 47"
Shipping Weight, lb	350	570	600	430
Hose Length, feet	50	50	50	50

Gas Engine (Oil Fired)

Specifications	SEPW3000QH‡
PSI (bar)	3,000 (207)
GPM (L/min)	4 (15.2)
Engine Displacement, cc	389
Fuel Tank Capacity, qt	6.9
Burner Fuel Capacity, gal	5
Dimensions (L x W x H)	54 x 32 x 49"
Shipping Weight, lb	600
Hose Length, feet	50



SEPW3000QH

VACUUMS/SHOP FANS: VACUUMS

Handheld Vacuums

AV1000A Deluxe Air Vacuum Kit (Blue-Point®)

- Ideal for vehicle media body shops or any applications that require picking up dust, metal shavings or broken glass
- Includes 8.7" aluminum extension tube, pointed nozzle, flexible tube and crevice tool with brush
- Large collection bag includes a debris baffle and sliding bag clamp for emptying debris
- Lightweight ergonomic handle design



AV1000A

- Do not direct air or fluid stream at body.
- Use only in well-ventilated area.
- Read and follow safety messages in the instructions.
- ‡These products can expose you to chemicals which are known to the state of California to cause cancer and reproductive harm. See pages P1-P2 for details.
- Read Safety Precautions on pages W1-W4





SOVAC16

Wet/Dry Vacuums

Industrial strength full wet/dry cleaning and drying machines combine the highest degree of suction/airflow with ruggedly durable motors. Highest quality materials ensure long life. Ball bearing motor is designed for a strong performance with less motor strain. Engineered for easy portability and long life..



YA1023A



YA1105A



YA1009SSA

Specifications	SOVAC16	YA1023A [†]	YA1105A [†]	YA1009SSA [†]
Tank	16 gal Polypropylene	23 gal Polypropylene	Corrosion-Resistant	Corrosion-Resistant
Casters	Large Rear/Swivel Front	Large Rear/Swivel Front	4 Swivel	Large Rear/Swivel Front
Waterlift	—	93"	93"	93"
Motor	2-Stage	2-Stage	2-Stage	2-Stage
CFM	125	99	99	99
Approvals	UL® and cUL	UL® and cUL	UL® and cUL	UL® and cUL
Operation	Full Wet and Dry	Full Wet and Dry	Full Wet and Dry	Full Wet and Dry
Filter Assembly	Foam and Cartridge Filter	YAT90448	YAT24519	YAT90445
Includes	10' Hose (1-1/2" dia.), Foam Filter, Cartridge Filter, Dust Collection Bag, Crevice Tool, Utility Nozzle, Car Nozzle and Round Brush	1.5" Wet/Dry Tool Set (Hose with Swivel End, Crevice Tool, Upholstery Tool, (2) Straight Extensions, Floor Tool Housing with Carpet Face, Squeegee Face)	1.5" Wet/Dry Tool Set (Hose with Swivel End, Crevice Tool, Upholstery Tool, (2) Straight Extensions, Floor Tool Housing with Carpet Face, Squeegee Face)	1-1/2" Wet/Dry Tool Set (Hose with Swivel End, Crevice Tool, Upholstery Tool, (2) Straight Extensions, Floor Tool Housing with Carpet Face, Brush Face, Squeegee Face)
Filtration	—	Cone and HEPA Cartridge	Cone	Cone



YA1102

Portable Spotters

YA1102 Portable Spotter

- Use on carpeting, seat fabrics and other cleaning needs
- Durable molded tank
- Large 2-gallon capacity
- Powerful 55 PSI solution pump motor
- Strong recovery with 94 CFM vacuum rating
- Quick disconnect solution hose at the body
- Includes hose and hand tool
- UL® and CSA® listed
- ETL and cETL listed
- 84" water lift
- Bypass 1.2 HP motor

Shop Fans

WIND100A Heavy-Duty Air Mover

- Meets OSHA® standards for size and weight
- Maximum 3,758 FPM of air movement
- Adjustable kickstand with three operating positions
- Three-speed switch for controlled drying
- Space saver stackable design takes up less room in storage
- Easy to transport with optional telescoping handle for portability

Specifications	WIND100A
Power	120 V AC/60 Hz
Speeds	3 speeds / 1 off
Air Delivery, Velocity (FPM)	2,100; 3,000; 3,200
Airflow Direction, degrees	0, 12, 90
High-Output Fan Size, inches	10-1/2 x 8-1/2
Motor	.6 HP
Motor Rating	Continuous-Duty
Power Cord Length, feet	18-1/2
Size (L x W x D), inches	17.2 x 15.3 x 18-1/2


WIND100A

WIND200

WIND200[‡] 1,200 CFM Blower Fan (Blue-Point®)

- 120 V, 60 Hz
- 2.0 A rated power
- Moves air up to 1,200 CFM
- Three position switch control for 1,400, 1,500 and 1,600 RPM speeds
- Built-in overload protection
- 2 pc 11 A built-in grounded receptacles
- Impact-resistant ABS housing materials
- 8-1/2' cord length
- Four-position adjustment feet
- 15.9 lb


WIND300

WIND300[‡] 300 CFM Blower Fan (Blue-Point®)

- 120 V, 60 Hz
- 1.0 A rated power
- Moves air up to 300 CFM
- Three position switch control for 1,400, 1,500 and 1,600 RPM speeds
- Built-in overload protection
- 2 pc 11 A built-in grounded receptacles
- Impact-resistant ABS housing materials
- 8-1/2' cord length
- Four-position adjustment feet
- 11.5 lb


WINDHEATER

WINDHEATER[‡] Weather Attachment for WIND300 (Blue-Point®)

- 1,320 W, 120 V
- 11 A, 500 BTU
- Converts blower into a heater
- Clips securely onto the front of the blower and plugs into one of the outlets on the side of the blower
- 14 AWG SJT cord with a grounded plug


CTAB9050

Blowers

CTAB9050 18 V MonsterLithium Cordless Blower (Tool Only)

- Brushless motor means superior durability, longer tool life and maximum run time
- Get the job done with a maximum air speed of 100 MPH
- Maximum air volume of 450 CFM and 14,800 RPM for quick turnaround time
- 15' clearance range
- High/Low switch for proper air speed
- Balanced, lightweight design
- Run-time is approximately: High, 10 minutes; Low, 20 minutes
- Operates on 4.0 or 5.0 Ah batteries
- Built-in hook for easy hanging
- Batteries and charger not included


KAFANPBO

Workcenter Accessories

- Accessories are designed to fit all slotted systems found on workcenters and on accessory side panels for roll cabs and carts

KAFANPBO* LED Clock, Two-Speed Fan

- Real-time and temperature LED display (Celsius and Fahrenheit)
- Low-voltage fan can plug directly into an outlet or USB port
- Two-speed: low/high
- Compact design with oscillation and adjustable angle
- Magnetic base (10 lb) allows the fan to stand vertically or horizontally

Colors Available



* Black Red Orange Green

PBO PJK PJJ

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



- Read and follow safety messages in the instructions.
- †These products can expose you to chemicals which are known to the state of California to cause cancer and reproductive harm. See pages P1-P2 for details.
- Read Safety Precautions on pages W1-W4