



Safe & Reliable Industry Lighting Tools

NICRON[®]

MALAYSIA

Professional Industry Lighting Manufacturer





Zoomable Flashlight Series

F81



Rechargeable Li-ion Battery



USBCable



ZOOM

Brightness Run Time

1000_{LM}

20_H

66m

1100cd

IP65

1m

Zoomable Rechargeable Flashlight 9W

F81 is a big size and high brightness rechargeable focus flashlight, type-C charging system, can easily be operated by single hand with one switch, push and pull to zoom by one hand. Suitable for industry, automotive, etc.



ANSI/FL1	Max	High	Med	Low	Strobe	SOS
Brightness	1000	500	150	50	100	150
Run Time	2H	4H	7H	20H	/	/
LED	CREE XP-L V5					
Battery	18650 Li-ion Battery, 2600mAh Full charged time 6 hrs, 300times					
Weight	156g (without battery)					
Size	Length 163mm × Max dia 35mm × Dia26mm					
Package	PVC-color box, 5/20 per carton, Flashlight, Battery, Micro-USB Cable					



Type-C charging



Zoom



Rechargeable Li-ion Battery



USB Cable



ZOOM

Rechargeable Zoomable Headlamp 9W

Battery cabin at back side, keep the balance between beam distance and run time. With safety belt to keep the position.



H30F

Brightness Run Time

900_{LM}

5.5_H

140m

7000cd

IP65

2m



Rotated Zoom



USB Charger with indicator

ANSI/FL1	High	Med	Low	Strobe	SOS
Brightness	900	450	200	900	900
Run Time	2H	2.5H	5.5H	/	/
LED	CREE XM-L2 U2				
Battery	18650 Li-ion Battery, 3400mAh Full charged time 6 hrs, 300times				
Weight	195g (without battery)				
Size	78mm × 50mm × 44mm				
Package	PVC-color box, 0/10 per carton, Headlamp, Battery, Micro-USB Cable, Headband, Helmet holder				



HIGH PERFORMANCE FLASHLIGHT SERIES



Rechargeable
Li-ion Battery




Tactical

B400

Crazy Bright Tactical Flashlight 116W

Wide-angle beam design, high-class flashlight.
Suitable for searching, security, photography,
industry lighting.

Brightness	Run Time
12000 _{LM}	33 _H
346m	30000cd
IP67/1m	1m

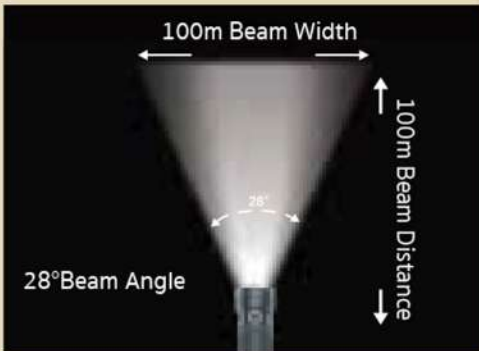

ANSI/FL1	Crazy	Maz	High	Med	Low	Lower	Strobe	SOS
Brightness	12000	6000	3000	1000	500	200	6000	6000
Run Time	2.5H	2.5H	4H	7H	14.5H	33H	/	/
LED	4* CREE XHP70B-N4							
Battery	4*18650 Li-ion Battery, 3000mAh Full charged time 6 hrs, 300times							
Weight	426g (without battery)							
Size	152mm × 64mm × 56mm							
Package	Gift-box, 0/6 per carton, Flashlight, Battery, DC-charger, Car-charger, Packbag							



DV-Charger 12V
& Car Charger



Portable bag
& Photography tripod



Battery Volume
Indicator



4 CREE LED
29W each



DC charging



Innovation double
step smart button

B200

Brightness	Run Time
1000 _{LM}	12 _H
536m	72000cd
IP68/2m	2m



Long Beam Distance Tactical Flashlight 9W

With 536 beam distance, 1000 lumens, and good waterproof. Widely used in industry lighting, searching, electronic area, etc.

ANSI/FL1	High	Med	Low	Strobe	SOS
Brightness	1000	300	100	1000	1000
Run Time	3H	3.5H	12H	/	/
LED	CREE XP-L HI V2				
Battery	2*18650 Li-ion Battery, 2600mAh Full charged time 6 hrs, 300times				
Weight	370g (without battery)				
Size	Length 235mm × Max dia 59mm × Dia31mm				
Package	PVC-Color Box, 5/10 per carton; Flashlight, Battery*2, Micro-USB Cable				



USB-Micro charger



Attack head



Rechargeable Li-ion Battery

USB Cable

EDC

Tactical

Slim Tactical High Brightness Rechargeable Flashlight 9W

Slim size, good waterproof, portable design, safe and reliable, long run time, suitable for EDC, industry and outdoor work, ect.



Focus Lighting

ANSI/FL1	Max	High	Med	Low	Lower	Strobe	SOS
Brightness	1000	330	120	40	10	950	950
Run Time	2.5H	6H	10H	25H	80H	/	/
LED	CREE XH-L HD V5						
Battery	18650 Li-ion Battery, 2600mAh Full charged time 6 hrs, 300times						
Weight	80g (without battery)						
Size	Length 128mm × Max dia 28mm × Dia26mm						
Package	PVC-color box, 5/20 per carton, Flashlight, Battery, Micro-USB Cable, Wrist strap						



B62

Brightness	Run Time
1000 _{LM}	60 _H
170m	7200cd
IP67/1m	1m

B11

Brightness	Run Time
950 _{LM}	7 _H
167m	7000cd
IP67/1m	1m

Mini Rechargeable Tactical Flashlight 9W

With good water resistance, high brightness, Smart double switch to change any mode. Suitable for EDC, industry, or outdoor work, etc.



Rechargeable Li-ion Battery

USB Cable

EDC

Tactical

ANSI/FL1	Max	High	Med	Low	Strobe	SOS
Brightness	950	300	160	70	950	950
Run Time	1.5H	2H	3H	7H	/	/
LED	CREE XP-L HI V2					
Battery	18350 Li-ion Battery, 1100mAh Full charged time 4 hrs, 300times					
Weight	80g (without battery)					
Size	Length 80mm × Max dia 28mm					
Package	PVC-color box, 5/20 per carton, Flashlight, Battery, Micro-USB Cable					



Pen Light Series



B24R

Brightness	Run Time
120 _{LM}	1.5 _H
75m	1400cd
IP65	1m

Rechargeable Penlight with laser 1W

B24R is professional indicated flashlight, red laser up to 100 meter distance, It works for illumination and communication between workers, can make everything understand well when work, it is suitable for construction, electrical, ship industry, aviation range, etc. B24R is dual-fuel flashlight, standard package with 10840 innovation slim li-ion battery, and also can use 2AAA dry battery.



ANSI/FL1	High	Laser	White+Laser
Brightness	150	/	/
Run Time	1.5H	/	/
LED	LIUMILEDS		
Battery	1*10840 Li-ion Battery (700mAh, charge time 4hrs, 300 times); or 2*AAA		
Weight	60g (without battery)		
Size	Length 151mm × Max dia 28mm		
Package	PVC-color box, 5/20 per carton, Flashlight		

3 modes and laser guiding.



Class 3A Laser
Wavelength 650nm
Avoid direct eye exposure



Portable

B73R

Brightness	Run Time
150 _{LM}	8 _H
51m	650cd
IP65	1m



90° Twist Rechargeable Penlight with Magnet 3W

B73R series is pen size angle flashlight, work for narrow place or mount on body easy for work like electric, automotive repairing etc., B73R is dual-fuel flashlight, standard package with 10840 innovation slim li-ion battery, and also can use 2AAA dry battery.



ANSI/FL1	High	Low	Strobe	SOS
Brightness	150	60	150	150
Run Time	2.5H	8H	/	/
Brightness	150	60	150	150
Run Time	2.5H	8H	/	/
LED	SAMSUNG			
Battery	1*10840 Li-ion Battery (700mAh, charge time 4hrs, 300 times); or 2*AAA			
Weight	51g (without battery)			
Size	Length 152mm × Max dia18mm × Dia15mm			
Package	PVC-color box, 5/20 per carton, Flashlight, (Battery)			



90° Twist Flashlight Series

NICRON adjustable head flashlight can free user's hands, wide angle lighting design, with UV light, or with red+green light, magnet tail to handle complex environment.

B007


Mini Rechargeable Twist Flashlight 7W

B007 is a mini size twist flashlight with 780lm brightness and 3 optional colors, work for Everyday carried, It is dual-fuel , standard package with 14500 or 1AA dry battery.



Brightness	Run Time
780 _{LM}	7 _H
126m	4000cd
IP65	1m

Color



ANSI/FL1	High	Med	Low	Strobe	SOS
Brightness	780	250	100	700	700
Run Time	1H	2.5H	7H	/	/
Brightness	100	30	10	100	100
Run Time	4H	20H	35H	/	/
LED	SAMSUNG LED				
Battery	14500 Li-ion Battery, 750mAh Full charged time 4 hrs, 300Times				
Weight	56g (without battery)				
Size	Length 112mm × Max dia21mm × Dia185mm				
Package	PVC-color box, 5/20 per carton, Flashlight, Battery, Micro-USB Cable				

CAMO



360° Rotated Clip

90° Twist Head

Magnet

B75

Rechargeable Twist Flashlight with UV light 10W

B75 angle flashlight is a professional innovative flashlight, suitable for automotive, industrial range and anyother ranges that need 395nm UV lighting for test or long-time work. The patent rotatable head and magnet tail satisfy hands-free work at different lighting angle demands.



Brightness	Run Time
1000 _{LM}	20 _H
109m	3000cd
IP65	1m

ANSI/FL1	High	Med	Low	UV
Brightness	1000	500	100	395nm
Run Time	3H	4H	20H	7H
LED	Samsung LED, UV-700mW/395nm			
Battery	18650 Li-ion Battery, 2600mAh Full charged time 6 hrs, 300times			
Weight	160g (without battery)			
Size	Length 160mm × Max dia 28mm			
Package	PVC-color box, 5/20 per carton, Flashlight, Battery, Type-C Cable			



One switch control, Battery volume indicator



Long press to switch modes

EXH90



Rechargeable
Li-ion Battery



EX



Brightness Run Time

170_{LM}


16_H

170m

9600cd

IP65

2m



Flood/Spot light adjustable.

Anti-Explosion Headlamp

EXH90 is a rechargeable headlamp with battery inset.

ANSI/FL1	High	Low	Strobe
Brightness	170	48	170
Run Time	8H	16H	/
Explosion Sign	Fxb II CT4 Gb		
Applicable Temperature	-20°C ~ +45°C	Application	1 Division 2 Division
Rated Power	1W - 3W	Rated Voltage	3.7V
Relative Humidity	≤95%RH(25°C)		
LED	CREE XP-E2 R3 LED		
Battery	1*Li-ion Battery (1600mAh, insert) Charge time≤8H, 1000times		
Weight	88g(Built-in battery)		
Size	Length60mm × Width51mm × Height50mm		
Package	Color Box, 5/20pcs per Carton, Flashlight Battery, DC-charger, Headband, Helmet holder		

EXB701

Anti-Explosion Twist Flashlight

EXB701 is a rechargeable Explosion-proof Bendable Flashlight with red and green signature lamp.



Rechargeable
Li-ion Battery



EX



Magnet

Brightness Run Time

100_{LM}

40_H

63m

1000cd

IP64

2m



White+Green+Red

ANSI/FL1	High	Low	Strobe
Brightness	100	30	100
Run Time	12H	40H	/
Explosion Sign	Exib II CT4 Gb		
Applicable Temperature	-20°C ~ +45°C	Application	1 Division 2 Division
Rated Power	1W - 3W	Rated Voltage	3.7V
Relative Humidity	≤95%RH(25°C)		
LED	CREE LED		
Battery	1*18650 Li-ion Battery (2600mAh, insert) Charge time≤6H, 1000times		
Weight	153g (without battery)		
Size	160mm × 28mm		
Package	PVC-color box, 5/20per carton, Flashlight, Battery, Micro-USB Cable, Charger		



Body Lamp



USB Charger



ANTI -EXPLOSION

NICRON Anti-Explosion series certified by China National Quality Assurance, anti-explosion performance, can work at combustable and explosive site environment District1, District2 and IIA/ IIB /IIC



EXB90



Rechargeable
Li-ion Battery



EX



Brightness	Run Time
200 _{LM}	20 _H
196m	9600cd
IP65	2m

Slim Anti-Explosion Flashlight

Suitable for gas station, petrochemical industry, chemical industry, fire control.

ANSI/FL1	High	Low	Strobe
Brightness	200	60	200
Run Time	8H	20H	/
Explosion Sign	Fxb II CT4 Gb		
Applicable Temperature	-20°C ~ +45°C	Application	1 Division 2 Division
Rated Power	1W - 3W	Rated Voltage	3.7V
Relative Humidity	≤95%RH(25°C)		
LED	CREE XP-E2 R3 LED		
Battery	1*18650Li-ion Battery (2200mAh, insert) Charge time≤8H, 1000times		
Weight	175g (without battery)		
Size	Length 160mm × Max dia 35mm × Dia 28mm		
Package	Color Box, 5/20pcs per Carton, Flashlight Battery, DC-charger		



DC charger at tail

EXB93

Compact Anti-Explosion Flashlight

EXB93 is an anti-impact flashlight with indicator switch.

Brightness	Run Time
250 _{LM}	16 _H
258m	20400cd
IP66	9m



Rechargeable
Li-ion Battery



EX

Charger indicator



Red: Charging Green: Full charged

ANSI/FL1	High	Low	Strobe
Brightness	250	80	250
Run Time	8H	16H	/
Explosion Sign	Fxb II CT4 Gb		
Applicable Temperature	-20°C ~ +45°C	Application	1 Division 2 Division
Rated Power	1W - 3W	Rated Voltage	3.7V
Relative Humidity	≤95%RH(25°C)		
LED	CREE XP-G2 R5 LED		
Battery	1*18650Li-ion Battery (2200mAh, insert) Charge time≤8H, 1000times		
Weight	215g(Built-in battery)		
Size	Length192mm × Max dia52mm		
Package	Color Box, 5/20pcs per Carton, Flashlight Battery, DC-charger		

SERIES

ance Authority with
e. Limited to use in the air