

ProAlign® Alignment Systems

Optimized for speed and efficiency





QuickGrip® wheel adaptors & high-definition target

Hunter's patented QuickGrip* adaptors and highdefinition targets accelerate service with set-up times in seconds instead of minutes...



PATENTED

Extremely Fast Installation

- Spring-loaded arms grip the tire
- Thumb switch secures the clamp
- Off-center clamping has no effect on accuracy



PATENTED

Avoid Damage to Expensive Rims

- Grips tire, not rim
- No metal-to-metal contact
- Only protective ring contacts rim





PATENTED

Less Weight

- Weighs only 3.3 kg (7.4 lbs.)
- Nearly 40% lighter than previous designs



QuickComp"!

Compensate all wheels and capture initial measurements in one motion.









Low Maintenance

- Shop-tough polymer structure withstands drops
- No electronics, cables or calibration
- Only occasional cleaning required

PATENTED

Revolutionary adaptor design!



- Faster setups!
- ✓ No metal-to-metal contact!
- ✓ No knob twisting!

PATENTED

Quick-Change Hooks



One set of hooks fits most applications

PATENTED

Deep-Wheel Extension



- ✓ Deep rims or protruding hubs, no problem
- Standard accessory



Alignment measurements in just minutes!

ProAlign* alignment systems using HawkEye* digital imaging technology offers shops alignment service optimized for speed and efficiency with simple operation and low cost of ownership.

Digital cameras measure the position and orientation of the wheels with pinpoint accuracy using reflective targets.



1. Select the Vehicle

Recall specifications




2. Measure Angles

- Install targets
- Capture measurements
- ✓ Review "before" results



3. Make Adjustments

- Follow the adjustment instructions
- Print before-and-after results

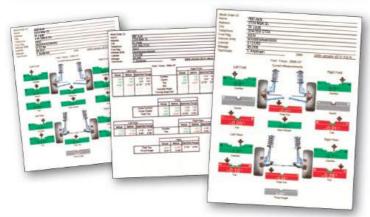

Present Your Results!

- Sell more alignments
- Generate greater profits



Perform alignments at ANY height

The versatility of the HawkEye® digital imaging technology allows shops to perform alignments on the floor or at any lift height.



Camera height is easily adjusted from the side of the unit.

PATENTED


Reduce long-term cost of ownership

The reflective wheel targets provide a low cost of ownership and require virtually no maintenance.

- ✓ No electronics at the wheel
- No cables or batteries
- No downtime from accidental drops




Powerful software features reduce alignment times and increase productivity!



EXCLUSIVE


WinToe® Adjustments


Ensure a straight steering wheel every time without repeated adjustments or using a steering wheel holder.



Shim-Select® II

Eliminate confusing shim charts and tables. Shim-Select* Il quickly calculates and displays the template you need for proper shim installation.

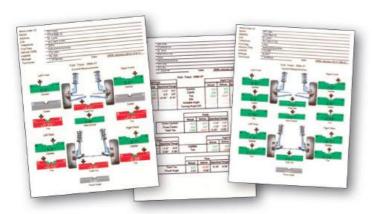




EXCLUSIVE

Control Arm Movement Monitor

Cut adjustment times in half for front-shim, dual-cam or dual-slot vehicles. Step-by-step graphics let you get it right on the first try.



Easy-To-Follow Illustrations

Over 500 adjustment illustrations provide diagrams and instructional information of recommended Original Equipment Manufacturer (OEM) adjustment methods.

ProAlign® printouts help sell work

Explain needed parts and repairs and show completed work to customers using detailed, color-coded printouts.

Clear and detailed printouts help you communicate and build rapport with your customers and sell more alignments.



Console configurations







Models

PA210E - Mobile console (Not compatible with HS222CMAE sensors)

Console dimensions 1486 mm (H) x 699 mm (W) x 597 mm (D) 58.5 in. (H) x 27.5 in. (W) x 23.5 in. (D)

PA220E - Column-mount console (For HS222FCAE and HS222MLAE sensors)

Console dimensions 1016 mm (H) x 914 mm (W) x 534 mm (D) 40 in. (H) x 36 in. (W) x 21 in. (D)

PA260E - Mobile console (For HS222CMAE sensors)

Console dimensions 1651-1727 mm (H) x 813 mm (W) x 635 mm (D) 65-68 in. (H) x 32 in. (W) x 25 in. (D)

Power requirements 100-240V, 3.5A-1.75A, 1PH, 50/60Hz

Monitor is not included with mobile or column-mounted consoles.

Standard equipment

- Brake pedal depressor
- ✓ Steering wheel holder ✓ Mo
 - der

 Mouse pointing device

Keyboard*

Optional equipment

20-2072-1 XF Pod kit

20-2910-1 Hand-held, XF Remote Control and XF Pod

20-2882-1-E Icon Cordless Remote Indicator**

are mobile to service

multiple alignment bays and

feature adjustable heights.

Compatible with PA260E

mobile cabinet only.

mount scissor lift making

service bays handling

vehicles with minimum

ground clearance.

them ideal for drive-through

20-2881-E Icon Remote Indicator

20-2531-1 Standard mechanical turnplate (set of 2)
20-2532-1 Stainless steel mechanical turnplate (set of 2)

HawkEye® sensor configurations

configuration fits most

service bay applications.

Space-saving HawkEye® sensors offer enhanced productivity in a small footprint.

HawkEye® sensors can be installed within 25 mm (1 in.) of a wall, saving space at the front of your bay.

	HS222FCAE	HS222MLAE	HS222CMAE	HS222WMAE	
Mounting type	Floor	Floor	Cabinet	Wall/ceiling	
Adjustable camera range	Not applicable	1460 mm (57.5 in.)	902 mm (35.5 in.)	Not applicable	
Mobile (bay-to-bay)			~		
Drive-through configuration				~	
		-			
	1		-	The	
	The fixed-column standard	Manually adjustable	Cabinet-mounted sensors	The wall- or ceiling- mounted sensors can be	
	configuration fits most	camera beam configuration	ara mobile to convice	paired with the RX flush-	

camera beam configuration

provides a range of motion

to achieve additional lift

height or to work with the

vehicle lowered to the floor.

^{*} If language is other than English, German, Spanish, or Russian, then keyboard is not provided.

^{**} Requires XF Pod Kit, 20-2072-1.



HunterNet* (HunterNetwork.com) provides front-shop personnel with quick, convenient access to a vast collection of vehicle-specific undercar information to help explain and sell service.

- Eliminate confusing technical conversations with easy-to-understand videos, animations and images
- Help your customers make informed decisions
- Drive repair authorizations to a new level
- Supplement other counter merchandising tools
- Make more informed pricing estimates
- Simplify training of service writers

Hunter Networking Accessories

WiFi Adaptor Kit - 20-3261-1

The PA200 wheel aligner can be connected to a workshop's existing local area network via an Ethernet (wired) connection or by installing the WiFi (wireless) adaptor kit.



Complimentary HunterNet® 1-year subscription

included with purchase of ProAlign wheel aligner.

Subscription valid for single-user only. Additional subscriptions required for multiple, simultaneous access.



Track statistics and generate reports

- Track alignment activity
- Store vehicle records to create customer history

Grow your equipment with your business!



WinAlign® with HawkEye Elite® upgrade

WinAlign* alignment software maximizes profit and productivity in your alignment bay.

- CodeLink® electronic steering reset tool (optional)
- ExpressAlign® procedures
- ✓ Live Ride Height measurements (optional)
- ✓ Tools & kits
- WebSpecs* online specification database
- 100s of additional power tools and training aides

Hunter's HawkEye Elite* alignment system saves valuable shop time and increases profits.

- Four high-resolution cameras
- QuickCheck* procedure capability
- Three-dimensional compact targets

PA220E cabinet not compatible with WinAlign® PC.

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

WinAlign, ProAlign, Hawkeye, Hawkeye Elite, WinToe, Shim-Select, Level Reminder, Cal-Check, CodeLink, ExpressAlign, WebSpecs, HunterNet, QuickGrip and QuickComp are registered trademarks of Hunter Engineering Company.

0118AHE

Copyright © 2018, Hunter Engineering Company



www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044, USA Tel: 314-731-3020, Fax: 314-731-0132 Email: international@hunter.com

Form 7451-TE-05, 01/18