

SmartWeight® Pro

Intuitive balancer with professional features



NEW





Key features at a glance

PATENT PENDING


Touch-free wheel measurement



- ✓ Ergonomic design
- ✓ More durable than Dataset® arms
- ✓ Full wheel measurement without contact

PATENTED

SmartWeight® technology



- ✓ Improves balance
- ✓ Minimizes weight usage
- ✓ Maximizes productivity

STANDARD

Intuitive interface



- ✓ Single-knob navigation simplifies experience
- ✓ 3D graphics



SWP70E shown with optional BullsEye® collet kit, HammerHead® top-dead-center laser, and wheel lift

STANDARD, PATENT PENDING

ExactPosition™



- ✓ Laser exactly identifies weight location
- ✓ Improves balance accuracy
- ✓ More durable than Dataset® arms

PATENTED

CenteringCheck®



- ✓ Ensures proper centering
- ✓ Eliminates setup errors and most common cause of comebacks

OPTIONAL


HammerHead® option





- ✓ Speeds clip-weight placement
- ✓ Improves balance
- ✓ Illuminates work area

EXCLUSIVE

On-demand videos



- ✓ Simplifies training
- ✓ Improves results
- ✓ Multiple languages  

EXCLUSIVE

Space-saving design

- ✓ Small-format maximizes shop space
- ✓ Hood design allows machine to be installed against wall





Touch-free measurement makes balancing easier

STANDARD, PATENT PENDING

Easily determine weight placement using laser vision system

- ✓ Simple dimension entry
- ✓ Automatic weight mode selection
- ✓ Indicates exact weight placement
- ✓ Eliminates most common cause of weight-chasing



STANDARD

Outer laser vision system

- ✓ Automatically measure wheel width as hood is lowered
- ✓ Improves balance accuracy



Achieve the best balance with SmartWeight

Save time & effort

- ✓ Single-weight solutions as much as **60% of the time**.
- ✓ Saves labor versus traditional two-weight solutions

Accommodate many wheel types

- ✓ Flanged or flangeless
- ✓ Plastic clad
- ✓ Colored rims
- ✓ Wider widths
- ✓ Run flats

Stop chasing weights

- ✓ Superior balance results in a single spin



Improves appearance

- ✓ Smaller weights are less visible
- ✓ Places weights on inside of wheel when possible

Track labor & weight savings

- ✓ Labor savings shown in minutes and hours as well as dollars with every spin.

Reduce weight usage

- ✓ **30% less weight used**
- ✓ Save money on every balance

Did you know?

Modern vehicles are approximately 4 times more sensitive to hop forces than wobble. Conventional balancers treat both the same.



EXCLUSIVE

Single-knob interface simplifies experience

50g

Clearly indicates correction weight amount



Rim cutaway displays selected weight mode




Switch text language

Balancing interface at a glance



Display rim dimensions



TruWeight* provides lifelike representations of actual correction weights



SmartWeight* panel displays wheel balance condition

Exclusive software features make balancing easier



On-screen instruction

- ✓ High-definition videos provide instruction on a variety of balancing topics
- ✓ Covers basic techniques and advanced procedures
- ✓ On-site training for your technicians
- ✓ Multiple languages



3D graphics

- ✓ Interactive display guides technicians through balancing procedures.
- ✓ Decreases training time


Popular equipment upgrades

PATENTED

HammerHead® top-dead-center laser



- ✓ Greater weight placement accuracy
- ✓ More single-spin balances improve productivity
- ✓ Overhead light illuminates work area



Ergonomic QuickNut

- ✓ Fast clamping with collapsing jaws
- ✓ Comfort-grip handles



BullsEye® centering system

- ✓ Optimize centering
- ✓ Prevent wheel damage



Wheel lift

- ✓ Avoid strain
- ✓ Safely service heavy, oversized wheels
- ✓ Aids wheel centering



Basic collet kit

- ✓ Handles most common wheel sizes
- ✓ Prevent wheel damage





Specifications

Power requirements	196-256V, 3 amp, 50/60 Hz, 1 ph (Power cable includes: NEMA 20 amp plug, L6-20P)
Air supply requirements*	7-12 bar (100-175 psi)
Capacity	
Rim width	38 – 508 mm (1.5 – 20 in.)
Rim diameter	254 – 762 mm (10 – 30 in.)**
ALU	191 – 965 mm (7.5 – 38 in.)**
Max. tire diameter	965 mm (38 in.)
Max. tire width	508 mm (20 in.)
Max. tire weight	61 kg (135 lbs.)
Imbalance resolution	± 1.0 g (0.05 oz)
Placement accuracy	512 positions, ± 0.35°
Balancing speed	150 rpm
Motor	Programmable drive system and DC motor

* Wheel lift models only.

** Extreme wheel sizes may require manual data entry.




Ordering information

SWP70E SmartWeight Pro wheel balancer with outer hood laser

Optional equipment

- 20-3062-1** Basic collet kit
- 20-2892-1** HammerHead® top-dead-center laser
- 20-3101-1** Wheel lift
- 20-2747-1** BullsEye® collet kit
- 76-574-2** Ergonomic QuickNut
- 20-1839-1** Flange plate

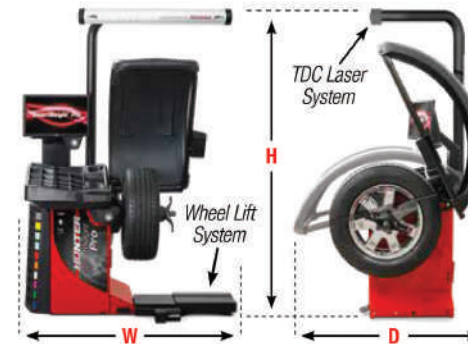

Width (W)	1346 mm* (53 in.)
Height (H)	1816 mm** (71.5 in.)
Depth (D)	832 mm (32.75 in.)
Weight	125 kg (275 lbs.)

* 1854 mm (73 in.) with wheel lift

** 2184 mm (86 in.) with TDC Laser System



Because of continuing technological advancements, specifications, models and options are subject to change without notice.

SmartWeight, BullsEye, HammerHead, CenteringCheck, DataSet and TrueWeight are registered trademarks of Hunter Engineering Company.

0319AHE

Copyright © 2019, Hunter Engineering Company

HUNTER
Engineering Company

www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044, USA
Tel: +1-314-731-3020, Fax: +1-314-731-0132
Email: international@hunter.com

Form 7463-TE-05, 03/19