

SPRING GEAR PUMPS

SPRING GEAR OIL PUMPS

- Designed to fit 20L or 60L drum and is ideal for transferring non-corrosive fluids of medium to heavy viscosity, such as engine oil, gear oil, transmission fluid, automotive additives, machine oil and lubricant
- Spring operated pump and unique swivelling pump head assembly allows the hose to follow the operator
- Gun holder to ensure the extra oil flows back into the pail to prevent spills and accidents
- Robust zinc pump head and steel pump body assembly ensure long working life

AVAILABLE IN 2 OPTIONS

SP65160

20 LITRE

SPECIFICATIONS:

- Pump type: Spring operated pump
- Flow: 300 ml / stroke
- Suction tube length: 325mm for 20 Litre Drum
- Inlet: 45mm O.D.
- Outlet: 17mm O.D with 1370mmL PVC hose & controllable oil gun
- Max. viscosity: 5,000 SSU

SP65162

60 LITRE

SPECIFICATIONS:

- Pump type: Spring operated pump swivelling pump head
- Flow: 500 ml / stroke
- Suction tube length: 535mm for 60 Litre drum
- Inlet: 48mm O.D.
- Outlet: 17mm O.D with 1370mmL PVC hose & controllable oil gun
- Wetted parts: Steel, Zinc, PE, PVC & NBR
- Max. fluid temperature: 140°F / 60°C
- Max. viscosity: 5,000 SSU



200L DRUM PUMPS

SP65170

DRUM PUMP LEVER ACTION 200 LITRE

- Used for dispensing or transferring non-corrosive and petroleum based fluids, such as diesel, kerosene, transmission fluid, machine oil, lube oil, fuel oil, anti-freeze, etc.
- Ideal for heavy-duty use in industrial, automotive and agricultural applications
- Self-priming unit
- Do not use with organic solvents, alkalis, acids & water-based fluids

SPECIFICATIONS:

- Flow: 400ml per stroke
- Mounting: 2 inch MNPT bung adapter
- Inlet: 7/8 inch O.D.
- Outlet: 3/4 inch height-angle & normal curved
- Maximum fluid viscosity: 4000 SSU


SP65175

DRUM PUMP ROTARY GEARED 200 LITRE

- Used for dispensing or transferring low viscosity and non-corrosive petroleum based fluids, such as petrol, diesel, kerosene, lube, fuel, machine oil, etc.
- Supplied with 2" bung adapter, a rubber delivery hose and non-drip nozzle
- Self-priming unit, dispenses approximately 1 litre per stroke
- Do not use with organic solvents, alkalis, acids and water-based fluids
- Supplied with suction filter to sift the dirt and extend pump life

SPECIFICATIONS:

- Flow: 1L / stroke
- Mounting: 2" MNPT bung adapter
- Inlet: 1-1/4" O.D.
- Outlet: 1" O.D. curved spout
- Maximum fluid viscosity: 500 SS or SAE 30

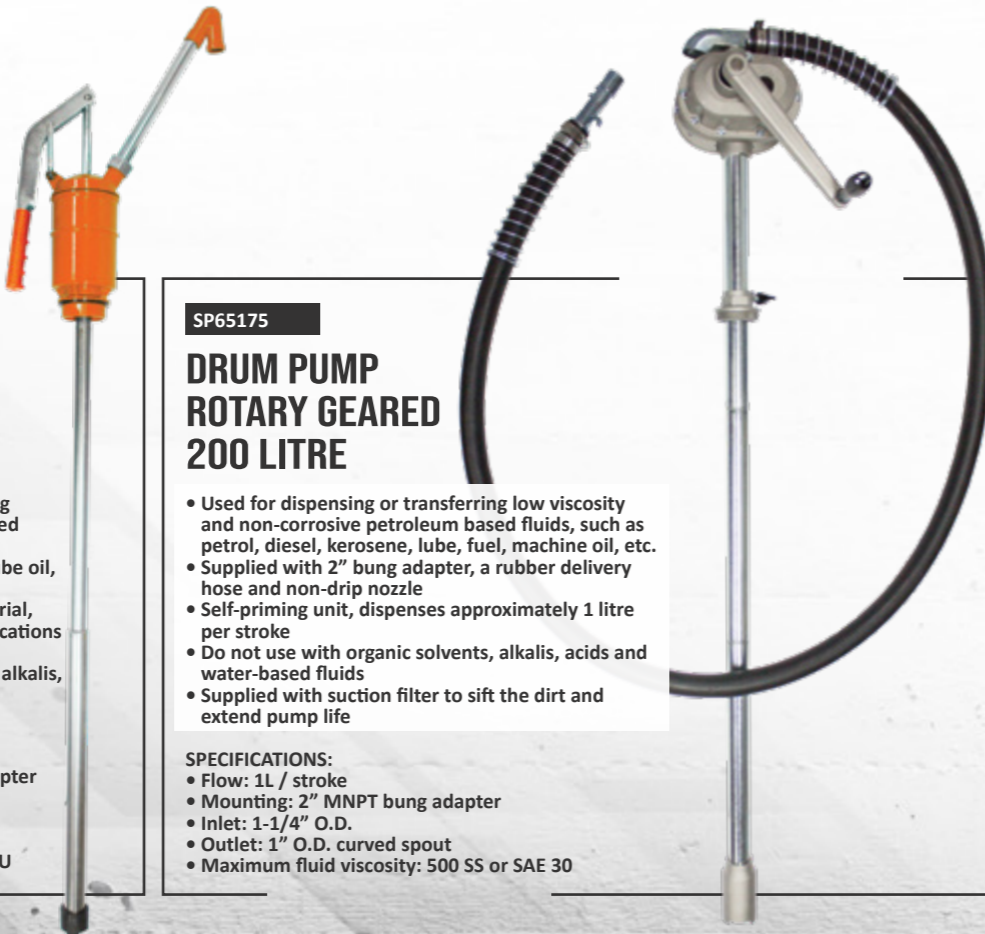

LUBRICATION

SP Tools work closely with the world's leading manufacturers of lubrication equipment. Our product offer is designed to maximise uptime of plant and equipment around the globe. Extensive and continuing research and development ensures SP Tools Lubrication Division is at the forefront of the industry.

GREASE GUNS

SP65108

GREASE GUN VARIABLE STROKE PISTOL GRIP

- 20" flexible hose with heavy duty quick release coupler
- In-line swivel joint, eliminating awkward twisting
- Heavy duty cast aluminium body with textured non-slip grip
- Heavy duty hardened 4 jaw super grip coupler, coupler includes ball check
- Bleeder valve for purging unwanted air
- 2-way loading: Bulk or 450cc grease cartridge
- Coupler and hose locks to pump for easy clean storage
- Air inlet: 1/4"
- Hose size: 3/8" I.D.
- Max pressure: 8000PSI



IN-LINE SWIVEL JOINT
Eliminates awkward twisting

LOCK TECH
Quick-release coupler locks to grease gun for easy storage

Extra long flex hose

Quick-Release Coupler

SP65106

GREASE GUN LEVER ACTION HIGH PRESSURE

- 3-way loading: bulk, filler nipple or 450cc standard grease cartridge
- Heavy duty cast aluminium body with textured non-slip grip
- Heavy duty hardened 3 jaw super grip coupler, coupler includes ball check
- Bleeder valve for purging unwanted air
- 6" curved extension
- Working pressure: 8000PSI
- Max pressure: 10000 PSI



SP65104

GREASE GUN SET - MINI

- Chrome plated finish for longer service life
- Working pressure: 1000 psi
- Capacity bulk: 80ml
- Includes 3 interchangeable tips

INCLUDES 100g TUBE OF LUBRICATION GREASE

- Suitable for automotive applications
- EP additive Molybdenum Disulphide



SUITABLE FOR
Rack and pinion steering, Universal joints and ball joints.

REPLACEMENT LUBRICATION GREASE AVAILABLE - SP65104G



COUPLERS, HOSES & ADAPTORS

SP65140

GREASE GUN QUICK-RELEASE COUPLER & ACCESSORY KIT 6 PIECE

• Heavy-duty lubrication accessory kit contains quick-release couplers, dispensers and adaptors to suit any grease application.

SET INCLUDES

- Quick release grease coupler - 74mm
- Quick release grease coupler - 130mm
- Right angle adaptor
- Grease injector needle
- Seal-off grease dispenser
- Needle nose grease dispenser



SP65131

GREASE COUPLER HEAVY DUTY

- Three hardened jaws
- 2" long coupler tapped for 1/8" pipe threads
- Recommended working pressure: 8000psi



SP65132

GREASE COUPLER RIGHT ANGLE

- Heavy duty
- Reach out-of-the-way zerk fittings such as those on ball joints
- Fits standard grease guns: 1-5/8" long
- 1/8" NPT female inlet
- For use with air operated equipment
- Recommended working pressure: 4500 PSI



SP65135

GREASE COUPLER SWIVEL

- Heavy duty
- Swivels in full 360° circle and locks in place
- 45° angle gives easy access to most grease fittings
- 1/8" NPT female inlet
- For use with air operated equipment
- Recommended working pressure: 4500 PSI



SP65136

GREASE COUPLER QUICK RELEASE

- Designed for use with air powered, battery powered and hand grease guns
- Heavy-duty construction withstands higher pressure
- Four hardened jaws
- 74mm long coupler with 30mm diameter and is tapped for 1/8" pipe threads
- Burst Pressure 15,000psi
- Working pressure 10,000psi.



SP65137

GREASE COUPLER - LONG QUICK RELEASE

- Designed for use with air powered, battery powered and hand grease guns
- Heavy-duty construction withstands higher pressure
- Four hardened jaws
- 130mm long coupler tapped for 1/8" pipe threads
- Burst Pressure 15,000psi
- Working pressure 10,000psi



FLEX HOSES - GREASE GUN

- Fits most grease gun accessories
- Working pressure: 4,500 PSI
- Burst pressure: 12,000 PSI
- 1/8" NPT
- For hard to reach jobs
- For use with air and hand operated grease guns

AVAILABLE IN 2 OPTIONS

LENGTH	MODEL
12" Long	SP65133
18" Long	SP65134



TYRE SERVICE

Accurate tyre inflation is extremely important to the on road safety of a vehicle. At SP Tools we offer a range of both digital and analogue inflators and testers to make sure you get it right.

TYRE INFLATORS/DEFLATORS

SP65510

TYRE INFLATOR WITH DEFLATOR DIGITAL - PROFESSIONAL

- Ideal for automotive, industrial and trade use
- Fast inflation
- Heavy duty aluminium body
- Pressure measuring range: 0-160 PSI (+/- 2% @25C)
- Automatic shut-off
- 390mm Spiral protected flexible rubber hose
- Rubber impact protection
- Dual chuck with 360° Swivel
- Operating pressure: 90PSI
- Air Flow: 1.2CFM at 100PSI
- Air inlet: 1/4" Female

TWO STAGE LEVER CONTROL

DIGITAL DISPLAY
PSI
0-160

DUAL HEAD CHUCK
Ideal design for dual wheel vehicles



SP65900

TYRE INFLATOR WITH DEFLATOR CONVEX LENS GAUGE PROFESSIONAL

- Ideal for automotive, industrial and trade use
- Fast inflation
- Heavy duty aluminium body
- Pressure measuring range: 0-150 PSI | 0-10 Bar | 0-1050 Kpa
- 390mm Spiral protected flexible rubber hose
- Rubber impact protection
- Dual chuck with 360° Swivel
- Operating pressure: 90PSI
- Air Flow: 1.2CFM at 100PSI
- Air inlet: 1/4" Female

TWO STAGE LEVER CONTROL

DUAL HEAD CHUCK
Ideal design for dual wheel vehicles

MULTI SCALE
PSI BAR KPA
0-150 0-10 0-1050



SP65500

TYRE INFLATOR WITH DEFLATOR

- Highly accurate
- Large and easy to read dial
- Gauge fitted with heavy rubber bumper includes 600mm hose with clip-on chuck
- Calibrated: 10-170 PSI in 2lb Increments 70-1200 kPa in 10 kPa increments
- Gauge diameter: 80mm
- Accuracy: +/- (F.S.x1%)+0.5 PSI at 2-100 PSI +/- (F.S.x2%)+0.5 PSI at 101-150 PSI
- Pressure range: 2-150 PSI

