



11

AIR TOOLS

SP AIR IS THE WORLDS PREMIUM MANUFACTURER OF PNEUMATIC TOOLS. FOR OVER 45 YEARS WE HAVE DEVELOPED AND MANUFACTURED AIR TOOLS TO SUIT BOTH AUTOMOTIVE AND INDUSTRIAL APPLICATIONS. WE CONTINUE TO LEAD THE WORLD BY USING INNOVATIVE TECHNOLOGY AND MATERIALS TO CREATE TOOLS THAT SIMPLY OUTLAST ALL THE OTHERS.

SUB-CATEGORIES:

| | |
|-------------------------|-----|
| IMPACT RATCHET WRENCHES | 394 |
| RATCHET WRENCHES | 394 |
| IMPACT WRENCHES | 395 |
| DIE GRINDERS | 399 |
| ANGLE GRINDERS | 400 |
| DRILLS | 401 |
| CUT OFF TOOLS | 401 |
| AIR NIBBLERS | 401 |
| AIR SAWS | 402 |
| RIVETERS | 402 |
| SANDERS/POLISHERS | 403 |
| CHISEL GUNS | 404 |
| NEEDLE SCALERS | 404 |
| OIL & LUBRICANTS | 405 |
| AIR TOOL ACCESSORIES | 405 |
| FITTED AIR HOSES | 406 |





> AIR TOOLS



IMPACT RATCHET WRENCHES



3x
FASTER
THAN NORMAL
MINI RATCHETS



SINGLE DOG HAMMER

SP-7722A

3/8" DR IMPACT RATCHET WRENCH MINI

SPECIFICATIONS

- Hand Torque: 10 - 41Nm
- Length: 155mm
- Capacity: 10mm
- Air consumption: 396L/min Max

3/8"
DRIVE

FEATURES

- 3x Faster than normal mini ratchets
- Ideal for work around engines where room is limited
- Induction hardened ratchet head to increase the life of your tool
- Single dog hammer mechanism
- Heavy duty metal body
- Ergonomic design reduces fatigue
- Lever handle for throttle control
- Forward/reverse

RATCHET WRENCHES



SP-1760A

1/4" DR RATCHET WRENCH - MINI

SPECIFICATIONS

- Hand Torque: 40ft/lbs
- Length: 170mm
- Capacity: 6.35mm
- Air consumption: 485L/min Max

1/4"
DRIVE

FEATURES

- Ideal for work around engines where room is limited
- Induction hardened ratchet head to increase the life of your tool
- Heavy duty metal body
- Ergonomic design reduces fatigue
- Lever handle for throttle control
- Forward/reverse



CONTINUED IMPACT WRENCHES

SP-1762

3/8" DR RATCHET WRENCH - MINI

SPECIFICATIONS

- Hand Torque: 40ft/lbs
- Length: 170mm
- Capacity: 10mm
- Air consumption: 485L/min Max

FEATURES

- Trade favourite for many years
- Ideal for work around engines where room is limited
- Induction hardened ratchet head to increase the life of your tool
- Heavy duty metal body
- Ergonomic design reduces fatigue
- Lever handle for throttle control
- Forward/reverse

3/8" DRIVE

TRADE FAVOURITE FOR MANY YEARS



SP-1133SX

3/8" DR RATCHET WRENCH

SPECIFICATIONS

- Hand Torque: 124ft/lbs
- Length: 254mm
- Capacity: 12mm
- Air consumption: 525L/min Max

FEATURES

- Ideal for engine repairs, tune-ups and radiator work
- Induction hardened ratchet head to increase the life of your tool
- Heavy duty metal body
- Ergonomic design reduces fatigue
- Lever handle for throttle control
- Forward/reverse

3/8" DRIVE



SP-1133SX-2

1/2" DR RATCHET WRENCH

SPECIFICATIONS

- Hand Torque: 124ft/lbs
- Length: 254mm
- Capacity: 16mm
- Air consumption: 525L/min Max

FEATURES

- Ideal for engine repairs, tune-ups and radiator work
- Induction hardened ratchet head to increase the life of your tool
- Heavy duty metal body
- Ergonomic design reduces fatigue
- Lever handle for throttle control
- Forward/reverse

1/2" DRIVE



IMPACT WRENCHES



SINGLE DOG HAMMER

SP-2136

3/8" DR IMPACT WRENCH - PALM

SPECIFICATIONS

- Bolt Busting Torque: 190Nm
- Max Torque: 135Nm
- Working Torque: 60Nm
- Length: 155mm
- Capacity: 12mm
- Weight: 0.46kg
- Air consumption: 485L/min Max

FEATURES

- Designed for general automotive applications
- Ideal for cramped/confined spaces in small engine repair and other general service work
- Butterfly trigger with forward & reverse - adjust speed smoothly in either direction in one continuous motion
- 360° Air inlet swivel for easy manoeuvrability
- Single dog hammer mechanism
- Rear exhaust

3/8" DRIVE

IMPACT WRENCHES CONTINUED

1/2" DRIVE

COMPACT DESIGN
93mm Long Inc. Anvil.
Perfect for confined spaces



SINGLE DOG HAMMER



SP-1141B

1/2" DR IMPACT WRENCH - COMPACT

SPECIFICATIONS

- Bolt Busting Torque: 970Nm
- Max Torque: 420Nm (forward) 705Nm (reverse)
- Working Torque: 380Nm
- Length: 93mm
- Capacity: 16mm
- Weight: 1.34kg
- Air consumption: 808L/min Max

FEATURES

- Ideal for mechanical workshops
- 93mm Head (including anvil) - Perfect for hard to reach and confined areas
- Single dog hammer mechanism
- 4 torque settings
- Forward/reverse
- Handle exhaust

SET INCLUDES

- 1/2" Dr Compact Impact Wrench
- Impact Socket Rail Set - 6pt - 5 Piece
Sizes Included: 13, 14, 17, 19 & 22mm

1/2" DRIVE

SP-9149

1/2" DR IMPACT WRENCH

TORQUE SETTINGS

| | FORWARD | REVERSE |
|-----------|---------|---------|
| SETTING 1 | 325Nm | 369Nm |
| SETTING 2 | 368Nm | 413Nm |
| SETTING 3 | 569Nm | 575Nm |
| SETTING 4 | 596Nm | 596Nm |

SPECIFICATIONS

- Bolt Busting Torque: 1700Nm
- Max Torque: 1190Nm
- Working Torque: 596Nm
- Capacity: 16mm

FEATURES

- Ideal for the automotive and tyre industry
- Industrial twin dog hammer mechanism
- Super Fast, High Power 8 Vane Rotor
- Lightweight composite body
- Forward/reverse
- Powerful & durable
- Handle exhaust

HIGH TORQUE



TWIN DOG HAMMER



1/2" DRIVE

SP-1140EX

1/2" DR RATCHET WRENCH

SPECIFICATIONS

- Bolt Busting Torque: 1140Nm
- Max Torque: 815Nm
- Working Torque: 500Nm
- Length: 240mm
- Capacity: 16mm
- Weight: 2.6kg
- Air consumption: 870L/min Max

FEATURES

- Ideal for the tyre industry
- Industrial twin dog hammer mechanism
- 4 torque settings
- Forward/reverse
- Powerful & durable
- Handle exhaust



TWIN DOG HAMMER



ALSO AVAILABLE

1/2" DR RATCHET WRENCH LONG ANVIL

SP-1140EXL



CONTINUED **IMPACT WRENCHES**



SP-1158M
3/4" DR IMPACT WRENCH - STUBBY

SPECIFICATIONS

- Bolt Busting Torque: 1900Nm
- Max Torque: 1500Nm
- Working Torque: 900Nm
- Length: 200mm
- Capacity: 25mm
- Weight: 5.1kg
- Air consumption: 1080L/min Max

FEATURES

- Heavy duty - Ideal for the trucking and tyre industry as well as industrial applications
- Induction hardened, industrial single jumbo dog hammer mechanism
- Stubby size allows you to work in tighter spaces
- 5 torque settings
- Forward/reverse
- Low vibration
- Powerful & durable
- Handle exhaust
- High Torque
- Includes Nitto style air fitting

3/4" DRIVE

SP-1156TR
1/2" DR IMPACT WRENCH

SPECIFICATIONS

- Bolt Busting Torque: 1800Nm
- Max Torque: 1290Nm
- Working Torque: 1000Nm
- Length: 280mm
- Capacity: 25mm
- Weight: 5.4kg
- Air consumption: 971L/min Max

FEATURES

- Heavy duty - Ideal for the trucking and tyre industry as well as industrial applications
- Twin regulated high performance pin type hammer, delivering torque fast
- 6 torque settings
- Forward/reverse
- Powerful & durable
- Low vibration
- Handle exhaust
- High Torque



3/4" DRIVE

SP-1158
3/4" DR RATCHET WRENCH

SPECIFICATIONS

- Bolt Busting Torque: 1900Nm
- Max Torque: 1500Nm
- Working Torque: 900Nm
- Length: 380mm
- Capacity: 25mm
- Weight: 6.5kg
- Air consumption: 1080L/min Max

FEATURES

- Heavy duty - Ideal for industrial applications
- Induction hardened, industrial single jumbo dog hammer mechanism
- 5 torque settings
- Forward/reverse
- Powerful & durable
- Handle exhaust
- High Torque



3/4" DRIVE

ALSO AVAILABLE
3/4" DR RATCHET WRENCH LONG ANVIL
SP-1158L



IMPACT WRENCHES CONTINUED

SP-1190P

**1" DR INDUSTRIAL
IMPACT WRENCH**

SPECIFICATIONS

- Bolt Busting Torque: 2900Nm
- Max Torque: 2440Nm
- Working Torque: 1350Nm
- Length: 250mm
- Capacity: 38mm
- Weight: 9kg
- Air consumption: 1130L/min Max

FEATURES

- Ideal for industrial applications
- Induction hardened, industrial single dog hammer mechanism
- Adjustable torque settings
- Heavy duty
- High Torque
- Multi position handle

1"
DRIVE



EXTREME TORQUE



SINGLE DOG HAMMER



SP-1190-2

**1" DR INDUSTRIAL
IMPACT WRENCH**

SPECIFICATIONS

- Bolt Busting Torque: 3500Nm
- Max Torque: 2990Nm
- Working Torque: 1350Nm
- Length: 480mm
- Capacity: 45mm
- Weight: 10.67kg
- Air consumption: 1130L/min Max

FEATURES

- Ideal for industrial applications
- Induction hardened, industrial single dog hammer mechanism
- Adjustable torque settings
- Heavy duty
- High Torque
- Multi position handle

1"
DRIVE

EXTREME TORQUE



SINGLE DOG HAMMER

ALSO AVAILABLE



SP-1190-8

**1" DR INDUSTRIAL
IMPACT WRENCH
LONG ANVIL - 8"**

FEATURES

- Ideal for industrial applications
- Long 8" long anvil for harder to reach areas where clearance is limited
- Induction hardened, industrial single dog hammer mechanism
- Adjustable torque settings
- Heavy duty
- High Torque
- Multi position handle

1"
DRIVE

EXTREME TORQUE



SINGLE DOG HAMMER

DIE GRINDERS

SP-1900

1/8" MICRO AIR GRINDER

SPECIFICATIONS

- Free speed: 70,000rpm
- Length: 156mm
- Capacity: 3mm
- Weight: 350g
- Air consumption: 0.14m³/m in 465L/min Max

FEATURES

- Ideal for precision grinding welding surfaces, cleaning and polishing various metals and porting cylinder heads
- Slim, lightweight, durable and comfortable to use and hold
- High-speed rotation with variable speed throttle control up to 70,000rpm
- Extremely flexible 1.5m long hose
- Rear air exhaust



IDEAL FOR PRECISION GRINDING

SP-1210

1/4" DIE GRINDER STRAIGHT

SPECIFICATIONS

- Free speed: 23,000rpm
- Length: 145mm
- Capacity: 6.35mm
- Weight: 0.54Kg
- Air consumption: 603L/min Max
- Air inlet size: 1/4" NPT
- Air hose size: 3/8" Inside I.D

FEATURES

- Ideal for neatening welds, smoothing sharp edges, de-burring, porting, polishing and grinding back metals
- Graduated trigger control
- Safety lock throttle lever prevents accidental start up
- Lightweight, durable, heavy duty robust alloy body
- Ergonomic design cushion grip handle
- Front exhaust



SP-7220

1/4" DIE GRINDER STRAIGHT

SPECIFICATIONS

- Free speed: 20,000rpm
- Length: 175mm
- Capacity: 6.35mm
- Weight: 0.62Kg
- Air consumption: 133L/min Max
- Air inlet size: 1/4" NPT
- Air hose size: 3/8" Inside I.D

FEATURES

- Ideal for neatening welds, smoothing sharp edges, de-burring, porting, polishing and grinding back metals
- Graduated trigger control
- Safety lock throttle lever prevents accidental start up
- Lightweight, durable, heavy duty composite body
- Ergonomic design cushion grip handle
- Built-in power regulator
- Rear exhaust



COMPOSITE BODY LIGHTWEIGHT

SP-7210L

1/4" DIE GRINDER STRAIGHT - EXTENDED

SPECIFICATIONS

- Free speed: 21,000rpm
- Length: 259mm
- Capacity: 6.35mm
- Weight: 0.90Kg
- Air inlet size: 1/4" NPT
- Air hose size: 3/8" Inside I.D

FEATURES

- Ideal for neatening welds, smoothing sharp edges, de-burring, porting, polishing and grinding back metals
- Extended shank - Ideal for areas where extra reach is required
- Graduated trigger control
- Safety lock throttle lever prevents accidental start up
- Lightweight, durable, heavy duty composite body
- Ergonomic design cushion grip handle
- Built-in power regulator
- Rear exhaust



COMPOSITE BODY LIGHTWEIGHT

DIE GRINDERS CONTINUED

SP-7211

1/4" DIE GRINDER ANGLE HEAD

SPECIFICATIONS

- Free speed: 18,000rpm
- Length: 175mm
- Capacity: 6.35mm
- Weight: 0.80Kg
- Air pressure: 90psi
- Air consumption: 93L/min Max
- Air inlet size: 1/4" NPT
- Air hose size: 3/8" Inside I.D

FEATURES

- 90° angle head, ideal in tight spaces
- Graduated trigger control
- Safety lock throttle lever prevents accidental start up
- Lightweight, durable, heavy duty composite body
- Ergonomic design cushion grip handle
- Built-in power regulator
- Rear exhaust



COMPOSITE BODY
LIGHTWEIGHT

ANGLE GRINDERS



SP-2254

ANGLE GRINDER AUTOMOTIVE - 100MM

SPECIFICATIONS

- Free Speed: 12,000RPM
- Capacity: 100mm
- Length: 225mm
- Air Con: 566L/min Max
- Weight: 1.72kg

FEATURES

- Spiral bevel gears for low vibration
- Safety lock throttle lever prevents accidental start up
- Side handle



SP-2257

ANGLE GRINDER AUTOMOTIVE - 125MM

SPECIFICATIONS

- Free Speed: 11,000RPM
- Capacity: 125mm
- Length: 225mm
- Air Con: 566L/min Max
- Weight: 1.76kg

FEATURES

- Spiral bevel gears for low vibration
- Safety lock throttle lever prevents accidental start up
- Side handle



SP-1257

ANGLE GRINDER INDUSTRIAL - 125MM

SPECIFICATIONS

- Free Speed: 12,000RPM
- Capacity: 125mm
- Length: 229mm
- Air Con: 566L/min Max
- Weight: 1.76kg

FEATURES

- Spiral bevel gears for low vibration
- Safety lock throttle lever prevents accidental start up
- Side handle

DRILLS
SP-1511
3/8" DR DRILL - PISTOL TYPE INDUSTRIAL
SPECIFICATIONS

- Free Speed: 2,500RPM
- Capacity: 9.5mm
- Length: 152mm
- Weight: 0.74kg

FEATURES

- Ideal for production lines
- Geared chuck
- Lightweight - Only 740g


SP-2510AH
3/8" DR DRILL - KEY TYPE ANGLED HEAD
SPECIFICATIONS

- Free speed: 1,800rpm
- Length: 208mm
- Capacity: 9.5mm
- Weight: 1.19kg

FEATURES

- Ideal for drilling in tight areas
- Safety lock throttle lever prevents accidental start up
- Forward and reverse


CUT OFF TOOL
**COMPOSITE BODY
LIGHTWEIGHT**

SP-7230
CUT OFF TOOL - 3"
SPECIFICATIONS

- Free Speed: 20,000RPM
- Capacity: 1.5mm
- Length: 240mm
- Air consumption: 113 L/min max
- Weight: 0.68kg

FEATURES

- Ergonomic design cushion-grip handle
- Rear exhaust
- Safety lock throttle lever
- Built-in power regulator
- Metal guard

AIR NIBBLER
SP-2215
AIR NIBBLER AUTOMOTIVE
SPECIFICATIONS

- Length: 185mm
- Air Con: 470L/min Max
- Weight: 1.02kg

FEATURES

- Cuts free of sharp edges and burrs
- Ideal for auto body & panel repairs as well as flat, corrugated or profiled sheet metals

ABLE TO CUT

- 14 Gauge Steel - 1.6mm
- Stainless Steel - 1.2mm



AIR SAW



SP-2730

AIR SAW - STRAIGHT

SPECIFICATIONS

- Free Speed: 10,000 Strokes per minute
- Capacity: 1.5mm
- Length: 240mm
- Air consumption: 360 L/min max
- Weight: 1.3kg

SET INCLUDES

- Straight Air Saw
- 24 teeth blade
- 32 teeth blade

SPEED
10000 Strokes P/Min

RIVETERS

SP-2306

INDUSTRIAL RIVETER - 3/16"

- Capacity: 3/16"
- Pulling Power: 2,100lbs (953kg)
- Weight: 1.49kg
- Air Consumption: 113L/Min

FEATURES

- Easy setup / low maintenance
- 3 Jaw clamping chuck for increased grip & extended jaw life
- Sets 2.4, 3.2, 4.0 & 4.8mm rivets on all materials (aluminium, steel & stainless steel)
- Interchangeable nose tips included
- Attached collection bottle

PULLING FORCE
953kg

COLLECTION BOTTLE

SETS RIVET SIZES



SP-2308

INDUSTRIAL RIVETER - 1/4"

- Capacity: 1/4"
- Pulling Power: 3,100lbs (1407kg)
- Weight: 1.97kg
- Air Consumption: 113L/Min

FEATURES

- Easy setup / low maintenance
- 3 Jaw clamping chuck for increased grip & extended jaw life
- Sets 3.2, 4.0, 4.8, 5.6 & 6.4mm rivets on all materials (aluminium, steel & stainless steel)
- Interchangeable nose tips included
- Attached collection bottle

PULLING FORCE
1407kg

COLLECTION BOTTLE

SETS RIVET SIZES



SANDERS/POLISHERS

SP-2331H

GASKET SANDER KIT 2" (50MM)

SPECIFICATIONS

- Free Speed: 16,000RPM
- Capacity: 50mm
- Thread size: 6mm x 1.25mm Pitch
- Weight: 1.8kg

SANDER FEATURES

- Multiple speed settings
- Ergonomic grip/trigger designed for operator comfort
- Lightweight composite body

KIT INCLUDES

- 50mm (2") Gasket Sander
- 4x Surface Prep Discs (Medium Grit)
- 8x Surface Prep Discs (Coarse Grit)
- 4x Sanding Discs (#120 Grit)
- 4x Sanding Discs (#80 Grit)
- Housed in heavy duty blow mould storage case



SP-1330H

DISC SANDER 2" (50MM)

SPECIFICATIONS

- Free Speed: 12,000RPM
- Length: 125mm
- Capacity: 50mm
- Air Consumption: 469L/min Max
- Weight: 0.67kg

FEATURES

- Multiple speed settings
- Ergonomic grip/trigger designed for operator comfort



SP-2370

BELT SANDER 10MM

SPECIFICATIONS

- Free Speed: 16,000RPM
- Length: 275mm
- Capacity: 10 x 330mm
- Air Consumption: 647L/min Max
- Weight: 1kg

FEATURES

- 360° adjustable sanding arm
- Heavy duty lightweight construction
- Quick change belt replacement lever
- Graduated trigger control
- Ergonomic design cushion grip handle
- Includes 2 piece 10mm sanding belts

KIT INCLUDES

- Belt Sander
- 1x 80 grit belt
- 1x 120 grit belt



ORBIT SANDERS DUST FREE

AVAILABLE IN 2 SIZES

| ORBIT | MODEL |
|-------|---------|
| 2.5mm | SP-3600 |
| 5mm | SP-3605 |

- Free Speed: 10,000RPM
- Length: 225mm
- Capacity: 150mm
- Air Consumption: 448L/min Max
- Weight: 0.95kg

FEATURES

- Perfectly balanced sanding pad
- Low sound and vibration
- Graduated pressure trigger control and speed control adjuster
- Lightweight and ergonomic design
- Contoured palm grip for one hand operation
- Dust hose and dust bag included
- Rear exhaust
- Makes fast work of smoothing body filler, fibreglass and wood

KIT INCLUDES


- Velcro Backing Pad, Bag and Hose



CHISEL GUNS

- Essential for industrial and auto repair applications
- Ideal for general cutting, body panel crimping, shearing, rust/paint removal, chipping and scraping.
- Trade quality alloy steel barrel and heat-treated piston
- Comfortable non-slip ergonomic grip

- Graduated trigger control
- Built-in air regulator
- Quick change coil spring retainer allows for fast and easy chisel changes
- Handle exhaust

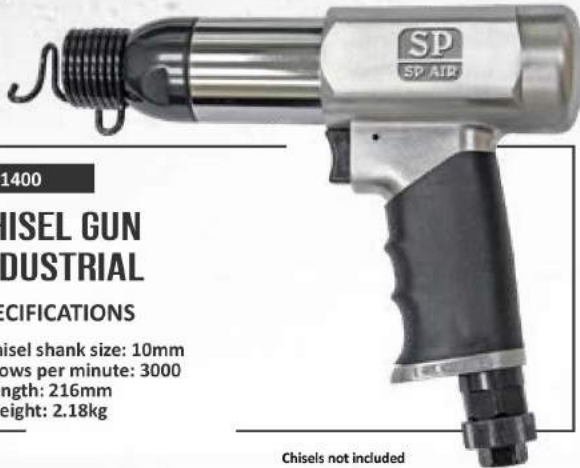

SP-1400

CHISEL GUN INDUSTRIAL

SPECIFICATIONS

- Chisel shank size: 10mm
- Blows per minute: 3000
- Length: 216mm
- Weight: 2.18kg

Chisels not included



SP-1405

CHISEL GUN AUTOMOTIVE

SPECIFICATIONS

- Chisel shank size: 10mm
- Blows per minute: 3000
- Length: 166mm
- Weight: 1.4kg

Chisels not included

NEEDLE SCALERS

SP-2470

NEEDLE SCALER STRAIGHT - INDUSTRIAL

- Needle diameter: 1/8 x 7
- Number of needles: 19
- Length: 420mm
- Weight: 2.7kg
- Ideal for removal of rust, scale, paint etc
- Needles adjust automatically to contours



SP-2472

NEEDLE SCALER STRAIGHT - COMPOSITE

- Needle diameter: 1/8 x 7
- Number of needles: 12
- Length: 345mm
- Weight: 2.4kg
- Ideal for removal of rust, scale, paint etc
- Needles adjust automatically to contours



SP-2482

NEEDLE SCALER PISTOL

- Needle diameter: 1/8 x 7
- Number of needles: 19
- Length: 330mm
- Weight: 2.7kg
- Ideal for removal of rust, scale, paint etc
- Needles adjust automatically to contours



AIR TOOL ACCESSORIES

OIL & LUBRICANTS



AIR TOOL LUBRICANT

AVAILABLE IN 3 SIZES

| BOTTLE SIZE | MODEL |
|-------------|-----------|
| 500ml | SPAO500s |
| 1 Litre | SPAO1000s |
| 4 Litre | SPAO4000 |

Premium quality air tool oil, specially formulated to lubricate and protect air tools as well as maximise performance and prolong service life. Designed to prevent wear, rust and oxidation to ensure a reliable and trustworthy tool that is always ready to tackle the job at hand.

- Lubricates and Protects
- Removes Moisture
- Maximises Tool Performance
- Prolongs Tool Life
- Premium Quality Oil



COMPRESSOR OIL

AVAILABLE IN 2 SIZES

| BOTTLE SIZE | MODEL |
|-------------|-----------|
| 1 Litre | SPCO1000s |
| 4 Litre | SPCO4000 |

Specially formulated premium quality oil provides superior pump wear and corrosion protection, thus ensuring maximum pump performance, reduced vibration and minimal pump noise. Active cleansing technology clears all unwanted sludge and prolongs service life.

- Superior Wear & Corrosion Protection
- Maximises Pump Performance
- Minimises Vibration and Pump Noise
- Active Cleansing Technology
- Premium Quality Oil
- Prolongs Service Life

INLINE OILERS, REGULATORS & COUPLERS

MOL-21

INLINE MINI AIR TOOL OILER / LUBRICATOR

DRIP FEEDS LUBRICANT



- Provides automatic constant lubrication for air tools, when placed inline
- Drip feeds lubricant to air tool
- Transparent reservoir lets you see when oil level is low
- Extends air tools service life by ensuring the tool is constantly well lubricated
- 1/4" BSP

RG-30

INLINE REGULATOR



- Regulate air pressure with fine adjustment
- High quality brass construction
- 1/4" BSP

SP910A

AIR LINE UNIVERSAL COUPLER



- Max pressure: 170Psi
- Working Pressure: 90Psi
- 1/4" BSP
- Air Flow: 11Cfm (310 Litres/min)
- Composite plastic

FITTED AIR HOSES

FITTED AIR HOSES PREMIUM QUALITY

AVAILABLE IN 2 SIZES

- Made from an engineered hybrid polymer that provides superior all weather flexibility, even in freezing temperatures (Temp. range: -5°C ~ 65°C)
- Designed to hold up to the shop environment with an excellent abrasion resistant outer cover.
- Hose will not kink when under pressure.
- Max working pressure: 300PSI
- Designed to work smart & last long with a lightweight body and One-Touch Nitto style couplers, this hose is built to work as hard as you do.

EXTREME FLEXIBILITY

PREMIUM QUALITY

HIGH VISIBILITY SAFETY ORANGE



ABRASION RESISTANT

ONE-TOUCH COUPLERS

- One-Touch Nitto™ style
- Swaged hose clamps
- 10mm / 3/8" I.D



SECURELY CRIMPED ASSEMBLY OF HOSE, COUPLING BARB & FERRULE



Securing these fittings by crimping provides an interlocking assembly of hose, coupling barb and ferrule - maximising the hose assembly's sealing and assuring a 300psi working pressure.

ANTI-KINK HYBRID POLYMER MATERIAL BONDED WITH POLYESTER BRAID

These combined materials remain flexible in a temperature range between -5°C to 65°C and has the added advantage that it will not kink under pressure.



The unique no memory characteristics of the Hybrid Polymer ensures a hose that will lay flat and not curl when unrolled from storage

- Extreme flexibility
- Abrasion resistant
- Easy to roll up for quick and effortless storage
- High visibility safety orange
- No memory technology
- Anti-kink
- UV treated



| LENGTH | MODEL |
|-----------|----------|
| 15 Meters | SP66-15N |
| 30 Meters | SP66-30N |

CHISEL GUN ACCESSORIES

CHI-SP1

CHISEL SPRING RETAINER STANDARD



- Replacement chisel spring
- For quick replacement of a broken or worn air chisel spring
- Secures chisel bit to air chisel/hammer during operation of tool
- Standard size fits most brands of air chisel/hammers
- Replace springs periodically for optimum tool performance

CHISELS - HEAVY DUTY

WIDE SCRAPER 50 X 170MM

- Ideal for removing gaskets, rust, undercoating and paint
- 170mm long
- 20mm tip



D06

FLAT BLADE 20 X 170MM

- Ideal for general body repair or replacement
- 170mm long
- 20mm tip



D23

PANEL CUTTER 170MM

- Ideal for cutting spot welds and trimming sheet metal
- 170mm long
- Panel cutter tip



D59

RIVET AND BOLT CUTTER 20 X 170MM

- Ideal for body, chassis and exhaust applications
- 170mm long
- 20mm tip



D60



AIR GRINDER COLLETS

**DIE GRINDER COLLETS
INDIVIDUAL**

| TEETH | MODEL |
|-------|--------|
| 1/4" | C127-4 |
| 6mm | C127-6 |
| 1/8" | C127-8 |




Replacement collet for most die grinders

AIR SAW BLADES

**AIR SAW BLADES
PACKS OF 4**

| TEETH | FOR CUTTING | MODEL |
|----------|-------------|----------|
| 32 Teeth | STEEL | SAW-B100 |
| 24 Teeth | ALUMINIUM | SAW-C100 |



4 blades in each pack

DRILL CHUCKS & KEYS

**DRILL CHUCK
KEY TYPE
3/8"**

| SIZE | MODEL |
|------------|--------|
| 3/8"x24tpi | DLC-9 |
| 1/2"x20tpi | DLC-15 |



**DRILL CHUCK
KEYLESS
1/2"**

| SIZE | MODEL |
|------------|--------|
| 1/2"x20tpi | DLC-17 |



**CHUCK KEY
3/8"**



DCK-2

SANDER ABRASIVE DISCS AND ACCESSORIES

**PD-6HV
SANDING PAD
6"**



- 6" Sanding Pad
- Suits D/A Sanders
- Dust Free
- Velcro Type

GASKET SANDER DISCS

- Packs of 4 Discs
- Fine disc for use on aluminium cylinder heads
- Course disc for use on cast iron cylinder heads
- Suits 2" (50mm) gasket sanders



| GRIT TYPE | |
|-----------|---------|
| TYPE | MODEL |
| Fine | SP-2051 |
| Course | SP-2053 |

ALSO AVAILABLE IN 50 PIECE BULK PACKS

Pack of 50 Discs



| GRIT TYPE | |
|-----------|----------|
| TYPE | MODEL |
| Fine | SP-2051B |
| Course | SP-2053B |

**SP-205D
GASKET REMOVAL KIT**

- Gasket Sander Pad - 2"
- Spindle
- 2 x course discs
- 2 x fine discs



**SP-205A
GASKET SANDER
PAD & SPINDLE**

- Pad - 2"
- Spindle



AIR DUSTERS

AIR DUSTERS

- Provides a controlled flow of air, ideal for the cleaning of machinery
- Long angled nozzle provides for convenient, fast & easy access for a wide range of applications
- Air inlet thread NPT: 1/4"



**SP-111
LONG NOZZLE**
• Length: 100mm

**SP-113
EXTRA LONG NOZZLE**
• Length: 750mm



AVAILABLE IN 2 SIZES